

D0 Series Fuse Bottle

Low Voltage Fuse Links

multicomp PRO



2211001, 2211002, 2211003
2211004, 2211005



2212001, 2212002, 2212003
2212004, 2212005

Description

D0 fuse-links are used as the most reliable protection of electroinstallation, control and signal circuits against overload and short-circuit currents. The whole system D0 contains a complete range of fuse-links, standard ceramic and new plastic bases, fuse disconnectors and all necessary accessories. It is dimensioned for rated voltages 400V AC, resp. 250V DC. The system D0 is intended to be used in residential, business and similar buildings. When it is used in industrial plants, it is necessary to take into account the requirements of the standard IEC 60664-1 concerning the air insulation distances, creeping distances and mounting distances.


Advantages of D0 are the following:

- Low power loss
- Smaller warming
- Saving of storage and mounting place
- Constant quality control of parts and final products

Technical data:

Rated voltage UN	: 400V- 250V
Rated current I _N	: D01 2- 16 A & D02 20-63 A
Breaking capacity at 1, 1U _N	: 50kA cos φ = 0, 1 8kA ~ T = 15ms
Fusing characteristics	: gG (gl)

Fuse-Links D01 gG (gl) for fuse base E 14

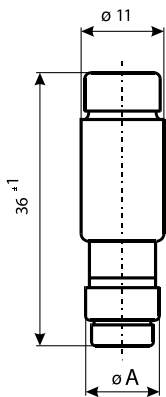

Part Number	Colour	I _N (A)	Weight (g)	Dimension (øA)	Packaging (Pcs)
2211001	Pink	2	6	7.3	10/500
2211002	Brown	4	6	7.3	10/500
2211003	Green	6	6	7.3	10/500
2211004	Red	10	6	8.5	10/500
2211005	Grey	16	6	9.7	10/500


Dimensions : Millimetres

DO Series Fuse Bottle

Low Voltage Fuse Links

multicomp PRO

Fuse-Links 002 gG (gl) for fuse base E 18

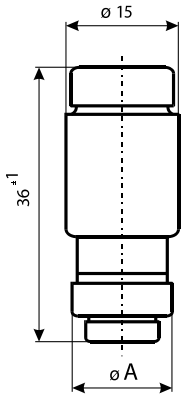

Part Number	Colour	IN (A)	Weight (g)	Dimension ($\varnothing A$)	Packaging (Pcs)
2212001	Blue	20	11	10.9	10/500
2212002	Yellow	25	12	12.1	10/500
2212003	White	35	13	13.3	10/500
2212004	White	50	13	14.5	10/500
2212005	Copper	63	15	15.9	10/500

Dimensions : Millimetres

Part Number Table

Description	Part Number
Fuse, Bottle, GL, 2A, D01	2211001
Fuse, Bottle, GL, 4A, D01	2211002
Fuse, Bottle, GL, 6A, D01	2211003
Fuse, Bottle, GL, 10A, D01	2211004
Fuse, Bottle, GL, 16A, D01	2211005
Fuse, Bottle, GL, 20A, D02	2212001
Fuse, Bottle, GL, 25A, D02	2212002
Fuse, Bottle, GL, 35A, D02	2212003
Fuse, Bottle, GL, 50A, D02	2212004
Fuse, Bottle, GL, 63A, D02	2212005

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicomp PRO