

# Harmony XB6E and XB6 plastic

Control and signaling units Ø 16

# Quick access to product information

## Get technical information about your product

References

**Modicon TM3**  
I/O expansion modules for Modicon controllers  
Analog I/O modules

References	Input range	Resolution	Input terminal block (T)	Reference	Weight (kg)
2 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	16 000 or 16 000 + sign	0580.2 0580.2	TM3A201 TM3A202	0.150 0.254
4 voltage/current inputs	-10...+10 VDC 0...+10 VDC 0...20 mA / -20 mA	12 000 or 11 000 + sign	0580.2 3110.15	TM3A401 TM3A402	0.200 0.200
4 voltage/current or temperature inputs (I, K, R, S, E, T, N, E, C)	Thermopiles (I) I, K, R, S, E, T, N, E, C Temperature inputs RTD (Pt100, Pt1000) 0...+10 VDC 0...20 mA / -20 mA	16 000 or 16 000 + sign	3110.15 2100.15	TM3T01 TM3T02	0.200 0.200
4 differential temperature inputs	Thermopiles (I) I, K, R, S, E, T, N, E, C 0...+10 VDC 0...20 mA / -20 mA	16 000 or 16 000 + sign	3110.15 2200.15	TM3T03 TM3T04	0.200 0.200
4 voltage/current	-10...+10 VDC	12 000 or 11 000 + sign	0580.2	TM3A01	0.150

Life Is On Schneider Electric

Search products, documents & more

My Products My Documents Partner Portal

PRODUCTS SOLUTIONS SERVICES SUPPORT ABOUT US

All products Industrial Automation and Control PLC, PAC and Distributed Controllers Distributed Input/Output (I/O) Modules Modicon TM3

View all Modicon TM3

**TM3AI2H**

Module TM3 - 2 analog inputs high resolution

Show more characteristics

Related Software

Product Datasheet User guide Catalogue CAD Document

Characteristics Documents and Downloads Technical FAQs Additional Information Dimensions Drawings

Main

range of product Modicon TM3


product or component type Analog input module

range compatibility Modicon M351  
Modicon M221  
Modicon M241

Each commercial reference presented in a catalog contains a hyperlink. Click on it to obtain the technical information of the product:

- Characteristics, Dimensions and drawings, Mounting and clearance, Connections and schemas, Performance curves
- Product image, Instruction sheet, User guide, Product certifications, End of life manual

## Find your catalog

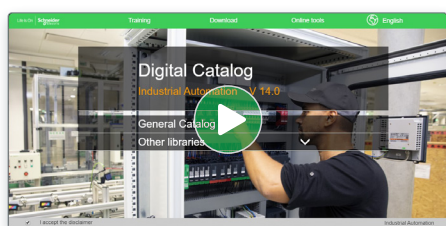

- > With just 3 clicks, you can access the Industrial Automation and Control catalogs, in both English and French
- > Consult digital automation catalogs at [Digi-Cat Online](#)

General Catalog

Four-wire, Switches, Pilot Lights & Indicators

Pushbuttons, Switches, Pilot Lights & Indicators

Beams, Callings & Interlocks

Signaling Devices

IRB (Interlocks and industrial PLC)

Sensors & RFID Systems

Motor Starters and Load Management

Components for Motor Starters

Variable Speed Drives & Soft Starters

Motor Control & Protection

Interface, Measurement & Control Relays

PLC, PAC & other Controllers

360°

- Up-to-date catalogs
- Embedded product selectors, 360° pictures
- Optimized search by commercial references

## Select your training



- > Find the right [Training](#) for your needs on our Global website
- > Locate the training center with the selector tool, using this [link](#)

Training and courses

Training by domain of expertise

Electrical Installation and Safety

Data Center

Industrial Automation

Life Is On

Schneider Electric



# Harmony

## Discover **Harmony**

Advanced operator interface and industrial relays

**Harmony** operator interface and industrial relays enhance operational efficiency and equipment availability across industrial and building applications. **Harmony** includes intelligent connected products and edge terminals that visualize, gather and process data, enabling informed operator decisions

## Explore our offer

- **Harmony** Push Buttons and Switches
- **Harmony** HMI Operator Terminals, IPC and EdgeBox
- **Harmony** Signaling Devices
- **Harmony** Electrical Relays
- **Harmony** Safety

Life Is **On**

**Schneider**  
Electric

# General contents

## Harmony® XB6E and Harmony® XB6, control and signaling units Ø 16 mm plastic

**Selection guide** ..... page 4

### Harmony XB6E monolithic, IP 65

#### ■ General

- Presentation of range ..... page 6
- Presentation of complete units ..... page 7

#### ■ References

- Pushbuttons, spring return, latching
  - Non illuminated, spring return ..... page 10
  - Illuminated with integral LED, spring return ..... page 12
  - Illuminated with integral LED, latching ..... page 13
- Pilot lights
  - With integral LED ..... page 11
- Emergency stop
  - Illuminated and non-illuminated ..... page 13
- Selector switches
  - With standard handle and key switches ..... page 14
- Accessories
  - Fast connector socket ..... page 15
  - Labels for Emergency stop pushbuttons ..... page 15

### Harmony XB6 modular

#### ■ General

- Presentation of range ..... page 16
- Presentation of complete units ..... page 18
- Presentation of sub-assemblies ..... page 20

#### ■ References

- Pushbuttons, spring return, latching
    - Illuminated with integral LED, spring return ..... page 22
    - Illuminated with integral LED, latching ..... page 24
    - Non illuminated, spring return ..... page 26
  - Pilot lights
    - With integral LED ..... page 25
  - Emergency stop
    - Non-illuminated ..... page 28
  - Selector switches
    - With standard handle ..... page 29
    - Illuminated ..... page 31
    - Key switches ..... page 33
  - Complete bodies
    - For pushbuttons and selector switches ..... page 36
    - For pilot lights ..... page 37
  - Separate contact blocks ..... page 37
  - Accessories
    - Accessories for heads ..... page 38
    - Legends and legend holders ..... page 42
    - Accessories for pushbuttons and pilot lights ..... page 45
- **Product reference index** ..... page 46



# Control and signaling units Ø 16 plastic

Pushbuttons, switches and pilot lights

Harmony XB6E monolithic, IP 65 and XB6 modular

Harmony® range of products with IP 65 degree of protection

### Wide choice of compact products

The Harmony XB6E monolithic and XB6 modular range are used for a wide range of control and signaling products. Their reduced diameter (Ø 16 mm/0.630 in.) makes them suitable for installation on small machines and control panels. This range offers flexible and simple setup for complete products and separate components.

The Harmony XB6E range are available in the form of complete units and the XB6 range in the form of complete units or sub-assemblies. These range allow the end-user to choose the right product among wide range according to several criterias: the design (monolithic or modular), the connectors (solder tab, compatible with faston connection, pins for printed circuit board or fast connector socket), the heads (circular, square or rectangular heads) and the functions (switches, pushbuttons and pilot lights).



### Contact functions

- > Pushbuttons with spring return
- > Selector switches and key switches, 2 or 3 positions
- > Mushroom head pushbuttons
- > Emergency stop pushbuttons

### Signaling functions

- > Pilot lights with LED, 'Protected LED', neon and incandescent bulbs

### Combined functions (Contact and Signaling)

- > Emergency stop pushbuttons
- > Pushbuttons with flush, spring return
- > Selector switches, 2 or 3 positions




Harmony XB6E, true color LED brightness

# Control and signaling units Ø 16 plastic

Pushbuttons, switches and pilot lights

Harmony XB6E monolithic, IP 65 and XB6 modular

Harmony XB6	Harmony XB6E
<p>Available in the form of complete units or sub-assemblies</p> 	<p>Available in the form of complete units</p> 
<p>Illuminated and non-illuminated selector switches</p> 	<p>Non-illuminated selector switches</p> 
<p>Non-illuminated mushroom head Emergency stop pushbuttons</p> 	<p>Illuminated and non-illuminated Emergency stop pushbuttons</p> 

## Optimized features of Harmony XB6E monolithic

### True-color and high LED brightness

The Harmony XB6E range of illuminated units deliver super-bright, true-color LED light in six colors: Red, Yellow, Green, Orange, White and Blue. This high level of brightness gives a clear indication regarding status of the machine.

### Emergency stop pushbuttons

The trigger action Emergency stop pushbuttons are both illuminated and non-illuminated with turn-to-release and pull-to-release mechanisms.

### Accessories for a complete solution

The Harmony XB6E range offers wide range of accessories that makes it easy to build a complete controlling solution and meet the installation needs. The accessories include five fast connector sockets, emergency labels, protective shutters, a bezel tightening tool and a blanking plug.



Global and worldwide certified offer

Product type	Pilot lights	Pushbuttons, selector switches, and pilot lights			Biometric switches	Wireless and batteryless pushbuttons	Pushbuttons, selector switches, and pilot lights	Joystick controllers	Pushbuttons, selector switches, and pilot lights	Cam switches			
													
<b>Description of range</b>	<ul style="list-style-type: none"> <li>LED pilot lights</li> </ul>	<ul style="list-style-type: none"> <li>Pushbuttons</li> <li>Multiple-headed pushbuttons</li> <li>Emergency Stop pushbuttons</li> <li>Selector switches and key switches</li> <li>Illuminated pushbuttons</li> <li>Pilot lights</li> <li>Flush mounted pushbuttons, selector switches, and pilot lights (1)</li> </ul>			<ul style="list-style-type: none"> <li>Fingerprint readers 24V <math>\overline{\text{DC}}</math></li> <li>Stand-alone biometric switches</li> <li>Stand-alone USB biometric switches</li> <li>USB biometric switches dedicated to Schneider HMI (2)</li> </ul>	<ul style="list-style-type: none"> <li>Wireless and batteryless pushbuttons and rope pull switch</li> <li>Wireless receivers</li> <li>Harmony Hub</li> </ul>	<ul style="list-style-type: none"> <li>Pushbuttons</li> <li>Emergency Stop and Emergency switching off pushbuttons</li> <li>Selector switches and key switches</li> <li>Illuminated pushbuttons</li> <li>Pilot lights</li> </ul>	<ul style="list-style-type: none"> <li>2- or 4-direction</li> <li>Stay put or spring return</li> </ul>	<ul style="list-style-type: none"> <li>Pushbuttons</li> <li>Emergency Stop pushbuttons</li> <li>Selector switches and key switches</li> <li>Illuminated pushbuttons</li> <li>Pilot lights</li> </ul>	<ul style="list-style-type: none"> <li>Switches</li> <li>Stepping switches</li> <li>Reversing and changeover switches</li> <li>Ammeter switches</li> <li>Voltmeter switches</li> <li>Reversing switches</li> <li>Star-delta and reversing star-delta switches</li> <li>Pole change switches</li> </ul>			
<b>Features</b>	<b>Products</b>	Monolithic, compact, low consumption			Monolithic	Ready-to-use packs (3) and "components" range	Monolithic	Complete units or sub-assemblies (body + head with lever)		Complete units or sub-assemblies (body + head)	Complete units or sub-assemblies (body + front panel+ head)		
	<b>Bezel</b>	Double insulated	Double insulated (4)	Metal, chromium plated, or black	Double insulated	Double insulated, dark gray	Metal, chromium plated, or double insulated, black	Double insulated, dark gray (or white for pilot lights)	Metal, chromium plated	Double insulated, black	Metal, chromium plated, or double insulated, black		
	<b>Shape of head</b>	Circular	Circular, square, or rectangular	Circular	Circular	–	Transmitter with circular head	Circular	Circular	Hexagonal	Square		
<b>Drilling or cut-out for fixing</b>		$\varnothing 8$ mm and $\varnothing 12$ mm/0.315 in. and 0.472 in.	$\varnothing 16$ mm/0.630 in.	$\varnothing 22$ mm/0.866 in. $\varnothing 30$ mm/1.181 in. (for flush mounted control and signaling units)	$\varnothing 22$ mm/0.866 in.	$\varnothing 22$ mm/0.866 in.				$\varnothing 30$ mm/1.181 in.	$\varnothing 16$ or $\varnothing 22$ mm/0.630 or 0.866 in.: series K10 $\varnothing 22$ mm/0.866 in. and multifixing: series K1/K2 4 holes, 48 or 68 centers: series K30...K150		
<b>Degree of protection</b>	Conforming to IEC 60529	IP40 IP65 with seal	IP65	IP66, IP67, IP69, and IP69K	IP65 (control button)	IP65	IP65 (control buttons and pilot lights) IP54 (Emergency switching off pushbuttons)	IP65	IP66	IP65	IP66	IP65: series K10 IP40, IP65 with seal: series K1/K2 IP40: series K30...K150	
	Conforming to UL 508 and CSA C22-2 No. 14	–	Enclosure type 4, 4X, and 13		Enclosure type 12	Enclosure type 12	Enclosure type 3 (pushbuttons and Emergency stop) and 4 (pilot lights)	Enclosure type 4, 4X and 13		Enclosure type 4 and 13 (9001K) Enclosure type 4, 4X, 13 (9001SK)		–	
<b>Cabling</b>		Tags for 2.8 x 0.5 mm/0.110 x 0.020 in. connectors or threaded connector	Faston connectors Solder pins for printed circuit boards (4) Fast connector socket (5)	Spring clamp terminal connections Screw clamp terminal connections Faston connectors Connector with adapter for printed circuit board	Cable or connectors	Wireless (transmitter) Through cable (receiver)	Screw and captive clamp terminal connections Faston clip connections (pilot lights)	Screw and captive clamp terminal connections					
<b>Mounting</b>	Panel thickness	1...8 mm/0.039...0.315 in.	1...6 mm/0.039...0.236 in.				1...6 mm/0.039...0.236 in.				0.5...6 mm/0.020...0.236 in. (depending on model)		
<b>Type references</b>		XVLA	<b>XB6, XB6E</b>	XB4	XB5	XB5S	XB5R, XB4R	XB7	XD4PA	XD2GA	XD5PA	9001K, 9001SK	K10, K1, K2, K30, K50, K63, K115, K150

(1) Flush mounted control and signaling units are available for Harmony XB4 and XB5 ranges only.  
 (2) Compatible with Harmony iPC, STU, OT, GXO, GT (except GT1000 series), GK, GH, and GTO models.  
 (3) Wireless and batteryless pushbutton and receiver ready-paired at the factory.

(4) For Harmony XB6 only.  
 (5) For Harmony XB6E only.

# Control and signaling units Ø 16 plastic

Harmony XB6E monolithic, IP 65  
Pushbuttons, switches, and pilot lights

## Presentation

The Harmony XB6E Ø 16 mm/0.630 in. range features compact products that are suitable for installation on small machines and control panels. They are well suited to applications where less space is available for mounting. This range comes with good color purity and offers the advantage of LED brightness.

- This range includes:
  - Pushbuttons, selector/key switches, Emergency stop trigger action pushbuttons for Start/Stop control of machines and installations, adjustment, and parametering (contact functions),
  - Pilot lights for visual signaling (signaling functions)
  - Illuminated pushbuttons and Emergency stop pushbuttons for control and signaling (contact functions and signaling functions)
  - Fast connector sockets with push-in technology
- This Ø 16 mm/0.630 in. monolithic range offers 3 different head shape options (circular, square, and rectangular), each available in 6 colors.
- These products are shown on the following pages in the form of complete units.
- The pushbutton and switch control offer (illuminated and non-illuminated) comprises:
  - Unmarked flush, latching, spring return pushbuttons
  - Ø 32 mm/1.260 in. Emergency stop trigger action pushbuttons
  - Selector switches with standard handle
  - Key switches
  - Various accessories
- The pilot light signaling offer includes pilot lights with integral LED.

## Installation

- Harmony XB6E products are both simple and quick to install:
  - Mounting by single installer (self-maintaining head in its cut-out)
  - Clip-together component system (head, body, contact blocks, and LED)
- Type of connection: Faston connector and fast connector socket.

## Environment

The performance features of the XB6E range meet the following specifications:

- Degree of protection:
  - IP 65 conforming to standard IEC 60529. The IP 65 standard offers complete protection against solid particles, and a good level of protection against water.
- International standards:
  - For the entire range: EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-5, UL 508, CSA C22-2 no. 14
  - For Emergency stop pushbuttons: EN/IEC 60947-5-5
- Product certifications:
  - For Emergency stop pushbuttons: UR, CCC
  - For other products: cURus, CCC

For more technical information, please visit our website [www.se.com](http://www.se.com).



# Control and signaling units Ø 16 plastic

Harmony XB6E monolithic, IP 65  
Pushbuttons, switches, and pilot lights

## Description

The Ø 16 mm/0.630 in. range of control and signaling units comprises complete double insulated units.

## Functions

### Contact functions

Pushbuttons, flush, spring return



Shape of head	Circular	Square	Rectangular
Degree of protection	IP 65	IP 65	IP 65
Color	White, orange, green, red, yellow and blue	White, orange, green, red, yellow and blue	White, orange, green, red, yellow and blue
Reference	<b>XB6EAA●●P</b>	<b>XB6ECA●●P</b>	<b>XB6EDA●●P</b>
Pages	10	10	10

### Selector switches with standard handle, 2 or 3-position



Shape of head	Circular	Square	Rectangular
Degree of protection	IP 65	IP 65	IP 65
Reference	<b>XB6EAD●●P</b>	<b>XB6ECD●●P</b>	<b>XB6EDD●●P</b>
Pages	14	14	14

### Key switches, 2 or 3-position



Shape of head	Circular	Square	Rectangular
Degree of protection	IP 65	IP 65	IP 65
Reference	<b>XB6EAG●●P</b>	<b>XB6ECG●●P</b>	<b>XB6EDG●●P</b>
Pages	14	14	14

# Control and signaling units Ø 16 plastic

Harmony XB6E monolithic, IP 65  
Pushbuttons, switches, and pilot lights

## Functions (continued)

## Contact functions (continued)

Emergency stop pushbuttons, turn to release and pull to release



Shape of head	Circular, Ø 32 mm/1.260 in.
Degree of protection	IP 65
Color	Red
Reference	<b>XB6ETN521P</b>
Page	13

## Signaling functions

Pilot lights



	Circular	Square	Rectangular
Shape of head	Circular	Square	Rectangular
Degree of protection	IP 65	IP 65	IP 65
LED	Integral LED, 12 or 24 V $\dots$ polarized	Integral LED, 12 or 24 V $\dots$ polarized	Integral LED, 12 or 24 V $\dots$ polarized
Color	White, green, red, yellow, blue and orange	White, green, red, yellow, blue and orange	White, green, red, yellow, blue and orange
Reference	<b>XB6EAV●●P</b>	<b>XB6ECV●●P</b>	<b>XB6EDV●●P</b>
Pages	11	11	11

# Control and signaling units Ø 16 plastic

Harmony XB6E monolithic, IP 65  
Pushbuttons, switches, and pilot lights

Functions (continued)

Combined functions: contact and signaling

Illuminated pushbuttons, flush, spring return



Shape of head	Circular	Square	Rectangular
Degree of protection	IP 65	IP 65	IP 65
LED	Integral LED, 12 or 24 V $\overline{\text{---}}$ polarized	Integral LED, 12 or 24 V $\overline{\text{---}}$ polarized	Integral LED, 12 or 24 V $\overline{\text{---}}$ polarized
Color	White, green, red, yellow, blue and orange	White, green, red, yellow, blue and orange	White, green, red, yellow, blue and orange
Reference	<b>XB6EAW●●P</b>	<b>XB6ECW●●P</b>	<b>XB6EDW●●P</b>
Pages	12	12	12

Illuminated pushbuttons, flush, latching



Shape of head	Circular	Square	Rectangular
Degree of protection	IP 65	IP 65	IP 65
LED	Integral LED, 12 or 24 V $\overline{\text{---}}$ polarized	Integral LED, 12 or 24 V $\overline{\text{---}}$ polarized	Integral LED, 12 or 24 V $\overline{\text{---}}$ polarized
Color	White, green, red, yellow, blue and orange	White, green, red, yellow, blue and orange	White, green, red, yellow, blue and orange
Reference	<b>XB6EAF●●P</b>	<b>XB6ECF●●P</b>	<b>XB6EDF●●P</b>
Pages	13	13	13

Illuminated Emergency stop pushbuttons, turn to release and pull to release







Shape of head	Circular, Ø 32 mm/1.260 in.
Degree of protection	IP 65
LED	Integral LED, 12 or 24 V $\overline{\text{---}}$ polarized
Color	Red
Reference	<b>XB6ETI●●●P</b>
Page	13

# Control and signaling units Ø 16 plastic

Harmony XB6E monolithic, IP 65  
Pushbuttons, switches, and pilot lights

## Pushbuttons, flush, spring return

Sold in lots of 5

Shape of head	Type of contacts	Color	Unit reference	Weight kg/lb				
<b>Circular</b> 	 <b>CO</b>							
		1	White	<a href="#">XB6EAA11P</a>	0.006/0.013			
			Black	<a href="#">XB6EAA21P</a>	0.006/0.013			
			Green	<a href="#">XB6EAA31P</a>	0.006/0.013			
			Red	<a href="#">XB6EAA41P</a>	0.006/0.013			
			Yellow	<a href="#">XB6EAA51P</a>	0.006/0.013			
			Blue	<a href="#">XB6EAA61P</a>	0.006/0.013			
		2	White	<a href="#">XB6EAA12P</a>	0.006/0.013			
			Black	<a href="#">XB6EAA22P</a>	0.006/0.013			
			Green	<a href="#">XB6EAA32P</a>	0.006/0.013			
			Red	<a href="#">XB6EAA42P</a>	0.006/0.013			
			Yellow	<a href="#">XB6EAA52P</a>	0.006/0.013			
			Blue	<a href="#">XB6EAA62P</a>	0.006/0.013			
		<b>Square</b> 						
1	White						<a href="#">XB6ECA11P</a>	0.006/0.013
	Black						<a href="#">XB6ECA21P</a>	0.006/0.013
	Green						<a href="#">XB6ECA31P</a>	0.006/0.013
	Red						<a href="#">XB6ECA41P</a>	0.006/0.013
	Yellow						<a href="#">XB6ECA51P</a>	0.006/0.013
	Blue						<a href="#">XB6ECA61P</a>	0.006/0.013
2	White						<a href="#">XB6ECA12P</a>	0.006/0.013
	Black						<a href="#">XB6ECA22P</a>	0.006/0.013
	Green						<a href="#">XB6ECA32P</a>	0.006/0.013
	Red						<a href="#">XB6ECA42P</a>	0.006/0.013
	Yellow						<a href="#">XB6ECA52P</a>	0.006/0.013
	Blue						<a href="#">XB6ECA62P</a>	0.006/0.013
<b>Rectangular</b> 								
		1	White	<a href="#">XB6EDA11P</a>	0.006/0.013			
			Black	<a href="#">XB6EDA21P</a>	0.006/0.013			
			Green	<a href="#">XB6EDA31P</a>	0.006/0.013			
			Red	<a href="#">XB6EDA41P</a>	0.006/0.013			
			Yellow	<a href="#">XB6EDA51P</a>	0.006/0.013			
			Blue	<a href="#">XB6EDA61P</a>	0.006/0.013			
		2	White	<a href="#">XB6EDA12P</a>	0.006/0.013			
			Black	<a href="#">XB6EDA22P</a>	0.006/0.013			
			Green	<a href="#">XB6EDA32P</a>	0.006/0.013			
			Red	<a href="#">XB6EDA42P</a>	0.006/0.013			
			Yellow	<a href="#">XB6EDA52P</a>	0.006/0.013			
			Blue	<a href="#">XB6EDA62P</a>	0.006/0.013			



XB6EAA31P



XB6ECA51P



XB6EDA61P



# Control and signaling units Ø 16 plastic

Harmony XB6E monolithic, IP 65  
Pushbuttons, switches, and pilot lights



XB6EAV8JP






XB6ECV6JP



XB6EDV1JP

## Pilots lights with 12 or 24 V $\ddot{}$ polarized integral LED

Sold in lots of 5





Shape of head	Color	Unit reference		Weight kg/lb
		With 12 V $\ddot{}$ LED	With 24 V $\ddot{}$ LED	
<b>Circular</b> 	White	<a href="#">XB6EAV1JP</a>	<a href="#">XB6EAV1BP</a>	0.006/0.013
	Green	<a href="#">XB6EAV3JP</a>	<a href="#">XB6EAV3BP</a>	0.006/0.013
	Red	<a href="#">XB6EAV4JP</a>	<a href="#">XB6EAV4BP</a>	0.006/0.013
	Yellow	<a href="#">XB6EAV5JP</a>	<a href="#">XB6EAV5BP</a>	0.006/0.013
	Blue	<a href="#">XB6EAV6JP</a>	<a href="#">XB6EAV6BP</a>	0.006/0.013
	Orange	<a href="#">XB6EAV8JP</a>	<a href="#">XB6EAV8BP</a>	0.006/0.013
<b>Square</b> 	White	<a href="#">XB6ECV1JP</a>	<a href="#">XB6ECV1BP</a>	0.006/0.013
	Green	<a href="#">XB6ECV3JP</a>	<a href="#">XB6ECV3BP</a>	0.006/0.013
	Red	<a href="#">XB6ECV4JP</a>	<a href="#">XB6ECV4BP</a>	0.006/0.013
	Yellow	<a href="#">XB6ECV5JP</a>	<a href="#">XB6ECV5BP</a>	0.006/0.013
	Blue	<a href="#">XB6ECV6JP</a>	<a href="#">XB6ECV6BP</a>	0.006/0.013
	Orange	<a href="#">XB6ECV8JP</a>	<a href="#">XB6ECV8BP</a>	0.006/0.013
<b>Rectangular</b> 	White	<a href="#">XB6EDV1JP</a>	<a href="#">XB6EDV1BP</a>	0.006/0.013
	Green	<a href="#">XB6EDV3JP</a>	<a href="#">XB6EDV3BP</a>	0.006/0.013
	Red	<a href="#">XB6EDV4JP</a>	<a href="#">XB6EDV4BP</a>	0.006/0.013
	Yellow	<a href="#">XB6EDV5JP</a>	<a href="#">XB6EDV5BP</a>	0.006/0.013
	Blue	<a href="#">XB6EDV6JP</a>	<a href="#">XB6EDV6BP</a>	0.006/0.013
	Orange	<a href="#">XB6EDV8JP</a>	<a href="#">XB6EDV8BP</a>	0.006/0.013

# Control and signaling units Ø 16 plastic

Harmony XB6E monolithic, IP 65  
Pushbuttons, switches, and pilot lights

## Illuminated pushbuttons, flush, spring return, with 12 or 24 V $\bar{\square}$ polarized integral LED

Sold in lots of 5

Shape of head	Type of contacts  CO	Color	Unit reference		Weight kg/lb
			With 12 V $\bar{\square}$ LED	With 24 V $\bar{\square}$ LED	
Circular 	1	White	<a href="#">XB6EAW1J1P</a>	<a href="#">XB6EAW1B1P</a>	0.006/0.013
		Green	<a href="#">XB6EAW3J1P</a>	<a href="#">XB6EAW3B1P</a>	0.006/0.013
		Red	<a href="#">XB6EAW4J1P</a>	<a href="#">XB6EAW4B1P</a>	0.006/0.013
		Yellow	<a href="#">XB6EAW5J1P</a>	<a href="#">XB6EAW5B1P</a>	0.006/0.013
		Blue	<a href="#">XB6EAW6J1P</a>	<a href="#">XB6EAW6B1P</a>	0.006/0.013
		Orange	<a href="#">XB6EAW8J1P</a>	<a href="#">XB6EAW8B1P</a>	0.006/0.013
	2	White	<a href="#">XB6EAW1J2P</a>	<a href="#">XB6EAW1B2P</a>	0.006/0.013
		Green	<a href="#">XB6EAW3J2P</a>	<a href="#">XB6EAW3B2P</a>	0.006/0.013
		Red	<a href="#">XB6EAW4J2P</a>	<a href="#">XB6EAW4B2P</a>	0.006/0.013
		Yellow	<a href="#">XB6EAW5J2P</a>	<a href="#">XB6EAW5B2P</a>	0.006/0.013
		Blue	<a href="#">XB6EAW6J2P</a>	<a href="#">XB6EAW6B2P</a>	0.006/0.013
		Orange	<a href="#">XB6EAW8J2P</a>	<a href="#">XB6EAW8B2P</a>	0.006/0.013
Square 	1	White	<a href="#">XB6ECW1J1P</a>	<a href="#">XB6ECW1B1P</a>	0.006/0.013
		Green	<a href="#">XB6ECW3J1P</a>	<a href="#">XB6ECW3B1P</a>	0.006/0.013
		Red	<a href="#">XB6ECW4J1P</a>	<a href="#">XB6ECW4B1P</a>	0.006/0.013
		Yellow	<a href="#">XB6ECW5J1P</a>	<a href="#">XB6ECW5B1P</a>	0.006/0.013
		Blue	<a href="#">XB6ECW6J1P</a>	<a href="#">XB6ECW6B1P</a>	0.006/0.013
		Orange	<a href="#">XB6ECW8J1P</a>	<a href="#">XB6ECW8B1P</a>	0.006/0.013
	2	White	<a href="#">XB6ECW1J2P</a>	<a href="#">XB6ECW1B2P</a>	0.006/0.013
		Green	<a href="#">XB6ECW3J2P</a>	<a href="#">XB6ECW3B2P</a>	0.006/0.013
		Red	<a href="#">XB6ECW4J2P</a>	<a href="#">XB6ECW4B2P</a>	0.006/0.013
		Yellow	<a href="#">XB6ECW5J2P</a>	<a href="#">XB6ECW5B2P</a>	0.006/0.013
		Blue	<a href="#">XB6ECW6J2P</a>	<a href="#">XB6ECW6B2P</a>	0.006/0.013
		Orange	<a href="#">XB6ECW8J2P</a>	<a href="#">XB6ECW8B2P</a>	0.006/0.013
Rectangular 	1	White	<a href="#">XB6EDW1J1P</a>	<a href="#">XB6EDW1B1P</a>	0.006/0.013
		Green	<a href="#">XB6EDW3J1P</a>	<a href="#">XB6EDW3B1P</a>	0.006/0.013
		Red	<a href="#">XB6EDW4J1P</a>	<a href="#">XB6EDW4B1P</a>	0.006/0.013
		Yellow	<a href="#">XB6EDW5J1P</a>	<a href="#">XB6EDW5B1P</a>	0.006/0.013
		Blue	<a href="#">XB6EDW6J1P</a>	<a href="#">XB6EDW6B1P</a>	0.006/0.013
		Orange	<a href="#">XB6EDW8J1P</a>	<a href="#">XB6EDW8B1P</a>	0.006/0.013
	2	White	<a href="#">XB6EDW1J2P</a>	<a href="#">XB6EDW1B2P</a>	0.006/0.013
		Green	<a href="#">XB6EDW3J2P</a>	<a href="#">XB6EDW3B2P</a>	0.006/0.013
		Red	<a href="#">XB6EDW4J2P</a>	<a href="#">XB6EDW4B2P</a>	0.006/0.013
		Yellow	<a href="#">XB6EDW5J2P</a>	<a href="#">XB6EDW5B2P</a>	0.006/0.013
		Blue	<a href="#">XB6EDW6J2P</a>	<a href="#">XB6EDW6B2P</a>	0.006/0.013
		Orange	<a href="#">XB6EDW8J2P</a>	<a href="#">XB6EDW8B2P</a>	0.006/0.013



XB6EAW8J1P



XB6ECW5J1P



XB6EDW3J1P

# Control and signaling units Ø 16 plastic

Harmony XB6E monolithic, IP 65  
Pushbuttons, switches, and pilot lights



XB6EAF1J1P



XB6ECF4J1P



XB6EDF5J1P



XB6ETI522P



XB6ETN521P

## Illuminated pushbuttons, flush, latching, with 12 or 24 V $\overline{\text{---}}$ polarized integral LED

Sold in lots of 5

Shape of head	Type of contacts	Color	Unit reference		Weight kg/lb	
			With 12 V $\overline{\text{---}}$ LED	With 24 V $\overline{\text{---}}$ LED		
Circular 	 CO 1	White	<a href="#">XB6EAF1J1P</a>	<a href="#">XB6EAF1B1P</a>	0.006/0.013	
		Green	<a href="#">XB6EAF3J1P</a>	<a href="#">XB6EAF3B1P</a>	0.006/0.013	
		Red	<a href="#">XB6EAF4J1P</a>	<a href="#">XB6EAF4B1P</a>	0.006/0.013	
		Yellow	<a href="#">XB6EAF5J1P</a>	<a href="#">XB6EAF5B1P</a>	0.006/0.013	
		Blue	<a href="#">XB6EAF6J1P</a>	<a href="#">XB6EAF6B1P</a>	0.006/0.013	
		Orange	<a href="#">XB6EAF8J1P</a>	<a href="#">XB6EAF8B1P</a>	0.006/0.013	
	2	White	<a href="#">XB6EAF1J2P</a>	<a href="#">XB6EAF1B2P</a>	0.006/0.013	
		Green	<a href="#">XB6EAF3J2P</a>	<a href="#">XB6EAF3B2P</a>	0.006/0.013	
		Red	<a href="#">XB6EAF4J2P</a>	<a href="#">XB6EAF4B2P</a>	0.006/0.013	
		Yellow	<a href="#">XB6EAF5J2P</a>	<a href="#">XB6EAF5B2P</a>	0.006/0.013	
		Blue	<a href="#">XB6EAF6J2P</a>	<a href="#">XB6EAF6B2P</a>	0.006/0.013	
		Orange	<a href="#">XB6EAF8J2P</a>	<a href="#">XB6EAF8B2P</a>	0.006/0.013	
	Square 	1	White	<a href="#">XB6ECF1J1P</a>	<a href="#">XB6ECF1B1P</a>	0.006/0.013
			Green	<a href="#">XB6ECF3J1P</a>	<a href="#">XB6ECF3B1P</a>	0.006/0.013
			Red	<a href="#">XB6ECF4J1P</a>	<a href="#">XB6ECF4B1P</a>	0.006/0.013
			Yellow	<a href="#">XB6ECF5J1P</a>	<a href="#">XB6ECF5B1P</a>	0.006/0.013
			Blue	<a href="#">XB6ECF6J1P</a>	<a href="#">XB6ECF6B1P</a>	0.006/0.013
			Orange	<a href="#">XB6ECF8J1P</a>	<a href="#">XB6ECF8B1P</a>	0.006/0.013
2		White	<a href="#">XB6ECF1J2P</a>	<a href="#">XB6ECF1B2P</a>	0.006/0.013	
		Green	<a href="#">XB6ECF3J2P</a>	<a href="#">XB6ECF3B2P</a>	0.006/0.013	
		Red	<a href="#">XB6ECF4J2P</a>	<a href="#">XB6ECF4B2P</a>	0.006/0.013	
		Yellow	<a href="#">XB6ECF5J2P</a>	<a href="#">XB6ECF5B2P</a>	0.006/0.013	
		Blue	<a href="#">XB6ECF6J2P</a>	<a href="#">XB6ECF6B2P</a>	0.006/0.013	
		Orange	<a href="#">XB6ECF8J2P</a>	<a href="#">XB6ECF8B2P</a>	0.006/0.013	
Rectangular 		1	White	<a href="#">XB6EDF1J1P</a>	<a href="#">XB6EDF1B1P</a>	0.006/0.013
			Green	<a href="#">XB6EDF3J1P</a>	<a href="#">XB6EDF3B1P</a>	0.006/0.013
			Red	<a href="#">XB6EDF4J1P</a>	<a href="#">XB6EDF4B1P</a>	0.006/0.013
			Yellow	<a href="#">XB6EDF5J1P</a>	<a href="#">XB6EDF5B1P</a>	0.006/0.013
			Blue	<a href="#">XB6EDF6J1P</a>	<a href="#">XB6EDF6B1P</a>	0.006/0.013
			Orange	<a href="#">XB6EDF8J1P</a>	<a href="#">XB6EDF8B1P</a>	0.006/0.013
	2	White	<a href="#">XB6EDF1J2P</a>	<a href="#">XB6EDF1B2P</a>	0.006/0.013	
		Green	<a href="#">XB6EDF3J2P</a>	<a href="#">XB6EDF3B2P</a>	0.006/0.013	
		Red	<a href="#">XB6EDF4J2P</a>	<a href="#">XB6EDF4B2P</a>	0.006/0.013	
		Yellow	<a href="#">XB6EDF5J2P</a>	<a href="#">XB6EDF5B2P</a>	0.006/0.013	
		Blue	<a href="#">XB6EDF6J2P</a>	<a href="#">XB6EDF6B2P</a>	0.006/0.013	
		Orange	<a href="#">XB6EDF8J2P</a>	<a href="#">XB6EDF8B2P</a>	0.006/0.013	

## Emergency stop mushroom head pushbutton

### Illuminated

Shape of head	Type of push	Type of contacts	Unit reference		Weight kg/lb
			With 12 V $\overline{\text{---}}$ LED	With 24 V $\overline{\text{---}}$ LED	
Circular, Ø 32 mm/ 1.260 in.	Trigger action, turn to release, pull to release	 NC 2	<a href="#">XB6ETI522P</a>	<a href="#">XB6ETI523P</a>	0.027/0.060

### Non-illuminated

Shape of head	Type of push	Type of contacts	Unit reference	Weight kg/lb

# Control and signaling units Ø 16 plastic

Harmony XB6E monolithic, IP 65  
Pushbuttons, switches, and pilot lights

## Selector switches with standard handle or key switches

Sold in lots of 5



XB6EAD221P



XB6EAG221P



XB6ECD221P






























XB6ECG221P



XB6EDD221P



XB6EDG221P

Shape of head	Type of push	Type of contacts	Number and type of positions	Unit reference	Weight kg/lb		
Circular	Standard black handle 	 CO	1	2 - stay put 	<a href="#">XB6EAD221P</a>	0.010/0.022	
			2	2 - stay put 	<a href="#">XB6EAD222P</a>	0.010/0.022	
			2	3 - stay put 	<a href="#">XB6EAD232P</a>	0.010/0.022	
	Key (1) 	1	2 - stay put 	<a href="#">XB6EAG221P</a>	0.020/0.044		
		2	2 - stay put 	<a href="#">XB6EAG222P</a>	0.020/0.044		
		2	3 - stay put 	<a href="#">XB6EAG232P</a>	0.020/0.044		
	Square	Standard black handle 	 CO	1	2 - stay put 	<a href="#">XB6ECD221P</a>	0.010/0.022
				2	2 - stay put 	<a href="#">XB6ECD222P</a>	0.010/0.022
				2	3 - stay put 	<a href="#">XB6ECD232P</a>	0.010/0.022
Key (1) 		1	2 - stay put 	<a href="#">XB6ECG221P</a>	0.020/0.044		
		2	2 - stay put 	<a href="#">XB6ECG222P</a>	0.020/0.044		
		2	3 - stay put 	<a href="#">XB6ECG232P</a>	0.020/0.044		
Rectangular		Standard black handle 	 CO	1	2 - stay put 	<a href="#">XB6EDD221P</a>	0.010/0.022
				2	2 - stay put 	<a href="#">XB6EDD222P</a>	0.010/0.022
				2	3 - stay put 	<a href="#">XB6EDD232P</a>	0.010/0.022
	Key (1) 	1	2 - stay put 	<a href="#">XB6EDG221P</a>	0.020/0.044		
		2	2 - stay put 	<a href="#">XB6EDG222P</a>	0.020/0.044		
		2	3 - stay put 	<a href="#">XB6EDG232P</a>	0.020/0.044		

(1) Key no. 132, withdrawal from all positions. 2 keys supplied with product.



# Control and signaling units Ø 16 plastic


Harmony XB6E monolithic, IP 65  
Pushbuttons, switches, and pilot lights




ZB6YF01



XB6E... + ZB6YF...



ZB6YD001




ZB6YA001



ZB6Y005

## Accessories

### Fast connector socket

For use with	Type of contacts	Sold in lots of	Unit reference	Weight kg/lb
	 CO			
Illuminated pushbutton	1	10	ZB6YF01	0.067/0.148
	2	10	ZB6YF02	0.078/0.172
Pilot lights	-	10	ZB6YF03	0.056/0.123
Pushbutton and selector switches	1	10	ZB6YF04	0.058/0.128
	2	10	ZB6YF05	0.069/0.152

### For pushbuttons

Description	For	Sold in lots of	Unit reference	Weight kg/lb
Bezel tightening tool + bulb extractor	Tightening and slackening the bezel and changing bulbs	2	ZB6Y905	0.006/0.013
Protective shutters	Circular or square pushbuttons	1	ZB6YA001	0.003/0.007
	Rectangular pushbuttons	1	ZB6YD001	0.003/0.007
Blanking plug	-	10	ZB6Y005	0.001/0.002

### Labels for Emergency stop mushroom head pushbutton

Shape	Color	Marking	Sold in lots of	Unit reference	Weight kg/lb
Circular	Yellow	EMERGENCY STOP	10	ZB6Y56	0.010/0.022

# Control and signaling units Ø 16 plastic

## Harmony XB6 modular

### Pushbuttons, switches and pilot lights

#### Presentation

The Harmony XB6 Ø 16/0.630 in. range of plastic control and signaling units are compact and well suited to applications where less space is available for mounting pushbuttons, switches and pilot lights. It easily proves its use in industry, buildings and the tertiary sector (small equipment, small machines and control panels).

■ This range includes:

- Pushbuttons, selector/key switches, emergency stop pushbuttons for Start/Stop control of machines and installations, adjustment and parametering (contact functions),
- Pilot lights for visual signaling (signaling functions),
- Illuminated pushbuttons for control and signaling (contact and signaling functions).

■ The Ø 16/0.630 in. modular range offers the advantage of having 3 shapes of head (circular, square and rectangular), each available in 6 colors.

■ The pushbutton and switch control offer (illuminated and non-illuminated) comprises:

- Flush, projecting, spring return or latching, marked or unmarked pushbuttons,
- Ø 30/1.181 in. mushroom head emergency stop trigger action and mechanically latching pushbuttons (conforming to standards EN/IEC 60204-1 and EN/ISO 13850),
- Selector switches with standard handle,
- Key switches,
- A wide choice of legends, legend holders and marked pushbutton caps,
- Various accessories.

■ The pilot light signaling offer includes:

- Pilot lights with integral LED,
- Pilot lights for bulbs.

#### Installation

■ Harmony XB6 products are both simple and quick to install:

- Mounting by single installer (self-maintaining of the head in its cut-out),
- Clip-together component system (head, body, contact blocks and LED).

■ 2 types of connection:

- Faston connector,
- Pins for printed circuit board.

#### Environment

The performance features of Harmony XB6 range meet the following specifications:

■ Degrees of protection:

- IP 65 conforming to standard IEC 60529,
- NEMA type 4, 4X and 13 conforming to standard UL 50 and CSA C22-2 no. 94 (except key switches).

■ International standards:

- For the entire range: EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-5, UL 508, CSA C22-2 no. 14, JIS C 4520 and 852.
- For Emergency stop pushbuttons: EN/IEC 60204-1 and EN/ISO 13850.

■ Product certifications: UL, CSA, CCC, GOST.

For more technical information, please refer to our website [www.se.com](http://www.se.com).


# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Pushbuttons, switches and pilot lights


## Description

The Ø 16 range of plastic (double insulated) control and signaling units comprises:


**Complete units, XB6 pushbuttons, switches and pilot lights**



XB6D with rectangular head




XB6C with square head



XB6A with circular head



**Sub-assemblies, ZB6 pushbuttons, switches and pilot lights  
Body + head sub-assemblies**



ZB6D with rectangular head



ZB6C with square head



ZB6A with circular head

## Component parts and accessories, ZB


Any of the pushbuttons, switches or pilot lights in the range may be adapted by replacing certain component parts, such as:

### For heads

- Caps or lenses
- Legends
  - Pre-printed legends
  - Special legends produced using labelling software
- Link enabling operation of the 3<sup>rd</sup> contact (cannot be fitted on illuminated pushbuttons)

### For bodies

- LED, incandescent and neon bulbs
- NC or NO contact blocks, 3 contacts max. per block, with Faston connector or for printed circuit board
- Silver or gold flashed NC or NO contact blocks

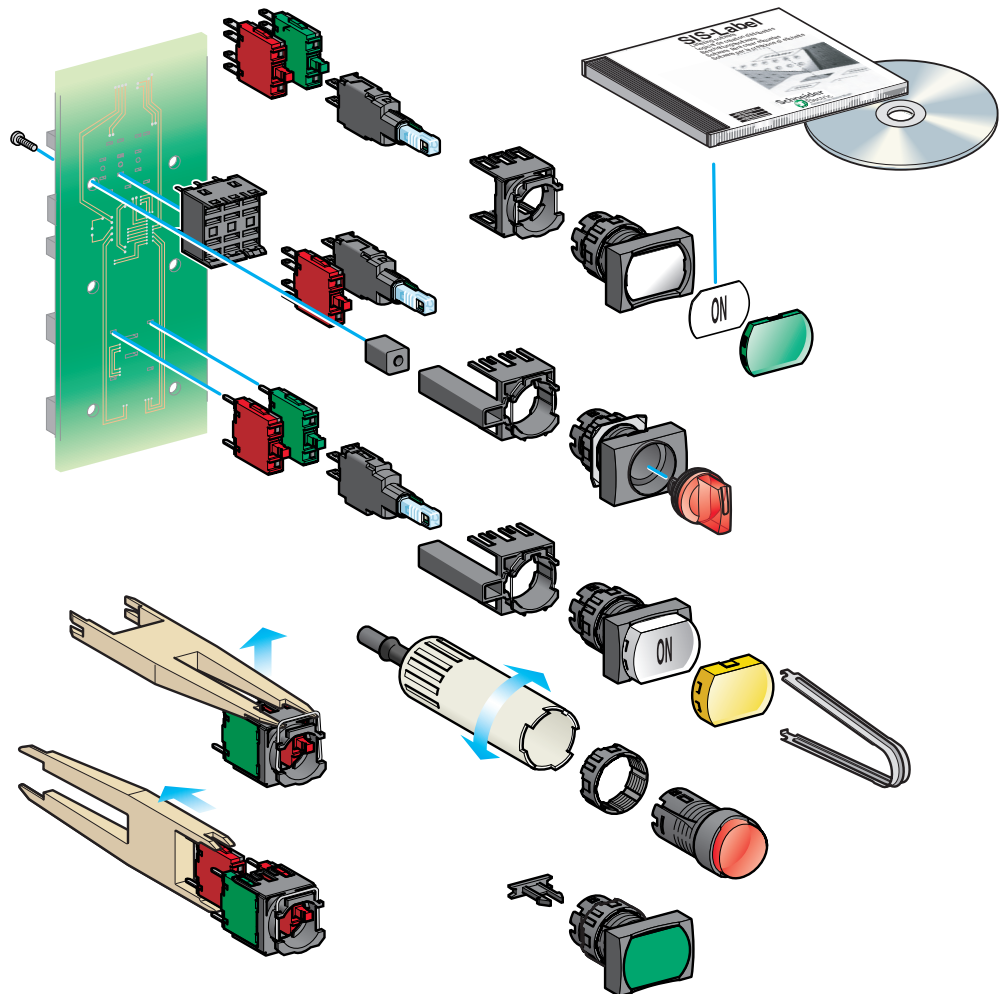

# Control and signaling units Ø 16 plastic


Harmony XB6 modular  
Pushbuttons, switches and pilot lights

## Complete units


## Combined functions (contact and signaling)

### Illuminated pushbuttons

#### Illuminated pushbuttons with rectangular, square or circular head

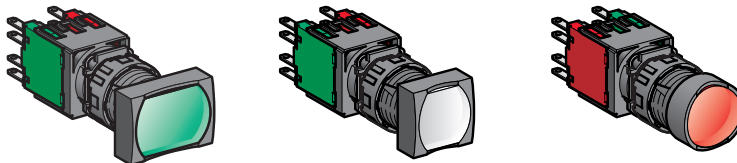

#### Head colors



Protected LED

#### Flush push with integral LED, spring return

XB6DW●●●●●  
see [page 22](#)

XB6CW●●●●●  
see [page 22](#)

XB6AW●●●●●  
see [page 22](#)



Protected LED

#### Flush push with integral LED, latching

XB6DF●●●●●  
see [page 24](#)

XB6CF●●●●●  
see [page 24](#)

XB6AF●●●●●  
see [page 24](#)

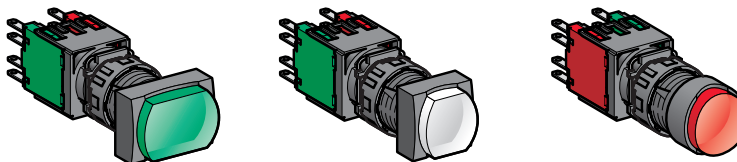

Protected LED

#### Projecting push with integral LED, spring return

XB6DE●●●●●  
see [page 22](#)


XB6CE●●●●●  
see [page 22](#)

XB6AE●●●●●  
see [page 22](#)


## Signaling functions

### Pilot lights

#### Pilot lights with rectangular, square or circular head

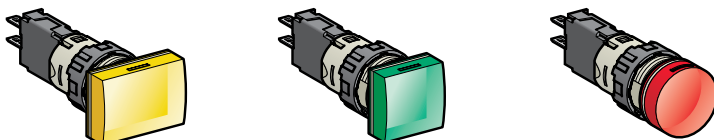

#### Head colors



Protected LED

#### With integral LED


XB6DV●●●●●  
see [page 25](#)

XB6CV●●●●●  
see [page 25](#)


XB6AV●●●●●  
see [page 25](#)

### Illuminated selector switches

#### Illuminated selector switches with rectangular, square or circular head

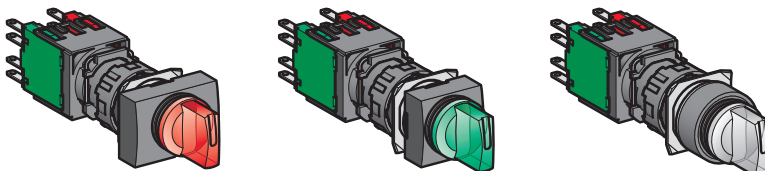

#### Head colors



#### With integral LED

XB6DK●●●●●  
see [page 31](#)

XB6CK●●●●●  
see [page 31](#)

XB6AK●●●●●  
see [page 31](#)



# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Pushbuttons, switches and pilot lights

## Complete units



(continued)

## Contact functions

Pushbuttons,  
spring return

Pushbuttons with rectangular, square or circular head

Head colors

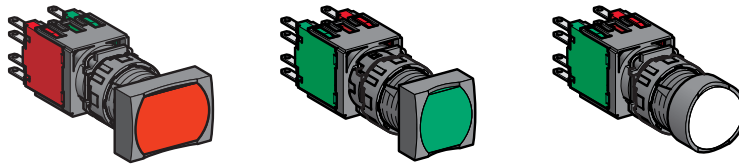


Flush

XB6DA●●●●  
see [page 26](#)

XB6CA●●●●  
see [page 26](#)

XB6AA●●●●  
see [page 26](#)

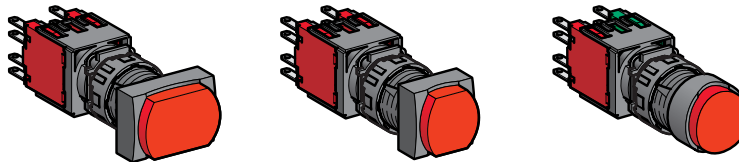


Projecting

XB6DL42B  
see [page 26](#)

XB6CL42B  
see [page 26](#)

XB6AL42B  
see [page 26](#)

Ø 30 mm/1.181 in.  
mushroom head  
Emergency stop trigger  
action and mechanically  
latching pushbuttons

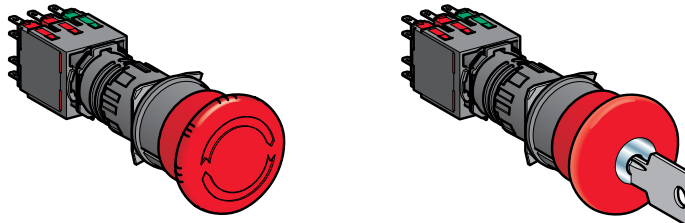


Turn to release  
(EN/ISO 13850)

XB6AS8349B  
see [page 28](#)

Key release  
(EN/ISO 13850)

XB6AS9349B  
see [page 28](#)

Selector switches and  
key switches

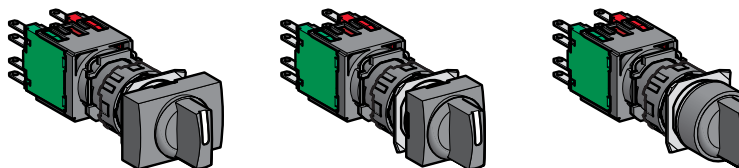


Selector switches, standard handle

XB6DD●●●●  
see [page 29](#)

XB6CD●●●●  
see [page 29](#)

XB6AD●●●●  
see [page 29](#)

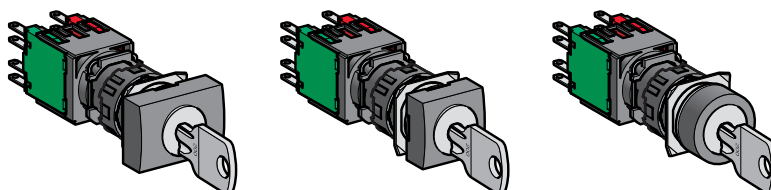

Key switches

XB6DG●●●●  
see [page 33](#)

XB6CG●●●●  
see [page 33](#)

XB6AG●●●●  
see [page 33](#)

# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Pushbuttons, switches and pilot lights

## Illuminated units for user assembly


## Combined functions (contact and signaling)

For illuminated pushbuttons and selector switches




Body sub-assemblies

With integral LED




Faston  
ZB6ZB●●B  
see page 36

Direct supply, for incandescent bulb




Faston  
ZB6ZH●●B  
see page 36

Head sub-assemblies, rectangular, square or circular


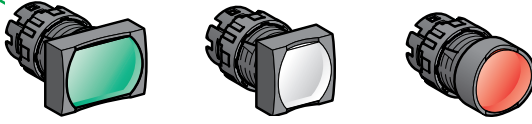


Head colors





Flush push, spring return  
ZB6DW● see page 23    ZB6CW● see page 23    ZB6AW● see page 23

Flush push, latching  
ZB6DF●●B see page 24    ZB6CF●●B see page 24    ZB6AF●●B see page 24

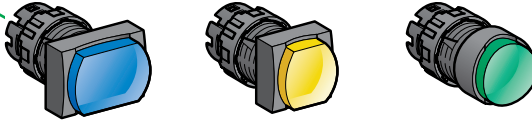

Projecting push, spring return  
ZB6DE● see page 23    ZB6CE● see page 23    ZB6AE● see page 23

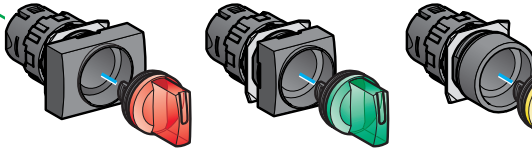

Selector switch heads, without handle  
ZB6DD● see page 32    ZB6CD● see page 32    ZB6AD● see page 32


## Signaling functions

For pilot lights




Body sub-assemblies

With integral LED




Faston  
ZB6EB●B  
see page 37

Direct supply for incandescent bulb or with resistor




Faston  
ZB6E●0B  
see page 37

Head sub-assemblies, rectangular, square or circular

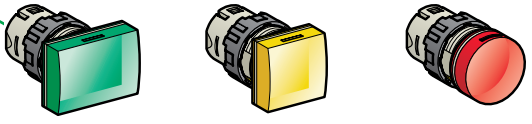

Head colors


















ZB6DV● see page 25    ZB6CV● see page 25    ZB6AV● see page 25

# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Pushbuttons, switches and pilot lights

## Non illuminated units for user assembly

## Contact functions

	Body sub-assemblies	Head sub-assemblies, rectangular, square or circular			Head colors
For pushbuttons	Direct supply, for incandescent bulb 				
	Faston ZB6ZB●B see <a href="#">page 36</a>	Flush push, spring return ZB6DA● see <a href="#">page 27</a> ZB6CA● see <a href="#">page 27</a> ZB6AA● see <a href="#">page 27</a>			
For mushroom head and Emergency stop pushbuttons					
		Ø 24 mm/0.945 in. , spring return ZB6AC● see <a href="#">page 28</a>	Ø 30 mm/1.181 in. , trigger action and mechanically latching (EN/ISO 13850) Turn to release ZB6AS834 see <a href="#">page 28</a>	Key release ZB6AS934 see <a href="#">page 28</a>	
For selector switches and key switches					
		Selector switch heads, standard handle ZB6DD●● see <a href="#">page 30</a> ZB6CD●● see <a href="#">page 30</a> ZB6AD●● see <a href="#">page 30</a>			
		Key switch heads ZB6DG●● see <a href="#">page 33</a> ZB6CG●● see <a href="#">page 34</a> ZB6AG●● see <a href="#">page 35</a>			

## References

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Illuminated pushbuttons, spring return, with integral LED



XB6DW3B1B



XB6CW4B2B



XB6AW3B1B



XB6DE1B5B



XB6CE4B2B



XB6AE3B1B

Illuminated pushbuttons, spring return with 12...24 V integral LED							
Shape of head	Type of push	Type of contacts		Color of push	Reference	Weight kg/lb	
		NO	NC				
<b>Complete units</b>							
Rectangular	Flush	1	-	White	<b>XB6DW1B1B</b> (ZB6ZB11B + ZB6DW1)	0.022/0.049	
				Green	<b>XB6DW3B1B</b> (ZB6ZB31B + ZB6DW3)	0.022/0.049	
		-	1	Red	<b>XB6DW4B2B</b> (ZB6ZB42B + ZB6DW4)	0.022/0.049	
		1	1	White	<b>XB6DW1B5B</b> (ZB6ZB15B + ZB6DW1)	0.025/0.055	
				Green	<b>XB6DW3B5B</b> (ZB6ZB35B + ZB6DW3)	0.025/0.055	
				Red	<b>XB6DW4B5B</b> (ZB6ZB45B + ZB6DW4)	0.025/0.055	
	Square	Flush	1	-	White	<b>XB6CW1B1B</b> (ZB6ZB11B + ZB6CW1)	0.022/0.049
					Green	<b>XB6CW3B1B</b> (ZB6ZB31B + ZB6CW3)	0.022/0.049
			-	1	Red	<b>XB6CW4B2B</b> (ZB6ZB42B + ZB6CW4)	0.022/0.049
			1	1	White	<b>XB6CW1B5B</b> (ZB6ZB15B + ZB6CW1)	0.025/0.055
					Green	<b>XB6CW3B5B</b> (ZB6ZB35B + ZB6CW3)	0.025/0.055
					Red	<b>XB6CW4B5B</b> (ZB6ZB45B + ZB6CW4)	0.025/0.055
Circular	Flush	1	-	White	<b>XB6AW1B1B</b> (ZB6ZB11B + ZB6AW1)	0.022/0.049	
				Green	<b>XB6AW3B1B</b> (ZB6ZB31B + ZB6AW3)	0.022/0.049	
		-	1	Red	<b>XB6AW4B2B</b> (ZB6ZB42B + ZB6AW4)	0.022/0.049	
		1	1	White	<b>XB6AW1B5B</b> (ZB6ZB15B + ZB6AW1)	0.025/0.055	
				Green	<b>XB6AW3B5B</b> (ZB6ZB35B + ZB6AW3)	0.025/0.055	
				Red	<b>XB6AW4B5B</b> (ZB6ZB45B + ZB6AW4)	0.025/0.055	
	Rectangular	Projecting	1	-	Green	<b>XB6DE3B1B</b> (ZB6ZB31B + ZB6DE3)	0.022/0.049
					Red	<b>XB6DE4B2B</b> (ZB6ZB42B + ZB6DE4)	0.022/0.049
			1	1	White	<b>XB6DE1B5B</b> (ZB6ZB15B + ZB6DE1)	0.025/0.055
					Green	<b>XB6DE3B5B</b> (ZB6ZB35B + ZB6DE3)	0.025/0.055
					Red	<b>XB6DE4B5B</b> (ZB6ZB45B + ZB6DE4)	0.025/0.055
			Square	Projecting	1	-	Green
Red	<b>XB6CE4B2B</b> (ZB6ZB42B + ZB6CE4)	0.022/0.049					
1	1	White			<b>XB6CE1B5B</b> (ZB6ZB15B + ZB6CE1)	0.025/0.055	
		Green			<b>XB6CE3B5B</b> (ZB6ZB35B + ZB6CE3)	0.025/0.055	
		Red			<b>XB6CE4B5B</b> (ZB6ZB45B + ZB6CE4)	0.025/0.055	
Circular	Projecting	1			-	Green	<b>XB6AE3B1B</b> (ZB6ZB31B + ZB6AE3)
			Red	<b>XB6AE4B2B</b> (ZB6ZB42B + ZB6AE4)		0.022/0.049	
		1	1	White	<b>XB6AE1B5B</b> (ZB6ZB15B + ZB6AE1)	0.025/0.055	
				Green	<b>XB6AE3B5B</b> (ZB6ZB35B + ZB6AE3)	0.025/0.055	
				Red	<b>XB6AE4B5B</b> (ZB6ZB45B + ZB6AE4)	0.025/0.055	

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Illuminated pushbuttons, spring return, with integral LED



ZB6DW1



ZB6CW6



ZB6AW5



ZB6DE8









ZB6CE1



ZB6AE5

## Illuminated pushbuttons, spring return with 12...24 V integral LED (continued)

Shape of head	Type of push	Color of push	Reference	Weight kg/lb
<b>Heads only</b>				
<b>Rectangular</b> 	<b>Flush</b>	White	ZB6DW1	0.016/0.035
		Green	ZB6DW3	0.016/0.035
		Red	ZB6DW4	0.016/0.035
		Yellow	ZB6DW5	0.016/0.035
		Blue	ZB6DW6	0.016/0.035
		Orange	ZB6DW8	0.016/0.035
		6 colors (1)	ZB6DW9	0.016/0.035
		Without cap (2)	ZB6DW0	0.016/0.035
		<b>Square</b> 	<b>Flush</b>	White
Green	ZB6CW3			0.016/0.035
Red	ZB6CW4			0.016/0.035
Yellow	ZB6CW5			0.016/0.035
Blue	ZB6CW6			0.016/0.035
Orange	ZB6CW8			0.016/0.035
6 colors (1)	ZB6CW9			0.016/0.035
Without cap (2)	ZB6CW0			0.016/0.035
<b>Circular</b> 	<b>Flush</b>			White
		Green	ZB6AW3	0.016/0.035
		Red	ZB6AW4	0.016/0.035
		Yellow	ZB6AW5	0.016/0.035
		Blue	ZB6AW6	0.016/0.035
		Orange	ZB6AW8	0.016/0.035
		6 colors (1)	ZB6AW9	0.016/0.035
		Without cap (2)	ZB6AW0	0.016/0.035
		<b>Rectangular</b> 	<b>Projecting</b>	White
Green	ZB6DE3			0.016/0.035
Red	ZB6DE4			0.016/0.035
Yellow	ZB6DE5			0.016/0.035
Blue	ZB6DE6			0.016/0.035
Orange	ZB6DE8			0.016/0.035
6 colors (1)	ZB6DE9			0.016/0.035
Without cap (2)	ZB6DW0			0.016/0.035
<b>Square</b> 	<b>Projecting</b>			White
		Green	ZB6CE3	0.016/0.035
		Red	ZB6CE4	0.016/0.035
		Yellow	ZB6CE5	0.016/0.035
		Blue	ZB6CE6	0.016/0.035
		Orange	ZB6CE8	0.016/0.035
		6 colors (1)	ZB6CE9	0.016/0.035
		Without cap (2)	ZB6CW0	0.016/0.035
		<b>Circular</b> 	<b>Projecting</b>	White
Green	ZB6AE3			0.016/0.035
Red	ZB6AE4			0.016/0.035
Yellow	ZB6AE5			0.016/0.035
Blue	ZB6AE6			0.016/0.035
Orange	ZB6AE8			0.016/0.035
6 colors (1)	ZB6AE9			0.016/0.035
Without cap (2)	ZB6AW0			0.016/0.035

(1) Separate 6 different colored caps (White, Green, Red, Yellow, Blue and Orange) included with head.

(2) To order caps separately, see page 38.

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Illuminated pushbuttons, latching, with integral LED



XB6DF4B5B



XB6CF1B5B



XB6AF4B2B



ZB6DF6



ZB6CF5



ZB6AF3

Illuminated pushbuttons, latching with 12...24 V integral LED						
Shape of head	Type of push	Type of contacts		Color of push	Reference	Weight kg/lb
		NO	NC			

Complete units							
Rectangular	Flush		1	–	Green	<b>XB6DF3B1B</b> (ZB6ZB31B + ZB6DF3)	0.022/0.049
			–	1	Red	<b>XB6DF4B2B</b> (ZB6ZB42B + ZB6DF4)	0.022/0.049
			1	1	White	<b>XB6DF1B5B</b> (ZB6ZB15B + ZB6DF1)	0.025/0.055
					Green	<b>XB6DF3B5B</b> (ZB6ZB35B + ZB6DF3)	0.025/0.055
				Red	<b>XB6DF4B5B</b> (ZB6ZB45B + ZB6DF4)	0.025/0.055	
Square	Flush		1	–	Green	<b>XB6CF3B1B</b> (ZB6ZB31B + ZB6CF3)	0.022/0.049
			–	1	Red	<b>XB6CF4B2B</b> (ZB6ZB42B + ZB6CF4)	0.022/0.049
			1	1	White	<b>XB6CF1B5B</b> (ZB6ZB15B + ZB6CF1)	0.025/0.055
					Green	<b>XB6CF3B5B</b> (ZB6ZB35B + ZB6CF3)	0.025/0.055
				Red	<b>XB6CF4B5B</b> (ZB6ZB45B + ZB6CF4)	0.025/0.055	
Circular	Flush		1	–	Green	<b>XB6AF3B1B</b> (ZB6ZB31B + ZB6AF3)	0.022/0.049
			–	1	Red	<b>XB6AF4B2B</b> (ZB6ZB42B + ZB6AF4)	0.022/0.049
			1	1	White	<b>XB6AF1B5B</b> (ZB6ZB15B + ZB6AF1)	0.025/0.055
					Green	<b>XB6AF3B5B</b> (ZB6ZB35B + ZB6AF3)	0.025/0.055
				Red	<b>XB6AF4B5B</b> (ZB6ZB45B + ZB6AF4)	0.025/0.055	

Shape of head	Type of push	Color	Reference	Weight kg/lb	
Rectangular	Flush		White	<b>ZB6DF1</b>	0.016/0.035
			Green	<b>ZB6DF3</b>	0.016/0.035
			Red	<b>ZB6DF4</b>	0.016/0.035
			Yellow	<b>ZB6DF5</b>	0.016/0.035
			Blue	<b>ZB6DF6</b>	0.016/0.035
			Orange	<b>ZB6DF8</b>	0.016/0.035
			6 colors (1)	<b>ZB6DF9</b>	0.016/0.035
			Without cap (2)	<b>ZB6DF0</b>	0.016/0.035
Square	Flush		White	<b>ZB6CF1</b>	0.016/0.035
			Green	<b>ZB6CF3</b>	0.016/0.035
			Red	<b>ZB6CF4</b>	0.016/0.035
			Yellow	<b>ZB6CF5</b>	0.016/0.035
			Blue	<b>ZB6CF6</b>	0.016/0.035
			Orange	<b>ZB6CF8</b>	0.016/0.035
			6 colors (1)	<b>ZB6CF9</b>	0.016/0.035
			Without cap (2)	<b>ZB6CF0</b>	0.016/0.035
Circular	Flush		White	<b>ZB6AF1</b>	0.016/0.035
			Green	<b>ZB6AF3</b>	0.016/0.035
			Red	<b>ZB6AF4</b>	0.016/0.035
			Yellow	<b>ZB6AF5</b>	0.016/0.035
			Blue	<b>ZB6AF6</b>	0.016/0.035
			Orange	<b>ZB6AF8</b>	0.016/0.035
			6 colors (1)	<b>ZB6AF9</b>	0.016/0.035
			Without cap (2)	<b>ZB6AF0</b>	0.016/0.035

(1) Separate 6 different colored caps (White, Green, Red, Yellow, Blue and Orange) included with head.

(2) To order caps separately, see page 38.



Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

## Harmony XB6 modular

### Pilot lights with integral LED



XB6DV4BB



XB6CV1BB



XB6AV5BB



ZB6DV8









ZB6CV1



ZB6AV6

#### Pilot lights with 12...24 V integral LED

Shape of head	Color of lens cap	Reference	Weight kg/lb
<b>Complete units</b>			
<b>Rectangular</b> 	White	<b>XB6DV1BB</b> (ZB6EB1B + ZB6DV1)	0.015/0.033
	Green	<b>XB6DV3BB</b> (ZB6EB3B + ZB6DV3)	0.015/0.033
	Red	<b>XB6DV4BB</b> (ZB6EB4B + ZB6DV4)	0.015/0.033
	Yellow	<b>XB6DV5BB</b> (ZB6EB5B + ZB6DV5)	0.015/0.033
	<b>Square</b> 	White	<b>XB6CV1BB</b> (ZB6EB1B + ZB6CV1)
	Green	<b>XB6CV3BB</b> (ZB6EB3B + ZB6CV3)	0.015/0.033
	Red	<b>XB6CV4BB</b> (ZB6EB4B + ZB6CV4)	0.015/0.033
	Yellow	<b>XB6CV5BB</b> (ZB6EB5B + ZB6CV5)	0.015/0.033
<b>Circular</b> 	White	<b>XB6AV1BB</b> (ZB6EB1B + ZB6AV1)	0.015/0.033
	Green	<b>XB6AV3BB</b> (ZB6EB3B + ZB6AV3)	0.015/0.033
	Red	<b>XB6AV4BB</b> (ZB6EB4B + ZB6AV4)	0.015/0.033
	Yellow	<b>XB6AV5BB</b> (ZB6EB5B + ZB6AV5)	0.015/0.033
	<b>Heads only</b>		
<b>Rectangular</b> 	White	<b>ZB6DV1</b>	0.015/0.033
	Green	<b>ZB6DV3</b>	0.015/0.033
	Red	<b>ZB6DV4</b>	0.015/0.033
	Yellow	<b>ZB6DV5</b>	0.015/0.033
	Blue	<b>ZB6DV6</b>	0.015/0.033
	Orange	<b>ZB6DV8</b>	0.015/0.033
	6 colors (1)	<b>ZB6DV9</b>	0.015/0.033
	Without lens cap (2)	<b>ZB6DV0</b>	0.015/0.033
<b>Square</b> 	White	<b>ZB6CV1</b>	0.015/0.033
	Green	<b>ZB6CV3</b>	0.015/0.033
	Red	<b>ZB6CV4</b>	0.015/0.033
	Yellow	<b>ZB6CV5</b>	0.015/0.033
	Blue	<b>ZB6CV6</b>	0.015/0.033
	Orange	<b>ZB6CV8</b>	0.015/0.033
	6 colors (1)	<b>ZB6CV9</b>	0.015/0.033
	Without lens cap (2)	<b>ZB6CV0</b>	0.015/0.033
<b>Circular</b> 	White	<b>ZB6AV1</b>	0.015/0.033
	Green	<b>ZB6AV3</b>	0.015/0.033
	Red	<b>ZB6AV4</b>	0.015/0.033
	Yellow	<b>ZB6AV5</b>	0.015/0.033
	Blue	<b>ZB6AV6</b>	0.015/0.033
	Orange	<b>ZB6AV8</b>	0.015/0.033
	6 colors (1)	<b>ZB6AV9</b>	0.015/0.033
	Without lens cap (2)	<b>ZB6AV0</b>	0.015/0.033

(1) Separate 6 different colored lens caps (White, Green, Red, Yellow, Blue and Orange) included with head.

(2) To order lens caps separately, see page 38.

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Pushbuttons, spring return











XB6DA31B



XB6CA11B



XB6AA22B

Pushbuttons, spring return												
Shape of head	Type of push	Type of contacts		Color	Reference	Weight kg/lb						
												
		NO	NC									
<b>Complete units</b>												
<b>Rectangular</b> 	<b>Flush</b>	1	–	White	<b>XB6DA11B</b> (ZB6Z1B + ZB6DA1)	0.019/0.042						
				Green	<b>XB6DA31B</b> (ZB6Z1B + ZB6DA3)	0.019/0.042						
				Black	<b>XB6DA22B</b> (ZB6Z2B + ZB6DA2)	0.019/0.042						
				Red	<b>XB6DA42B</b> (ZB6Z2B + ZB6DA4)	0.019/0.042						
		–	1	1	1	White	<b>XB6DA15B</b> (ZB6Z5B + ZB6DA1)	0.022/0.049				
						Black	<b>XB6DA25B</b> (ZB6Z5B + ZB6DA2)	0.022/0.049				
						Green	<b>XB6DA35B</b> (ZB6Z5B + ZB6DA3)	0.022/0.049				
						Red	<b>XB6DA45B</b> (ZB6Z5B + ZB6DA4)	0.022/0.049				
		<b>Square</b> 	<b>Flush</b>	1	–	White	<b>XB6CA11B</b> (ZB6Z1B + ZB6CA1)	0.019/0.042				
						Green	<b>XB6CA31B</b> (ZB6Z1B + ZB6CA3)	0.019/0.042				
						Black	<b>XB6CA22B</b> (ZB6Z2B + ZB6CA2)	0.019/0.042				
						Red	<b>XB6CA42B</b> (ZB6Z2B + ZB6CA4)	0.019/0.042				
–	1			1	1	White	<b>XB6CA15B</b> (ZB6Z5B + ZB6CA1)	0.022/0.049				
						Black	<b>XB6CA25B</b> (ZB6Z5B + ZB6CA2)	0.022/0.049				
						Green	<b>XB6CA35B</b> (ZB6Z5B + ZB6CA3)	0.022/0.049				
						Red	<b>XB6CA45B</b> (ZB6Z5B + ZB6CA4)	0.022/0.049				
<b>Circular</b> 	<b>Flush</b>			1	–	White	<b>XB6AA11B</b> (ZB6Z1B + ZB6AA1)	0.019/0.042				
						Green	<b>XB6AA31B</b> (ZB6Z1B + ZB6AA3)	0.019/0.042				
						Black	<b>XB6AA22B</b> (ZB6Z2B + ZB6AA2)	0.019/0.042				
						Red	<b>XB6AA42B</b> (ZB6Z2B + ZB6AA4)	0.019/0.042				
		–	1	1	1	White	<b>XB6AA15B</b> (ZB6Z5B + ZB6AA1)	0.022/0.049				
						Black	<b>XB6AA25B</b> (ZB6Z5B + ZB6AA2)	0.022/0.049				
						Green	<b>XB6AA35B</b> (ZB6Z5B + ZB6AA3)	0.022/0.049				
						Red	<b>XB6AA45B</b> (ZB6Z5B + ZB6AA4)	0.022/0.049				
		<b>Rectangular</b> 	<b>Projecting</b>	–	1	Red	<b>XB6DL42B</b>	0.020/0.044				
						<b>Square</b> 	<b>Projecting</b>	–	1	Red	<b>XB6CL42B</b>	0.020/0.044
										<b>Circular</b> 	<b>Projecting</b>	–

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Pushbuttons, spring return



ZB6DA6



ZB6CA5



ZB6AA2



110767

Pushbuttons, spring return (continued)				
Shape of head	Type of push	Color of push	Reference	Weight kg/lb
<b>Heads only</b>				
<b>Rectangular</b> 	<b>Flush</b>	White	<a href="#">ZB6DA1</a>	0.016/0.035
		Black	<a href="#">ZB6DA2</a>	0.016/0.035
		Green	<a href="#">ZB6DA3</a>	0.016/0.035
		Red	<a href="#">ZB6DA4</a>	0.016/0.035
		Yellow	<a href="#">ZB6DA5</a>	0.016/0.035
		Blue	<a href="#">ZB6DA6</a>	0.016/0.035
		6 colors (1)	<a href="#">ZB6DA9</a>	0.016/0.035
		Without cap (2)	<a href="#">ZB6DA0</a>	0.016/0.035
		<b>Square</b> 	<b>Flush</b>	White
Black	<a href="#">ZB6CA2</a>			0.016/0.035
Green	<a href="#">ZB6CA3</a>			0.016/0.035
Red	<a href="#">ZB6CA4</a>			0.016/0.035
Yellow	<a href="#">ZB6CA5</a>			0.016/0.035
Blue	<a href="#">ZB6CA6</a>			0.016/0.035
6 colors (1)	<a href="#">ZB6CA9</a>			0.016/0.035
Without cap (2)	<a href="#">ZB6CA0</a>			0.016/0.035
<b>Circular</b> 	<b>Flush</b>			White
		Black	<a href="#">ZB6AA2</a>	0.016/0.035
		Green	<a href="#">ZB6AA3</a>	0.016/0.035
		Red	<a href="#">ZB6AA4</a>	0.016/0.035
		Yellow	<a href="#">ZB6AA5</a>	0.016/0.035
		Blue	<a href="#">ZB6AA6</a>	0.016/0.035
		6 colors (1)	<a href="#">ZB6AA9</a>	0.016/0.035
		Without cap (2)	<a href="#">ZB6AA0</a>	0.016/0.035
			<b>Ø 24 mm mushroom head</b>	White
Black	<a href="#">ZB6AC2</a>			0.020/0.044
Green	<a href="#">ZB6AC3</a>			0.020/0.044
Yellow	<a href="#">ZB6AC5</a>			0.020/0.044
Blue	<a href="#">ZB6AC6</a>			0.020/0.044

(1) Separate 6 different colored lens caps (White, Green, Red, Yellow, Blue and Orange) included with head.

(2) To order lens caps separately, see page 38.

## References (continued)

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Emergency stop devices conforming to EN/IEC 60204-1 and EN/ISO 13850 and to Machinery Directive 98/37/EC

Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, to Machinery Directive 98/37/EC and to standard EN/IEC 60947-5-5. Please consult our Customer Care Centre for explanation of these standards and directives.



PF514166  
XB6AS8349B



PF514167  
XB6AS9349B







110770  
ZB6AS834



110771  
ZB6AS934

### Emergency stop trigger action and mechanical latching pushbuttons

Shape of head	Type of reset	Type of contacts		Diameter of push mm/in.	Color	Reference	Weight kg/lb
		NO	NC				
<b>Complete units</b>							
	Turn to release	1	2	30/1.181	Red	<b>XB6AS8349B</b> (ZB6Z4B + ZB6E1B + ZB6AS834)	0.041/0.090
	Key release (key no. 200)	1	2	30/1.181	Red	<b>XB6AS9349B</b> (ZB6Z4B + ZB6E1B + ZB6AS934)	0.056/0.123

Shape of head	Type of reset	Diameter of push mm/in.	Color of cap	Reference	Weight kg/lb
<b>Heads only</b>					
	Turn to release	30/1.181	Red	<b>ZB6AS834</b>	0.035/0.077
	Key release (key no. 200)	30/1.181	Red	<b>ZB6AS934</b>	0.050/0.110

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Selector switches with standard handle








110584SE  
XB6DD221B



101439SE  
XB6CD221B




PF514188  
XB6AD221B

Selector switches with standard handle (switching angle: 60°)						
Shape of head	Color of handle	Type of contacts		Number and type of positions	Reference	Weight kg/lb
						
Complete units						
Rectangular 	Black	1	–	2 - stay put ↙	<b>XB6DD221B</b> (ZB6Z1B + ZB6DD22)	0.021/0.046
		1	1	2 - stay put ↙	<b>XB6DD225B</b> (ZB6Z5B + ZB6DD22)	0.024/0.053
				3 - stay put ↘	<b>XB6DD235B</b> (ZB6Z5B + ZB6DD23)	0.024/0.053
Square 	Black	1	–	2 - stay put ↙	<b>XB6CD221B</b> (ZB6Z1B + ZB6CD22)	0.021/0.046
		1	1	2 - stay put ↙	<b>XB6CD225B</b> (ZB6Z5B + ZB6CD22)	0.024/0.053
				3 - stay put ↘	<b>XB6CD235B</b> (ZB6Z5B + ZB6CD23)	0.024/0.053
Circular 	Black	1	–	2 - stay put ↙	<b>XB6AD221B</b> (ZB6Z1B + ZB6AD22)	0.021/0.046
		1	1	2 - stay put ↙	<b>XB6AD225B</b> (ZB6Z5B + ZB6AD22)	0.024/0.053
				3 - stay put ↘	<b>XB6AD235B</b> (ZB6Z5B + ZB6AD23)	0.024/0.053

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Selector switches with standard handle





ZB6DP2


## Selector switches with standard handle (continued)

Shape of head	Number and type of positions	Color of handle	Reference	Weight kg/lb
---------------	------------------------------	-----------------	-----------	--------------


Heads only (switching angle: stay put positions 60°, spring return positions 45°)

Shape of head	Number and type of positions	Color of handle	Reference	Weight kg/lb
Rectangular 	2 - stay put	Black	ZB6DD22	0.018/0.040
		Red	ZB6DD42	0.018/0.040
	3 - stay put	Black	ZB6DD23	0.018/0.040
		Red	ZB6DD43	0.018/0.040
	2 - spring return to centre	Black	ZB6DD24	0.018/0.040
		Red	ZB6DD44	0.018/0.040
	3 - spring return to centre	Black	ZB6DD25	0.018/0.040
		Red	ZB6DD45	0.018/0.040
	3 - spring return from right to centre	Black	ZB6DD26	0.018/0.040
Red		ZB6DD46	0.018/0.040	
3 - spring return from left to centre	Black	ZB6DD27	0.018/0.040	
	Red	ZB6DD47	0.018/0.040	

Shape of head	Number and type of positions	Color of handle	Reference	Weight kg/lb
Square 	2 - stay put	Black	ZB6CD22	0.018/0.040
		Red	ZB6CD42	0.018/0.040
	3 - stay put	Black	ZB6CD23	0.018/0.040
		Red	ZB6CD43	0.018/0.040
	2 - spring return to centre	Black	ZB6CD24	0.018/0.040
		Red	ZB6CD44	0.018/0.040
	3 - spring return to centre	Black	ZB6CD25	0.018/0.040
		Red	ZB6CD45	0.018/0.040
	3 - spring return from right to centre	Black	ZB6CD26	0.018/0.040
Red		ZB6CD46	0.018/0.040	
3 - spring return from left to centre	Black	ZB6CD27	0.018/0.040	
	Red	ZB6CD47	0.018/0.040	

Shape of head	Number and type of positions	Color of handle	Reference	Weight kg/lb
Circular 	2 - stay put	Black	ZB6AD22	0.018/0.040
		Red	ZB6AD42	0.018/0.040
	3 - stay put	Black	ZB6AD23	0.018/0.040
		Red	ZB6AD43	0.018/0.040
	2 - spring return to centre	Black	ZB6AD24	0.018/0.040
		Red	ZB6AD44	0.018/0.040
	3 - spring return to centre	Black	ZB6AD25	0.018/0.040
		Red	ZB6AD45	0.018/0.040
	3 - spring return from right to centre	Black	ZB6AD26	0.018/0.040
Red		ZB6AD46	0.018/0.040	
3 - spring return from left to centre	Black	ZB6AD27	0.018/0.040	
	Red	ZB6AD47	0.018/0.040	


## Heads only (switching angle: stay put positions 90°)

Shape of head	Number and type of positions	Color of handle	Reference	Weight kg/lb
Rectangular 	2 - stay put	Black	ZB6DD28	0.018/0.040
		Red	ZB6DD48	0.018/0.040

Shape of head	Number and type of positions	Color of handle	Reference	Weight kg/lb
Square 	2 - stay put	Black	ZB6CD28	0.018/0.040
		Red	ZB6CD48	0.018/0.040

Shape of head	Number and type of positions	Color of handle	Reference	Weight kg/lb
Circular 	2 - stay put	Black	ZB6AD28	0.018/0.040
		Red	ZB6AD48	0.018/0.040

## Heads + mounting base for potentiometer

Shape of head	Description	For use with	Reference	Weight kg/lb
	For potentiometer with shaft length 5...8 mm/0.197...0.315 in. (potentiometer not included)	Ø 6.35 mm/0.250 in. shaft	ZB6DP2	0.032/0.071




# Control and signaling units Ø 16 plastic

## Harmony XB6 modular illuminated selector switches


Illuminated selector switches with 12...24 V integral LED						
Shape of head	Color of push	Type of contacts		Number and type of positions	Reference (1)	Weight kg/lb
		NO	NC			

**Complete units (switching angle: stay put positions 60°)**




<b>Rectangular</b> 	White	1	1	2 - stay put	<b>XB6DK1B25B</b> (ZB6YK1+ ZB6DD02 + ZB6ZB15B)	0.024/0.053
	Green	1	1	2 - stay put	<b>XB6DK3B25B</b> (ZB6YK3+ ZB6DD02 + ZB6ZB35B)	0.024/0.053
	Red	1	1	2 - stay put	<b>XB6DK4B25B</b> (ZB6YK4+ ZB6DD02 + ZB6ZB45B)	0.024/0.053
	White	1	1	3 - stay put	<b>XB6DK1B35B</b> (ZB6YK1+ ZB6DD03 + ZB6ZB15B)	0.024/0.053
	Green	1	1	3 - stay put	<b>XB6DK3B35B</b> (ZB6YK3+ ZB6DD03 + ZB6ZB35B)	0.024/0.053
	Red	1	1	3 - stay put	<b>XB6DK4B35B</b> (ZB6YK4+ ZB6DD03 + ZB6ZB45B)	0.024/0.053






<b>Square</b> 	White	1	1	2 - stay put	<b>XB6CK1B25B</b> (ZB6YK1+ ZB6CD02 + ZB6ZB15B)	0.024/0.053
	Green	1	1	2 - stay put	<b>XB6CK3B25B</b> (ZB6YK3+ ZB6CD02 + ZB6ZB35B)	0.024/0.053
	Red	1	1	2 - stay put	<b>XB6CK4B25B</b> (ZB6YK4+ ZB6CD02 + ZB6ZB45B)	0.024/0.053
	White	1	1	3 - stay put	<b>XB6CK1B35B</b> (ZB6YK1+ ZB6CD03 + ZB6ZB15B)	0.024/0.053
	Green	1	1	3 - stay put	<b>XB6CK3B35B</b> (ZB6YK3+ ZB6CD03 + ZB6ZB35B)	0.024/0.053
	Red	1	1	3 - stay put	<b>XB6CK4B35B</b> (ZB6YK4+ ZB6CD03 + ZB6ZB45B)	0.024/0.053



<b>Circular</b> 	White	1	1	2 - stay put	<b>XB6AK1B25B</b> (ZB6YK1+ ZB6AD02 + ZB6ZB15B)	0.024/0.053
	Green	1	1	2 - stay put	<b>XB6AK3B25B</b> (ZB6YK3+ ZB6AD02 + ZB6ZB35B)	0.024/0.053
	Red	1	1	2 - stay put	<b>XB6AK4B25B</b> (ZB6YK4+ ZB6AD02 + ZB6ZB45B)	0.024/0.053
	White	1	1	3 - stay put	<b>XB6AK1B35B</b> (ZB6YK1+ ZB6AD03 + ZB6ZB15B)	0.024/0.053
	Green	1	1	3 - stay put	<b>XB6AK3B35B</b> (ZB6YK3+ ZB6AD03 + ZB6ZB35B)	0.024/0.053
	Red	1	1	3 - stay put	<b>XB6AK4B35B</b> (ZB6YK4+ ZB6AD03 + ZB6ZB45B)	0.024/0.053

**Complete units (switching angle: stay put positions 90°)**

<b>Rectangular</b> 	White	1	1	2 - stay put	<b>XB6DK1B85B</b> (ZB6YK1+ ZB6DD08 + ZB6ZB15B)	0.024/0.053
	Green	1	1	2 - stay put	<b>XB6DK3B85B</b> (ZB6YK3+ ZB6DD08 + ZB6ZB35B)	0.024/0.053
	Red	1	1	2 - stay put	<b>XB6DK4B85B</b> (ZB6YK4+ ZB6DD08 + ZB6ZB45B)	0.024/0.053
<b>Square</b> 	White	1	1	2 - stay put	<b>XB6CK1B85B</b> (ZB6YK1+ ZB6CD08 + ZB6ZB15B)	0.024/0.053
	Green	1	1	2 - stay put	<b>XB6CK3B85B</b> (ZB6YK3+ ZB6CD08 + ZB6ZB35B)	0.024/0.053
	Red	1	1	2 - stay put	<b>XB6CK4B85B</b> (ZB6YK4+ ZB6CD08 + ZB6ZB45B)	0.024/0.053
<b>Circular</b> 	White	1	1	2 - stay put	<b>XB6AK1B85B</b> (ZB6YK1+ ZB6AD08 + ZB6ZB15B)	0.024/0.053
	Green	1	1	2 - stay put	<b>XB6AK3B85B</b> (ZB6YK3+ ZB6AD08 + ZB6ZB35B)	0.024/0.053
	Red	1	1	2 - stay put	<b>XB6AK4B85B</b> (ZB6YK4+ ZB6AD08 + ZB6ZB45B)	0.024/0.053

(1) The reference of the complete selector switch is shown on the 1<sup>st</sup> line. The references of handles + heads + bodies are shown in brackets below.

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Illuminated and non illuminated selector switches



ZB6YK3



ZB6DD02



ZB6CD02



ZB6AD02




























## Handles

Description	Color	Sold in lots of	Unit reference	Weight kg/lb
<b>Component parts</b>				
Handles for illuminated selector switches (1)	White	5	ZB6YK1	0.002/0.004
	Green	5	ZB6YK3	0.002/0.004
	Red	5	ZB6YK4	0.002/0.004
	Yellow	5	ZB6YK5	0.002/0.004
	Blue	5	ZB6YK6	0.002/0.004
	Orange	5	ZB6YK8	0.002/0.004

## Replacement parts

Handles for non illuminated selector switches (2)	Black	1	ZB6YD2	0.002/0.004
	Red	1	ZB6YD4	0.002/0.004

## Heads for selector switches, without handle (3)

Shape of head	Number and type of positions	Reference	Weight kg/lb
<b>Heads only (switching angle: stay put positions 60°, spring return positions 45°)</b>			
<b>Rectangular</b> 	2 - stay put	 ZB6DD02	0.016/0.035
	3 - stay put	 ZB6DD03	0.016/0.035
	2 - spring return to centre	 ZB6DD04	0.016/0.035
	3 - spring return to centre	 ZB6DD05	0.016/0.035
	3 - spring return from right to centre	 ZB6DD06	0.016/0.035
	3 - spring return from left to centre	 ZB6DD07	0.016/0.035
	<b>Square</b> 	2 - stay put	 ZB6CD02
3 - stay put		 ZB6CD03	0.016/0.035
2 - spring return to centre		 ZB6CD04	0.016/0.035
3 - spring return to centre		 ZB6CD05	0.016/0.035
3 - spring return from right to centre		 ZB6CD06	0.016/0.035
3 - spring return from left to centre		 ZB6CD07	0.016/0.035
<b>Circular</b> 		2 - stay put	 ZB6AD02
	3 - stay put	 ZB6AD03	0.016/0.035
	2 - spring return to centre	 ZB6AD04	0.016/0.035
	3 - spring return to centre	 ZB6AD05	0.016/0.035
	3 - spring return from right to centre	 ZB6AD06	0.016/0.035
	3 - spring return from left to centre	 ZB6AD07	0.016/0.035
	<b>Heads only (switching angle: stay put positions 90°)</b>		
<b>Rectangular</b> 	2 - stay put	 ZB6DD08	0.016/0.035
<b>Square</b> 	2 - stay put	 ZB6CD08	0.016/0.035
<b>Circular</b> 	2 - stay put	 ZB6AD08	0.016/0.035

(1) Handle for use in conjunction with a head without a handle (see page 31), and a body sub-assembly for illuminated pushbuttons (see page 36)

(2) Handle for use in conjunction with a head without a handle (see page 31), and a body sub-assembly for non illuminated pushbuttons (see page 36)

(3) Handle to be ordered separately (see page 31) for bodies with 2 contact blocks maximum.

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

## Harmony XB6 modular

### Key switches































XB6DGC5B



ZB6DGA

#### Key switches (Ronis key no. 200) (1) (2)

Shape of head	Number and type of positions	Type of contacts		Reference	Weight kg/lb	
		NO	NC			
<b>Complete units (switching angle: 70°)</b>						
Rectangular 	2 - stay put		1	1	<b>XB6DGC5B</b> (ZB6Z5B + ZB6DGC)	0.036/0.079
	3 - stay put		1	1	<b>XB6DGH5B</b> (ZB6Z5B + ZB6DGH)	0.036/0.079
Square 	2 - stay put		1	1	<b>XB6CGC5B</b> (ZB6Z5B + ZB6CGC)	0.036/0.079
	3 - stay put		1	1	<b>XB6CGH5B</b> (ZB6Z5B + ZB6CGH)	0.036/0.079
Circular 	2 - stay put		1	1	<b>XB6AGC5B</b> (ZB6Z5B + ZB6AGC)	0.036/0.079
	3 - stay put		1	1	<b>XB6AGH5B</b> (ZB6Z5B + ZB6AGH)	0.036/0.079

Shape of head	Number and type of positions (3)	Key withdrawal	Reference	Weight kg/lb			
<b>Heads only (switching angle: stay put positions 70°, spring return positions 45°)</b>							
Rectangular 	2 - stay put		RH position	<b>ZB6DGA</b>	0.030/0.066		
			Centre position	<b>ZB6DGB (4)</b>	0.030/0.066		
			Both positions	<b>ZB6DGC (4)</b>	0.030/0.066		
	2 - spring return	Centre position		Centre position	<b>ZB6DGL</b>	0.030/0.066	
			3 - stay put		LH position	<b>ZB6DGD</b>	0.030/0.066
					Centre position	<b>ZB6DGE (4)</b>	0.030/0.066
				LH and Centre positions	<b>ZB6DGF</b>	0.030/0.066	
		RH position		RH position	<b>ZB6DGG</b>	0.030/0.066	
				All positions	<b>ZB6DGH (4)</b>	0.030/0.066	
				RH and LH positions	<b>ZB6DGJ</b>	0.030/0.066	
		3 - spring return from left to centre	RH and Centre positions		RH and Centre positions	<b>ZB6DGK</b>	0.030/0.066
				3 - spring return from left to centre		RH position	<b>ZB6DGM</b>
					Centre position	<b>ZB6DGN</b>	0.030/0.066
			RH and Centre positions		<b>ZB6DGP</b>	0.030/0.066	
	3 - spring return from right to centre		LH position		LH position	<b>ZB6DQG</b>	0.030/0.066
				Centre position		Centre position	<b>ZB6DGR</b>
		LH and Centre positions			<b>ZB6DGS</b>	0.030/0.066	
3 - spring return to centre	Centre position		Centre position		<b>ZB6DGT</b>	0.030/0.066	

(1) Key no. 200, withdrawal from all positions.

(2) To order a key switch with DOM 311 key, add the suffix 1 to the references selected above.  
Example: **ZB6DGA1**.

(3) The symbol  indicates the key withdrawal position.

(4) Also available with Ronis key numbers: 201, 202 and 203. To order, add the key number to the end of the reference. Example: for key switch **ZB6DGB** with Ronis key no. 201, the reference becomes: **ZB6DGB201**

Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38




















# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Key switches




ZB6CGA

## Key switches (Ronis key no. 200) (1) (2) (continued)

Shape of head	Number and type of positions (3)	Key withdrawal	Reference	Weight kg/lb
<b>Heads only (switching angle: stay put positions 70°, spring return positions 45°)</b>				
<i>(continued)</i>				
<b>Square</b> 	2 - stay put	 RH position	<b>ZB6CGA</b>	0.030/0.066
		 Centre position	<b>ZB6CGB (4)</b>	0.030/0.066
		 Both positions	<b>ZB6CGC (4)</b>	0.030/0.066
	2 - spring return	 Centre position	<b>ZB6CGL</b>	0.030/0.066
	3 - stay put	 LH position	<b>ZB6CGD</b>	0.030/0.066
		 Centre position	<b>ZB6CGE (4)</b>	0.030/0.066
		 LH and Centre positions	<b>ZB6CGF</b>	0.030/0.066
		 RH position	<b>ZB6CGG</b>	0.030/0.066
		 All positions	<b>ZB6CGH (4)</b>	0.030/0.066
		 RH and LH positions	<b>ZB6CGJ</b>	0.030/0.066
	3 - spring return from left to centre	 RH and Centre positions	<b>ZB6CGK</b>	0.030/0.066
		 RH position	<b>ZB6CGM</b>	0.030/0.066
		 Centre position	<b>ZB6CGN</b>	0.030/0.066
	3 - spring return from right to centre	 RH and Centre positions	<b>ZB6CGP</b>	0.030/0.066
		 LH position	<b>ZB6CGQ</b>	0.030/0.066
		 Centre position	<b>ZB6CGR</b>	0.030/0.066
	3 - spring return to centre	 LH and Centre positions	<b>ZB6CGS</b>	0.030/0.066
		 Centre position	<b>ZB6CGT</b>	0.030/0.066

(1) Key no. 200, withdrawal from all positions.

(2) To order a key switch with DOM 311 key, add the suffix 1 to the references selected above.  
Example: **ZB6CGA1**.

(3) The symbol  indicates the key withdrawal position.

(4) Also available with Ronis key numbers: 201, 202 and 203. To order, add the key number to the end of the reference. Example: for key switch **ZB6CGB** with Ronis key no. 201, the reference becomes: **ZB6CGB201**.




















Assembly of other products, using:  
body/contact assemblies: see page 36  
accessories: see page 38

# Control and signaling units Ø 16 plastic

## Harmony XB6 modular


### Key switches



Key switches (Ronis key no. 200) (continued) (1)				
Shape of head	Number and type of positions (3)	Key withdrawal	Reference	Weight kg/lb
<b>Heads only (switching angle: stay put positions 70°, spring return positions 45°) (continued)</b>				
Circular 	2 - stay put		RH position <b>ZB6AGA</b>	0.030/0.066
			Centre position <b>ZB6AGB</b> (2)	0.030/0.066
			Both positions <b>ZB6AGC</b> (2)	0.030/0.066
	2 - spring return from right to centre		Centre position <b>ZB6AGL</b>	0.030/0.066
		3 - stay put		LH position <b>ZB6AGD</b>
			Centre position <b>ZB6AGE</b> (2)	0.030/0.066
			LH and Centre positions <b>ZB6AGF</b>	0.030/0.066
			RH position <b>ZB6AGG</b>	0.030/0.066
			All positions <b>ZB6AGH</b> (2)	0.030/0.066
			RH and LH positions <b>ZB6AGJ</b>	0.030/0.066
			RH and Centre positions <b>ZB6AGK</b>	0.030/0.066
	3 - spring return from left to centre		RH position <b>ZB6AGM</b>	0.030/0.066
			Centre position <b>ZB6AGN</b>	0.030/0.066
			RH and Centre positions <b>ZB6AGP</b>	0.030/0.066
	3 - spring return from right to centre		Left-hand position <b>ZB6AGQ</b>	0.030/0.066
		Centre position <b>ZB6AGR</b>	0.030/0.066	
		LH and Centre positions <b>ZB6AGS</b>	0.030/0.066	
3 - spring return to centre		Centre position <b>ZB6AGT</b>	0.030/0.066	

(1) To order a key switch with DOM 311 key, add the suffix 1 to the references selected above.  
Example: **ZB6AGA1**.


(2) Also available with Ronis key numbers: 201, 202 and 203. To order, add the key number to the end of the reference. Example: for key switch **ZB6AGB** with Ronis key no. 201, the reference becomes: **ZB6AGB201**.

(3) The symbol  indicates the key withdrawal position.

# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Complete bodies for pushbuttons

To combine with heads:  
see page 23




ZB6ZB11B



ZB6ZH01B



ZB6Z1B



ZB6Y009



ZB6Y011

### Complete bodies for illuminated pushbuttons (1)

Description	Supply voltage V	Type of contacts		Color of light source	Reference	Weight kg/lb
		NO	NC			
<b>Faston connectors</b>						
Fixing collar + contact block + LED (2)	≈ 12...24	1	–	White	ZB6ZB11B	0.006/0.013
				Green	ZB6ZB31B	0.006/0.013
				Yellow	ZB6ZB51B	0.006/0.013
	–	1	Red	ZB6ZB42B	0.006/0.013	
			Yellow	ZB6ZB52B	0.006/0.013	
	1	1	White	ZB6ZB15B	0.009/0.020	
			Green	ZB6ZB35B	0.009/0.020	
			Red	ZB6ZB45B	0.009/0.020	
			Yellow	ZB6ZB55B	0.009/0.020	
			Blue	ZB6ZB65B	0.009/0.020	
Direct supply Fixing collar + contact block for incandescent bulb (not included) T1 1/4 (3)	3...24	1	–	–	ZB6ZH01B	0.006/0.013
				–	ZB6ZH02B	0.006/0.013
	1	1	–	ZB6ZH05B	0.009/0.020	

### Complete bodies for pushbuttons or selector switches

Description	Supply voltage V	Type of contacts		Reference	Weight kg/lb
		NO	NC		
<b>Faston connectors</b>					
Direct supply Fixing collar + contact block	≤ 250	1	–	ZB6Z1B	0.004/0.009
				ZB6Z2B	0.004/0.009
		2	–	ZB6Z3B	0.006/0.013
				ZB6Z4B	0.006/0.013
		1	1	ZB6Z5B	0.006/0.013

### Accessories

Description	Application	Sold in lots of	Unit reference	Weight kg/lb
Body/fixing collar	For mounting contact blocks and light source	10	ZB6Y009	0.002/0.004
Body bracket (fixing screws included)	Printed circuit board mounting	4	ZB6Y011	0.010/0.022

(1) It is possible to assemble illuminated selector switches by using an illuminated pushbutton body sub-assembly in conjunction with a selector switch head supplied without handle and a transparent handle (see page 32).

(2) The color of the LED must be the same as that of the pushbutton cap.

(3) Bulb to be ordered separately (see page 45).



# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Complete bodies for pilot lights

To combine with heads:  
see page 23



ZB6EB1B




ZB6EH0B



ZB6EB1A



ZB6EH0A



ZB6E1B

## Complete bodies for pilot lights (light source)

Description	Supply voltage V	Sold in lots of	Color of light source	Unit reference	Weight kg/lb
<b>Faston connectors (direct mounting by the head)</b>					
<b>Integral LED</b> (1)	~ 12...24	5	White	ZB6EB1B	0.003/0.007
			Green	ZB6EB3B	0.003/0.007
			Red	ZB6EB4B	0.003/0.007
			Yellow	ZB6EB5B	0.003/0.007
			Blue	ZB6EB6B	0.003/0.007
	~ 48...120	5	White	ZB6EG1B	0.003/0.007
			Green	ZB6EG3B	0.003/0.007
			Red	ZB6EG4B	0.003/0.007
			Yellow	ZB6EG5B	0.003/0.007
			Blue	ZB6EG6B	0.003/0.007
~ 230...240	5	White	ZB6EM1B	0.003/0.007	
		Green	ZB6EM3B	0.003/0.007	
		Red	ZB6EM4B	0.003/0.007	
		Yellow	ZB6EM5B	0.003/0.007	
		Blue	ZB6EM6B	0.003/0.007	
<b>With resistor</b> for 95 V neon bulb (not included) T1 1/4 (2) (3)	~ 120	5	–	ZB6EG0B	0.003/0.007
	~ 230	5	–	ZB6EM0B	0.003/0.007

<b>Direct supply</b> for 0.6 W max. incandescent bulb (not included) T1 1/4 (2)	~ ≤ 24	5	–	ZB6EH0B	0.003/0.007
--	--------	---	---	---------	-------------

## Pins for printed circuit board connection (mounting by the body, see page 36)

<b>Integral LED</b> (1)	~ 12...24	5	White	ZB6EB1A	0.003/0.007
			Green	ZB6EB3A	0.003/0.007
			Red	ZB6EB4A	0.003/0.007
			Yellow	ZB6EB5A	0.003/0.007
			Blue	ZB6EB6A	0.003/0.007
<b>Direct supply</b> for 0.6 W max. incandescent bulb (not included) T1 1/4 (2)	~ 3...24	5	–	ZB6EH0A	0.003/0.007

## Separate contact blocks

Type of contacts	For use with bodies	Type of contacts		Sold in lots of	Unit reference	Weight kg/lb
		NO	NC			
Silver alloy	Faston	1	–	10	ZB6E1B	0.004/0.009
		–	1	10	ZB6E2B	0.004/0.009
	Printed circuit ZB6Y011	1	–	10	ZB6E1A	0.004/0.009
		–	1	10	ZB6E2A	0.004/0.009
Gold flashed	Faston	1	–	10	ZB6E1E	0.004/0.009
		–	1	10	ZB6E2E	0.004/0.009
	Printed circuit ZB6Y011	1	–	10	ZB6E1D	0.004/0.009
		–	1	10	ZB6E2D	0.004/0.009

(1) The color of the LED must be same as that of the pushbutton cap.




(2) Bulb to be ordered separately (see page 45).

(3) Neon bulbs must only be used with Red, Yellow or White lens caps.

# Control and signaling units Ø 16 plastic

Harmony XB6 modular  
Accessories for heads  
Unmarked lens caps and caps

To combine with heads:  
see page 23



## Unmarked lens caps

Application	Color of lens cap	Sold in lots of	Unit reference			Weight kg/lb
			Rectangular head	Square head	Circular head	
Pilot lights	White	10	ZB6YDV1	ZB6YCV1	ZB6YAV1	0.001/0.002
	Green	10	ZB6YDV3	ZB6YCV3	ZB6YAV3	0.001/0.002
	Red	10	ZB6YDV4	ZB6YCV4	ZB6YAV4	0.001/0.002
	Yellow	10	ZB6YDV5	ZB6YCV5	ZB6YAV5	0.001/0.002
	Blue	10	ZB6YDV6	ZB6YCV6	ZB6YAV6	0.001/0.002
	Orange	10	ZB6YDV8	ZB6YCV8	ZB6YAV8	0.001/0.002

## Pushbutton caps - unmarked

Application	Color of cap	Sold in lots of	Unit reference			Weight kg/lb
			Rectangular head	Square head	Circular head	
Illuminated pushbuttons, with flush push	White	10	ZB6YDW1	ZB6YCW1	ZB6YAW1	0.001/0.002
	Green	10	ZB6YDW3	ZB6YCW3	ZB6YAW3	0.001/0.002
	Red	10	ZB6YDW4	ZB6YCW4	ZB6YAW4	0.001/0.002
	Yellow	10	ZB6YDW5	ZB6YCW5	ZB6YAW5	0.001/0.002
	Blue	10	ZB6YDW6	ZB6YCW6	ZB6YAW6	0.001/0.002
	Orange	10	ZB6YDW8	ZB6YCW8	ZB6YAW8	0.001/0.002
Illuminated pushbuttons, with projecting push	White	10	ZB6YDE1	ZB6YCE1	ZB6YAE1	0.001/0.002
	Green	10	ZB6YDE3	ZB6YCE3	ZB6YAE3	0.001/0.002
	Red	10	ZB6YDE4	ZB6YCE4	ZB6YAE4	0.001/0.002
	Yellow	10	ZB6YDE5	ZB6YCE5	ZB6YAE5	0.001/0.002
	Blue	10	ZB6YDE6	ZB6YCE6	ZB6YAE6	0.001/0.002
	Orange	10	ZB6YDE8	ZB6YCE8	ZB6YAE8	0.001/0.002
Non illuminated pushbuttons	White	10	ZB6YDA1	ZB6YCA1	ZB6YAA1	0.001/0.002
	Black	10	ZB6YDA2	ZB6YCA2	ZB6YAA2	0.001/0.002
	Green	10	ZB6YDA3	ZB6YCA3	ZB6YAA3	0.001/0.002
	Red	10	ZB6YDA4	ZB6YCA4	ZB6YAA4	0.001/0.002
	Yellow	10	ZB6YDA5	ZB6YCA5	ZB6YAA5	0.001/0.002
	Blue	10	ZB6YDA6	ZB6YCA6	ZB6YAA6	0.001/0.002

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Accessories for heads: marked pushbutton caps

To combine with heads:  
see page 23



ZB6YD200






ZB6YD100



ZB6YA200

## Pushbutton caps - marked

Marking	Color of cap	Sold in lots of	Unit reference			Weight kg/lb
White on colored cap Black on white cap			Rectangular head	Square head	Circular head	
						

## For non illuminated, flush pushbuttons

Marking	Color of cap	Sold in lots of	Unit reference			Weight kg/lb
0	White	10	ZB6YD100	ZB6YC100	ZB6YA100	0.001/0.002
	Black	10	ZB6YD200	ZB6YC200	ZB6YA200	0.001/0.002
1	White	10	ZB6YD101	ZB6YC101	ZB6YA101	0.001/0.002
	Black	10	ZB6YD201	ZB6YC201	ZB6YA201	0.001/0.002
2	White	10	ZB6YD102	ZB6YC102	ZB6YA102	0.001/0.002
	Black	10	ZB6YD202	ZB6YC202	ZB6YA202	0.001/0.002
3	White	10	ZB6YD103	ZB6YC103	ZB6YA103	0.001/0.002
	Black	10	ZB6YD203	ZB6YC203	ZB6YA203	0.001/0.002
4	White	10	ZB6YD104	ZB6YC104	ZB6YA104	0.001/0.002
	Black	10	ZB6YD204	ZB6YC204	ZB6YA204	0.001/0.002
5	White	10	ZB6YD105	ZB6YC105	ZB6YA105	0.001/0.002
	Black	10	ZB6YD205	ZB6YC205	ZB6YA205	0.001/0.002
6	White	10	ZB6YD106	ZB6YC106	ZB6YA106	0.001/0.002
	Black	10	ZB6YD206	ZB6YC206	ZB6YA206	0.001/0.002
7	White	10	ZB6YD107	ZB6YC107	ZB6YA107	0.001/0.002
	Black	10	ZB6YD207	ZB6YC207	ZB6YA207	0.001/0.002
8	White	10	ZB6YD108	ZB6YC108	ZB6YA108	0.001/0.002
	Black	10	ZB6YD208	ZB6YC208	ZB6YA208	0.001/0.002
9	White	10	ZB6YD109	ZB6YC109	ZB6YA109	0.001/0.002
	Black	10	ZB6YD209	ZB6YC209	ZB6YA209	0.001/0.002
I	White	10	ZB6YD111	ZB6YC111	ZB6YA111	0.001/0.002
	Green	10	ZB6YD311	ZB6YC311	ZB6YA311	0.001/0.002
O	Black	10	ZB6YD210	ZB6YC210	ZB6YA210	0.001/0.002
	Red	10	ZB6YD410	ZB6YC410	ZB6YA410	0.001/0.002

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Accessories for heads: marked pushbutton caps

To combine with heads:  
see page 23



ZB6YD116



ZB6YC441



ZB6YA224

## Pushbutton caps - marked (continued)

Marking	Color of cap	Sold in lots of	Unit reference			Weight kg/lb
White on colored cap – Black on white cap	–	–	Rectangular head 	Square head 	Circular head 	

## For non illuminated, flush pushbuttons (continued)

II	White	5	ZB6YD112	ZB6YC112	ZB6YA112	0.001/0.002
	Black	5	ZB6YD212	ZB6YC212	ZB6YA212	0.001/0.002
III	White	5	ZB6YD113	ZB6YC113	ZB6YA113	0.001/0.002
	Black	5	ZB6YD213	ZB6YC213	ZB6YA213	0.001/0.002
+	White	5	ZB6YD114	ZB6YC114	ZB6YA114	0.001/0.002
	Black	5	ZB6YD214	ZB6YC214	ZB6YA214	0.001/0.002
-	White	5	ZB6YD115	ZB6YC115	ZB6YA115	0.001/0.002
	Black	5	ZB6YD215	ZB6YC215	ZB6YA215	0.001/0.002
MARCHE	White	5	ZB6YD116	ZB6YC116	ZB6YA116	0.001/0.002
	Green	5	ZB6YD316	ZB6YC316	ZB6YA316	0.001/0.002
ON	White	5	ZB6YD117	ZB6YC117	ZB6YA117	0.001/0.002
	Green	5	ZB6YD317	ZB6YC317	ZB6YA317	0.001/0.002
START	Green	5	ZB6YD340	ZB6YC340	ZB6YA340	0.001/0.002
EIN	White	5	ZB6YD118	ZB6YC118	ZB6YA118	0.001/0.002
	Green	5	ZB6YD318	ZB6YC318	ZB6YA318	0.001/0.002
ARRET	Black	5	ZB6YD223	ZB6YC223	ZB6YA223	0.001/0.002
	Red	5	ZB6YD423	ZB6YC423	ZB6YA423	0.001/0.002
STOP	Red	5	ZB6YD441	ZB6YC441	ZB6YA441	0.001/0.002
OFF	Black	5	ZB6YD224	ZB6YC224	ZB6YA224	0.001/0.002
	Red	5	ZB6YD424	ZB6YC424	ZB6YA424	0.001/0.002
AUS	Black	5	ZB6YD225	ZB6YC225	ZB6YA225	0.001/0.002
	Red	5	ZB6YD425	ZB6YC425	ZB6YA425	0.001/0.002
R	Blue	5	ZB6YD626	ZB6YC626	ZB6YA626	0.001/0.002
MONTEE	White	5	ZB6YD129	ZB6YC129	ZB6YA129	0.001/0.002
	Black	5	ZB6YD229	ZB6YC229	ZB6YA229	0.001/0.002

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Accessories for heads: marked pushbutton caps

To combine with heads:  
see page 23



ZB6YD219






ZB6YD131



ZB6YA232

## Pushbutton caps - marked (continued)

Marking	Color of cap	Sold in lots of	Unit reference			Weight kg/lb
White on colored cap – Black on white cap	–	–	Rectangular head 	Square head 	Circular head 	

## For non illuminated, flush pushbuttons (continued)

UP	White	5	ZB6YD127	ZB6YC127	ZB6YA127	0.001/0.002
	Black	5	ZB6YD227	ZB6YC227	ZB6YA227	0.001/0.002
DESCENTE	White	5	ZB6YD130	ZB6YC130	ZB6YA130	0.001/0.002
	Black	5	ZB6YD230	ZB6YC230	ZB6YA230	0.001/0.002
DOWN	White	5	ZB6YD128	ZB6YC128	ZB6YA128	0.001/0.002
	Black	5	ZB6YD228	ZB6YC228	ZB6YA228	0.001/0.002
AB	White	5	ZB6YD134	ZB6YC134	ZB6YA134	0.001/0.002
	Black	5	ZB6YD234	ZB6YC234	ZB6YA234	0.001/0.002
FERME	White	5	ZB6YD133	ZB6YC133	ZB6YA133	0.001/0.002
	Black	5	ZB6YD233	ZB6YC233	ZB6YA233	0.001/0.002
CLOSE	White	5	ZB6YD132	ZB6YC132	ZB6YA132	0.001/0.002
	Black	5	ZB6YD232	ZB6YC232	ZB6YA232	0.001/0.002
ZU	White	5	ZB6YD131	ZB6YC131	ZB6YA131	0.001/0.002
	Black	5	ZB6YD231	ZB6YC231	ZB6YA231	0.001/0.002
↑	White	5	ZB6YD119	ZB6YC119	ZB6YA119	0.001/0.002
	Black	5	ZB6YD219	ZB6YC219	ZB6YA219	0.001/0.002
↓	White	5	ZB6YD120	ZB6YC120	ZB6YA120	0.001/0.002
	Black	5	ZB6YD220	ZB6YC220	ZB6YA220	0.001/0.002
→	White	5	ZB6YD121	ZB6YC121	ZB6YA121	0.001/0.002
	Black	5	ZB6YD221	ZB6YC221	ZB6YA221	0.001/0.002
←	White	5	ZB6YD122	ZB6YC122	ZB6YA122	0.001/0.002
	Black	5	ZB6YD222	ZB6YC222	ZB6YA222	0.001/0.002

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Accessories for heads: legends and legend holder, 8 x 21 mm marked legends

To combine with heads: see page 23



ZB6YD20



ZB6YD32



ZB6Y1001



ZB6Y3001



ZB6Y2178

## Legend holder 24 x 28 mm/ 0.945 x 1.102 in. (size 1) for 8 x 21 mm/0.315 x 0.827 in. legend (1)

Description	Color of legend	Sold in lots of	Unit reference	Weight kg/lb
Without legend	–	10	ZB6YD20	0.001/0.002
With blank legend	White or Yellow background	10	ZB6YD21	0.001/0.002
	Black or Red background	10	ZB6YD22	0.001/0.002

## Legend holder 24 x 36 mm/0.945 x 1.417 in. (size 2) for 16 x 21 mm/0.630 x 0.827 in. legend (1)

Description	Color of legend	Sold in lots of	Unit reference	Weight kg/lb
Without legend	–	10	ZB6YD30	0.001/0.002
With blank legend	White or Yellow background	10	ZB6YD31	0.001/0.002
	Black or Red background	10	ZB6YD32	0.001/0.002

## Blank legends

Dimensions	For use with	Color	Sold in lots of	Unit reference	Weight kg/lb
8 x 21 mm /0.315 x 0.827 in.	Size 1 legend holder ZB6YD20	Yellow or White background	20	ZB6Y1001	0.001/0.002
		Black or Red background	20	ZB6Y2001	0.001/0.002
16 x 21 mm /0.630 x 0.827 in.	Size 2 legend holder ZB6YD30	Yellow or White background	20	ZB6Y4001	0.001/0.002
		Black or Red background	20	ZB6Y3001	0.001/0.002

## Legends for engraving (2)

Dimensions	For use with	Color	Sold in lots of	Unit reference	Weight kg/lb
8 x 21 mm /0.315 x 0.827 in.	Size 1 legend holder ZB6YD20	Yellow or White background	10	ZB6Y1900	0.001/0.002
		Black or Red background	10	ZB6Y2900	0.001/0.002
16 x 21 mm /0.630 x 0.827 in.	Size 2 legend holder ZB6YD30	Yellow or White background	10	ZB6Y4900	0.001/0.002
		Black or Red background	10	ZB6Y3900	0.001/0.002

## 8 x 21 mm/0.315 x 0.827 in. marked legends

(for "size 1" 24 x 28 mm/0.945 x 1.102 in. legend holders ZB6YD20)

Color	Language	Marking	Sold in lots of	Unit reference	Weight kg/lb
Black or Red background (3)	International	O-I	5	ZB6Y2178	0.001/0.002
		I-II	5	ZB6Y2179	0.001/0.002
		I-O-II	5	ZB6Y2186	0.001/0.002
		← O →	5	ZB6Y2190	0.001/0.002

(1) For legends, see below and also following page.

(2) Pre-engraved legends. When ordering, clearly state the background color, text to be engraved: (either 1 line for 8 x 21 mm/0.315 x 0.827 in. or 2 lines for 16 x 21 mm/0.630 x 0.827 in. legends - in both cases, maximum 10 characters per line) and the quantity. Minimum quantity: 25 identical legends.

(3) "Start" functions: white letters on black background. "Stop" functions: white letters on red background (unless otherwise specified above).



# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Accessories for heads: 8 x 21 mm marked legends

To combine with heads:  
see page 23

## 8 x 21 mm/0.315 x 0.827 in. marked legends (for "size 1" 24 x 28 mm/0.945 x 1.102 in. legend holders ZB6YD20) (continued)

Color	Language	Marking	Sold in lots of	Unit reference	Weight kg/lb
Black or red background (1)	French	ARRET	5	ZB6Y2104	0.001/0.002
		ARRIERE	5	ZB6Y2106	0.001/0.002
		AVANT	5	ZB6Y2105	0.001/0.002
		DEFAULT	5	ZB6Y2134	0.001/0.002
		DESCENTE	5	ZB6Y2108	0.001/0.002
		DROITE	5	ZB6Y2109	0.001/0.002
		EN SERVICE	5	ZB6Y2111	0.001/0.002
		FERME	5	ZB6Y2114	0.001/0.002
		GAUCHE	5	ZB6Y2110	0.001/0.002
		HORS SERVICE	5	ZB6Y2112	0.001/0.002
		OUVERT	5	ZB6Y2113	0.001/0.002
		MAIN-O-AUTO	5	ZB6Y2187	0.001/0.002
		MARCHE	5	ZB6Y2103	0.001/0.002
		MONTEE	5	ZB6Y2107	0.001/0.002
		REARMEMENT	5	ZB6Y2123	0.001/0.002
			English	HAND-O-AUTO	5
CLOSE	5			ZB6Y2314	0.001/0.002
DOWN	5			ZB6Y2308	0.001/0.002
FORWARD	5			ZB6Y2305	0.001/0.002
FAULT	5			ZB6Y2334	0.001/0.002
LEFT	5			ZB6Y2310	0.001/0.002
OFF	5			ZB6Y2312	0.001/0.002
ON	5			ZB6Y2303	0.001/0.002
OPEN	5			ZB6Y2313	0.001/0.002
RESET	5			ZB6Y2323	0.001/0.002
REVERSE	5			ZB6Y2306	0.001/0.002
RIGHT	5			ZB6Y2309	0.001/0.002
RUN	5			ZB6Y2311	0.001/0.002
STOP	5			ZB6Y2304	0.001/0.002
UP	5	ZB6Y2307	0.001/0.002		
	German	AB	5	ZB6Y2208	0.001/0.002
		AUF	5	ZB6Y2207	0.001/0.002
		AUS	5	ZB6Y2212	0.001/0.002
		BETRIEB	5	ZB6Y2211	0.001/0.002
		EIN	5	ZB6Y2203	0.001/0.002
		HALT	5	ZB6Y2204	0.001/0.002
		HAND-O-AUTO	5	ZB6Y2287	0.001/0.002
		LINKS	5	ZB6Y2210	0.001/0.002
		ÖFFNEN	5	ZB6Y2213	0.001/0.002
		RECHTS	5	ZB6Y2209	0.001/0.002
		RÜCKSTELLUNG	5	ZB6Y2223	0.001/0.002
		SCHLIESSEN	5	ZB6Y2214	0.001/0.002
		STÖRUNG	5	ZB6Y2234	0.001/0.002
		VOR	5	ZB6Y2205	0.001/0.002
ZURÜCK	5	ZB6Y2206	0.001/0.002		
	Spanish	ADELANTE	5	ZB6Y2405	0.001/0.002
		APERTURA	5	ZB6Y2413	0.001/0.002
		ATRAS	5	ZB6Y2406	0.001/0.002
		BAJADA	5	ZB6Y2408	0.001/0.002
		CIERRE	5	ZB6Y2414	0.001/0.002
		DEFECTO	5	ZB6Y2434	0.001/0.002
		DERECHA	5	ZB6Y2409	0.001/0.002
		EN SERVICIO	5	ZB6Y2411	0.001/0.002
		FUERA SERV.	5	ZB6Y2412	0.001/0.002
		IZQUIERDA	5	ZB6Y2410	0.001/0.002
		MARCHA	5	ZB6Y2403	0.001/0.002
		PARADA	5	ZB6Y2404	0.001/0.002
		REARME	5	ZB6Y2423	0.001/0.002
		SUBIDA	5	ZB6Y2405	0.001/0.002

(1) "Start" functions: white letters on black background. "Stop" functions: white letters on red background (unless otherwise specified above).



ZB6Y2104



ZB6Y2304



ZB6Y2204




ZB6Y2404

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Accessories for heads: legends for insertion, for printing, pre-printed, labelling software, circular legends

To combine with heads: see page 23

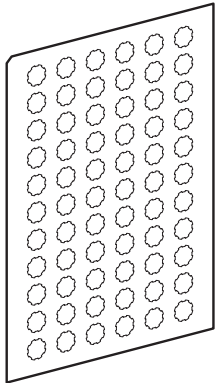

ZB6YA003

### Sheets of peel-off legends

Description	Application	Sold in lots of	Unit reference	Weight kg/lb
Sheets of 66 peel-off, transparent, self-adhesive legends	Rectangular pilot lights	10	ZB6YD003	0.030/0.066
	Square pilot lights	10	ZB6YC003	0.030/0.066
	Circular pilot lights	10	ZB6YA003	0.030/0.066
	Rectangular illuminated pushbuttons	10	ZB6YD013	0.030/0.066
	Square illuminated pushbuttons	10	ZB6YC013	0.030/0.066
	Circular illuminated pushbuttons	10	ZB6YA013	0.030/0.066

### “SIS Label” labelling software

Application	Reference	Weight kg/lb
Legend design for English, French, German, Italian, Spanish	XBY2U	0.100/0.220



XBY2U


### Circular legends for Emergency Stop mushroom head pushbuttons (yellow)

Diameter mm	Marking on yellow background	Reference	Weight kg/lb
45	Without (1)	ZB6Y7001	0.001/0.002
	ARRET D'URGENCE (1)	ZB6Y7130	0.001/0.002
	EMERGENCY STOP (1)	ZB6Y7330	0.001/0.002
	PARADA EMERGENCIA (1)	ZB6Y7430	0.001/0.002
	ARRESTO EMERGENZA (1)	ZB6Y7630	0.001/0.002
	NOT-HALT (1)	ZB6Y7230	0.001/0.002

XB6\_631\_CPODA20161005



ZB6Y7130





(1) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

To combine with heads:  
see page 23

# Control and signaling units Ø 16 plastic

Harmony XB6 modular

Accessories for pushbuttons and pilot lights

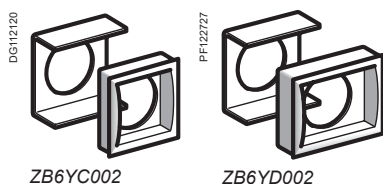

## Mounting accessories

Description	Application	Sold in lots of	Unit reference	Weight kg/lb	
Adapters for flush mounting	For flush mounting a circular pushbutton, switch or pilot light in a Ø 22 mm/0.866 in. hole	10	ZB6YA002	0.030/0.066	
	For flush mounting a square pushbutton, switch or pilot light in a Ø 21 x 21 mm/0.827 x 0.827 in. square hole	5	ZB6YC002	0.032/0.071	
	For flush mounting a rectangular pushbutton, switch or pilot light in a Ø 21 x 27/0.827 x 1.063 in. rectangular hole	5	ZB6YD002	0.032/0.071	
Plug-in socket adapter	Printed circuit board mounting	10	ZB6Y010	0.004/0.009	
Dummy contact block housing (without contacts)	Printed circuit board mounting	Without pins for printed circuit	10	ZB6Y006	0.001/0.002
		With pins for printed circuit	10	ZB6Y006A	0.001/0.002
Adapter for XAL control station (Ø 22 mm/0.866 in. to Ø 16mm/0.630 in. reducer)	Ø 16 circular, square or rectangular units	5	ZB6Y020	0.038/0.084	

## Bulbs

Description	Voltage	Sold in lots of	Unit reference	Weight kg/lb
Incandescent bulbs 2-pin T1 1/4	6 V	6	ZB6YA006	0.002/0.004
	12 V	10	ZB6YJ012	0.002/0.004
	24 V (1)	20	ZB6YB028	0.002/0.004
Neon bulbs	110 / 230 V (2)	5	ZB6YG095	0.002/0.004

## Accessories for key switches

Description	Application	Sold in lots of	Unit reference	Weight kg/lb
Ronis key no. 200	Key switches	2	ZB6Y007	0.006/0.013
Ronis key no. 201	Key switches	2	ZB6Y201	0.006/0.013
Ronis key no. 202	Key switches	2	ZB6Y202	0.006/0.013
Ronis key no. 203	Key switches	2	ZB6Y203	0.006/0.013
DOM 311 key	Key switches	2	ZB6Y008	0.006/0.013

## Protection accessories

Protective cover	Protection of contacts against direct finger contact	10	ZB6Y001	0.005/0.011
Protective shutters (3)	Circular or square pushbuttons and switches	1	ZB6YA001	0.003/0.007
	Rectangular pushbuttons and switches	1	ZB6YD001	0.003/0.007

## Miscellaneous accessories

Anti-rotation plate	Selector switches, Emergency stop buttons	10	ZB6Y003	0.001/0.002
Nut	Securing head on support	10	ZB6Y002	0.001/0.002
Dismantling tool	Removal of contact blocks from body/fixing collar	5	ZB6Y018	0.005/0.011
Extractor	Removal of pushbutton caps	5	ZB6Y016	0.010/0.022
Bezel tightening tool + bulb extractor	Tightening and slackening the bezel and changing bulbs	2	ZB6Y905	0.006/0.013
Metal assembly tool	Tightening of fixing nut	1	ZB6Y906	0.022/0.049
Dismantling tool kit, comprising 3 tools	Removal of contacts, fixing nuts and pushbutton caps	1	ZB6Y019	0.030/0.066
Female Faston connector	–	100	ZB6Y004	0.002/0.004
Blanking plug	–	10	ZB6Y005	0.001/0.002

(1) 28 V bulb supplied for use on 24 V.

(2) 95 V bulb supplied for use on 110/230 V.

(3) The thickness of the protective shutters must be taken into account when fitting with plug-in socket adapter (ZB6Y010).

<b>X</b>									
XB6ECF4B1P	13	XB6EDA51P	10	XB6EDW6B2P	12	ZB6AGB	35	ZB6CD48	30
XB6ECF4B2P	13	XB6EDA52P	10	XB6EDW6J1P	12	ZB6AGC	35	ZB6CE1	23
XB6ECF4J1P	13	XB6EDA61P	10	XB6EDW6J2P	12	ZB6AGD	35	ZB6CE3	23
XB6ECF4J2P	13	XB6EDA62P	10	XB6EDW8B1P	12	ZB6AGE	35	ZB6CE4	23
XB6ECF5B1P	13	XB6EDD221P	14	XB6EDW8B2P	12	ZB6AGF	35	ZB6CE5	23
XB6ECF5B2P	13	XB6EDD222P	14	XB6EDW8J1P	12	ZB6AGG	35	ZB6CE6	23
XB6ECF5J1P	13	XB6EDD232P	14	XB6EDW8J2P	12	ZB6AGH	35	ZB6CE8	23
XB6ECF5J2P	13	XB6EDF1B1P	13	XB6ETI522P	13	ZB6AGJ	35	ZB6CE9	23
XB6ECF6B1P	13	XB6EDF1B2P	13	XB6ETI523P	13	ZB6AGK	35	ZB6CF0	24
XB6ECF6B2P	13	XB6EDF1J1P	13	XB6ETN521P	13	ZB6AGL	35	ZB6CF1	24
XB6ECF6J1P	13	XB6EDF1J2P	13	XYB2U	44	ZB6AGM	35	ZB6CF3	24
XB6ECF6J2P	13	XB6EDF3B1P	13			ZB6AGN	35	ZB6CF4	24
XB6ECF8B1P	13	XB6EDF3B2P	13	<b>Z</b>		ZB6AGP	35	ZB6CF5	24
XB6ECF8B2P	13	XB6EDF3J1P	13	ZB6AA0	27	ZB6AGQ	35	ZB6CF6	24
XB6ECF8J1P	13	XB6EDF3J2P	13	ZB6AA1	27	ZB6AGR	35	ZB6CF8	24
XB6ECF8J2P	13	XB6EDF4B1P	13	ZB6AA2	27	ZB6AGS	35	ZB6CF9	24
XB6ECG221P	14	XB6EDF4B2P	13	ZB6AA3	27	ZB6AGT	35	ZB6CGA	34
XB6ECG222P	14	XB6EDF4J1P	13	ZB6AA4	27	ZB6AS834	28	ZB6CGB	34
XB6ECG232P	14	XB6EDF4J2P	13	ZB6AA5	27	ZB6AS934	28	ZB6CGC	34
XB6ECV1BP	11	XB6EDF5B1P	13	ZB6AA6	27	ZB6AV0	25	ZB6CGD	34
XB6ECV1JP	11	XB6EDF5B2P	13	ZB6AA9	27	ZB6AV1	25	ZB6CGE	34
XB6ECV3BP	11	XB6EDF5J1P	13	ZB6AC1	27	ZB6AV3	25	ZB6CGF	34
XB6ECV3JP	11	XB6EDF5J2P	13	ZB6AC2	27	ZB6AV4	25	ZB6CGG	34
XB6ECV4BP	11	XB6EDF6B1P	13	ZB6AC3	27	ZB6AV5	25	ZB6CGH	34
XB6ECV4JP	11	XB6EDF6B2P	13	ZB6AC5	27	ZB6AV6	25	ZB6CGJ	34
XB6ECV5BP	11	XB6EDF6J1P	13	ZB6AC6	27	ZB6AV8	25	ZB6CGK	34
XB6ECV5JP	11	XB6EDF6J2P	13	ZB6AD02	32	ZB6AV9	25	ZB6CGL	34
XB6ECV6BP	11	XB6EDF8B1P	13	ZB6AD03	32	ZB6AW0	23	ZB6CGM	34
XB6ECV6JP	11	XB6EDF8B2P	13	ZB6AD04	32	ZB6AW1	23	ZB6CGN	34
XB6ECV8BP	11	XB6EDF8J1P	13	ZB6AD05	32	ZB6AW3	23	ZB6CGP	34
XB6ECV8JP	11	XB6EDF8J2P	13	ZB6AD06	32	ZB6AW4	23	ZB6CGQ	34
XB6ECW1B1P	12	XB6EDG221P	14	ZB6AD07	32	ZB6AW5	23	ZB6CGR	34
XB6ECW1B2P	12	XB6EDG222P	14	ZB6AD08	32	ZB6AW6	23	ZB6CGS	34
XB6ECW1J1P	12	XB6EDG232P	14	ZB6AD22	30	ZB6AW8	23	ZB6CGT	34
XB6ECW1J2P	12	XB6EDV1BP	11	ZB6AD23	30	ZB6AW9	23	ZB6CV0	25
XB6ECW3B1P	12	XB6EDV1JP	11	ZB6AD24	30	ZB6CA0	27	ZB6CV1	25
XB6ECW3B2P	12	XB6EDV3BP	11	ZB6AD25	30	ZB6CA1	27	ZB6CV3	25
XB6ECW3J1P	12	XB6EDV3JP	11	ZB6AD26	30	ZB6CA2	27	ZB6CV4	25
XB6ECW3J2P	12	XB6EDV4BP	11	ZB6AD27	30	ZB6CA3	27	ZB6CV5	25
XB6ECW4B1P	12	XB6EDV4JP	11	ZB6AD28	30	ZB6CA4	27	ZB6CV6	25
XB6ECW4B2P	12	XB6EDV5BP	11	ZB6AD42	30	ZB6CA5	27	ZB6CV8	25
XB6ECW4J1P	12	XB6EDV5JP	11	ZB6AD43	30	ZB6CA6	27	ZB6CV9	25
XB6ECW4J2P	12	XB6EDV6BP	11	ZB6AD44	30	ZB6CA9	27	ZB6CW0	23
XB6ECW5B1P	12	XB6EDV6JP	11	ZB6AD45	30	ZB6CD02	32	ZB6CW1	23
XB6ECW5B2P	12	XB6EDV8BP	11	ZB6AD46	30	ZB6CD03	32	ZB6CW3	23
XB6ECW5J1P	12	XB6EDV8JP	11	ZB6AD47	30	ZB6CD04	32	ZB6CW4	23
XB6ECW5J2P	12	XB6EDW1B1P	12	ZB6AD48	30	ZB6CD05	32	ZB6CW5	23
XB6ECW6B1P	12	XB6EDW1B2P	12	ZB6AE1	23	ZB6CD06	32	ZB6CW6	23
XB6ECW6B2P	12	XB6EDW1J1P	12	ZB6AE3	23	ZB6CD07	32	ZB6CW8	23
XB6ECW6J1P	12	XB6EDW1J2P	12	ZB6AE4	23	ZB6CD08	32	ZB6CW9	23
XB6ECW6J2P	12	XB6EDW3B1P	12	ZB6AE5	23	ZB6CD22	30	ZB6DA0	27
XB6ECW8B1P	12	XB6EDW3B2P	12	ZB6AE6	23	ZB6CD23	30	ZB6DA1	27
XB6ECW8B2P	12	XB6EDW3J1P	12	ZB6AE8	23	ZB6CD24	30	ZB6DA2	27
XB6ECW8J1P	12	XB6EDW3J2P	12	ZB6AE9	23	ZB6CD25	30	ZB6DA3	27
XB6ECW8J2P	12	XB6EDW4B1P	12	ZB6AF0	24	ZB6CD26	30	ZB6DA4	27
XB6EDA11P	10	XB6EDW4B2P	12	ZB6AF1	24	ZB6CD27	30	ZB6DA5	27
XB6EDA12P	10	XB6EDW4J1P	12	ZB6AF3	24	ZB6CD28	30	ZB6DA6	27
XB6EDA21P	10	XB6EDW4J2P	12	ZB6AF4	24	ZB6CD42	30	ZB6DA9	27
XB6EDA22P	10	XB6EDW5B1P	12	ZB6AF5	24	ZB6CD43	30	ZB6DD02	32
XB6EDA31P	10	XB6EDW5B2P	12	ZB6AF6	24	ZB6CD44	30	ZB6DD03	32
XB6EDA32P	10	XB6EDW5J1P	12	ZB6AF8	24	ZB6CD45	30	ZB6DD04	32
XB6EDA41P	10	XB6EDW5J2P	12	ZB6AF9	24	ZB6CD46	30	ZB6DD05	32
XB6EDA42P	10	XB6EDW6B1P	12	ZB6AGA	35	ZB6CD47	30	ZB6DD06	32
								ZB6DD07	32
								ZB6DD08	32
								ZB6DD22	30

# Control and signaling units Ø 16 plastic

## Harmony XB6

### Product reference index

ZB6DD23	30	ZB6E2B	37	ZB6Y2179	42	ZB6YA101	39	ZB6YA441	40
ZB6DD24	30	ZB6E2D	37	ZB6Y2186	42	ZB6YA102	39	ZB6YA626	40
ZB6DD25	30	ZB6E2E	37	ZB6Y2187	43	ZB6YA103	39	ZB6YAA1	38
ZB6DD26	30	ZB6EB1A	37	ZB6Y2190	42	ZB6YA104	39	ZB6YAA2	38
ZB6DD27	30	ZB6EB1B	37	ZB6Y2203	43	ZB6YA105	39	ZB6YAA3	38
ZB6DD28	30	ZB6EB3A	37	ZB6Y2204	43	ZB6YA106	39	ZB6YAA4	38
ZB6DD42	30	ZB6EB3B	37	ZB6Y2205	43	ZB6YA107	39	ZB6YAA5	38
ZB6DD43	30	ZB6EB4A	37	ZB6Y2206	43	ZB6YA108	39	ZB6YAA6	38
ZB6DD44	30	ZB6EB4B	37	ZB6Y2207	43	ZB6YA109	39	ZB6YAE1	38
ZB6DD45	30	ZB6EB5A	37	ZB6Y2208	43	ZB6YA111	39	ZB6YAE3	38
ZB6DD46	30	ZB6EB5B	37	ZB6Y2209	43	ZB6YA112	40	ZB6YAE4	38
ZB6DD47	30	ZB6EB6A	37	ZB6Y2210	43	ZB6YA113	40	ZB6YAE5	38
ZB6DD48	30	ZB6EB6B	37	ZB6Y2211	43	ZB6YA114	40	ZB6YAE6	38
ZB6DE1	23	ZB6EB8A	37	ZB6Y2212	43	ZB6YA115	40	ZB6YAE8	38
ZB6DE3	23	ZB6EB8B	37	ZB6Y2213	43	ZB6YA116	40	ZB6YAV1	38
ZB6DE4	23	ZB6EG0B	37	ZB6Y2214	43	ZB6YA117	40	ZB6YAV3	38
ZB6DE5	23	ZB6EG1B	37	ZB6Y2223	43	ZB6YA118	40	ZB6YAV4	38
ZB6DE6	23	ZB6EG3B	37	ZB6Y2234	43	ZB6YA119	41	ZB6YAV5	38
ZB6DE8	23	ZB6EG4B	37	ZB6Y2287	43	ZB6YA120	41	ZB6YAV6	38
ZB6DE9	23	ZB6EG5B	37	ZB6Y2303	43	ZB6YA121	41	ZB6YAV8	38
ZB6DF0	24	ZB6EG6B	37	ZB6Y2304	43	ZB6YA122	41	ZB6YAW1	38
ZB6DF1	24	ZB6EG8B	37	ZB6Y2305	43	ZB6YA127	41	ZB6YAW3	38
ZB6DF3	24	ZB6EH0A	37	ZB6Y2306	43	ZB6YA128	41	ZB6YAW4	38
ZB6DF4	24	ZB6EH0B	37	ZB6Y2307	43	ZB6YA129	40	ZB6YAW5	38
ZB6DF5	24	ZB6EM0B	37	ZB6Y2308	43	ZB6YA130	41	ZB6YAW6	38
ZB6DF6	24	ZB6EM1B	37	ZB6Y2309	43	ZB6YA131	41	ZB6YAW8	38
ZB6DF8	24	ZB6EM3B	37	ZB6Y2310	43	ZB6YA132	41	ZB6YB028	45
ZB6DF9	24	ZB6EM4B	37	ZB6Y2311	43	ZB6YA133	41	ZB6YC002	45
ZB6DGA	33	ZB6EM5B	37	ZB6Y2312	43	ZB6YA134	41	ZB6YC003	44
ZB6DGB	33	ZB6EM6B	37	ZB6Y2313	43	ZB6YA200	39	ZB6YC013	44
ZB6DGC	33	ZB6EM8B	37	ZB6Y2314	43	ZB6YA201	39	ZB6YC100	39
ZB6DGD	33	ZB6Y001	45	ZB6Y2323	43	ZB6YA202	39	ZB6YC101	39
ZB6DGE	33	ZB6Y002	45	ZB6Y2334	43	ZB6YA203	39	ZB6YC102	39
ZB6DGF	33	ZB6Y003	45	ZB6Y2387	43	ZB6YA204	39	ZB6YC103	39
ZB6DGG	33	ZB6Y004	45	ZB6Y2403	43	ZB6YA205	39	ZB6YC104	39
ZB6DGH	33	ZB6Y005	15	ZB6Y2404	43	ZB6YA206	39	ZB6YC105	39
ZB6DGJ	33		45	ZB6Y2405	43	ZB6YA207	39	ZB6YC106	39
ZB6DGK	33	ZB6Y006	45	ZB6Y2406	43	ZB6YA208	39	ZB6YC107	39
ZB6DGL	33	ZB6Y006A	45	ZB6Y2408	43	ZB6YA209	39	ZB6YC108	39
ZB6DGM	33	ZB6Y007	45	ZB6Y2409	43	ZB6YA210	39	ZB6YC109	39
ZB6DGN	33	ZB6Y008	45	ZB6Y2410	43	ZB6YA212	40	ZB6YC111	39
ZB6DGP	33	ZB6Y009	36	ZB6Y2411	43	ZB6YA213	40	ZB6YC112	40
ZB6DGQ	33	ZB6Y010	45	ZB6Y2412	43	ZB6YA214	40	ZB6YC113	40
ZB6DGR	33	ZB6Y011	36	ZB6Y2413	43	ZB6YA215	40	ZB6YC114	40
ZB6DGS	33	ZB6Y016	45	ZB6Y2414	43	ZB6YA219	41	ZB6YC115	40
ZB6DGT	33	ZB6Y018	45	ZB6Y2423	43	ZB6YA220	41	ZB6YC116	40
ZB6DP2	30	ZB6Y019	45	ZB6Y2434	43	ZB6YA221	41	ZB6YC117	40
ZB6DV0	25	ZB6Y020	45	ZB6Y2900	42	ZB6YA222	40	ZB6YC118	40
ZB6DV1	25	ZB6Y1001	42	ZB6Y3001	42	ZB6YA223	40	ZB6YC119	41
ZB6DV3	25	ZB6Y1900	42	ZB6Y3900	42	ZB6YA224	40	ZB6YC120	41
ZB6DV4	25	ZB6Y2001	42	ZB6Y4001	42	ZB6YA225	40	ZB6YC121	41
ZB6DV5	25	ZB6Y201	45	ZB6Y4900	42	ZB6YA227	41	ZB6YC122	41
ZB6DV6	25	ZB6Y202	45	ZB6Y56	15	ZB6YA228	41	ZB6YC127	41
ZB6DV8	25	ZB6Y203	45	ZB6Y7001	44	ZB6YA229	40	ZB6YC128	41
ZB6DV9	25	ZB6Y2103	43	ZB6Y7130	44	ZB6YA230	41	ZB6YC129	40
ZB6DW0	23	ZB6Y2104	43	ZB6Y7230	44	ZB6YA231	41	ZB6YC130	41
ZB6DW1	23	ZB6Y2105	43	ZB6Y7330	44	ZB6YA232	41	ZB6YC131	41
ZB6DW3	23	ZB6Y2106	43	ZB6Y7430	44	ZB6YA233	41	ZB6YC132	41
ZB6DW4	23	ZB6Y2107	43	ZB6Y7630	44	ZB6YA234	41	ZB6YC133	41
ZB6DW5	23	ZB6Y2108	43	ZB6Y905	15	ZB6YA311	39	ZB6YC134	41
ZB6DW6	23	ZB6Y2109	43		45	ZB6YA316	40	ZB6YC200	39
ZB6DW8	23	ZB6Y2110	43	ZB6Y906	45	ZB6YA317	40	ZB6YC201	39
ZB6DW9	23	ZB6Y2111	43	ZB6YA001	15	ZB6YA318	40	ZB6YC202	39
ZB6E1A	37	ZB6Y2112	43		45	ZB6YA340	40	ZB6YC203	39
ZB6E1B	37	ZB6Y2113	43	ZB6YA002	45	ZB6YA410	39	ZB6YC204	39
ZB6E1D	37	ZB6Y2114	43	ZB6YA003	44	ZB6YA423	40	ZB6YC205	39
ZB6E1E	37	ZB6Y2123	43	ZB6YA006	45	ZB6YA424	40	ZB6YC206	39
ZB6E2A	37	ZB6Y2134	43	ZB6YA013	44	ZB6YA425	40	ZB6YC207	39
		ZB6Y2178	42	ZB6YA100	39				



ZB6YC208	39	ZB6YD106	39	ZB6YD423	40
ZB6YC209	39	ZB6YD107	39	ZB6YD424	40
ZB6YC210	39	ZB6YD108	39	ZB6YD425	40
ZB6YC212	40	ZB6YD109	39	ZB6YD441	40
ZB6YC213	40	ZB6YD111	39	ZB6YD626	40
ZB6YC214	40	ZB6YD112	40	ZB6YDA1	38
ZB6YC215	40	ZB6YD113	40	ZB6YDA2	38
ZB6YC219	41	ZB6YD114	40	ZB6YDA3	38
ZB6YC220	41	ZB6YD115	40	ZB6YDA4	38
ZB6YC221	41	ZB6YD116	40	ZB6YDA5	38
ZB6YC222	41	ZB6YD117	40	ZB6YDA6	38
ZB6YC223	40	ZB6YD118	40	ZB6YDE1	38
ZB6YC224	40	ZB6YD119	41	ZB6YDE3	38
ZB6YC225	40	ZB6YD120	41	ZB6YDE4	38
ZB6YC227	41	ZB6YD121	41	ZB6YDE5	38
ZB6YC228	41	ZB6YD122	41	ZB6YDE6	38
ZB6YC229	40	ZB6YD127	41	ZB6YDE8	38
ZB6YC230	41	ZB6YD128	41	ZB6YDV1	38
ZB6YC231	41	ZB6YD129	40	ZB6YDV3	38
ZB6YC232	41	ZB6YD130	41	ZB6YDV4	38
ZB6YC233	41	ZB6YD131	41	ZB6YDV5	38
ZB6YC234	41	ZB6YD132	41	ZB6YDV6	38
ZB6YC311	39	ZB6YD133	41	ZB6YDV8	38
ZB6YC316	40	ZB6YD134	41	ZB6YDW1	38
ZB6YC317	40	ZB6YD2	32	ZB6YDW3	38
ZB6YC318	40	ZB6YD20	42	ZB6YDW4	38
ZB6YC340	40	ZB6YD200	39	ZB6YDW5	38
ZB6YC410	39	ZB6YD201	39	ZB6YDW6	38
ZB6YC423	40	ZB6YD202	39	ZB6YDW8	38
ZB6YC424	40	ZB6YD203	39	ZB6YF01	15
ZB6YC425	40	ZB6YD204	39	ZB6YF02	15
ZB6YC441	40	ZB6YD205	39	ZB6YF03	15
ZB6YC626	40	ZB6YD206	39	ZB6YF04	15
ZB6YCA1	38	ZB6YD207	39	ZB6YF05	15
ZB6YCA2	38	ZB6YD208	39	ZB6YG095	45
ZB6YCA3	38	ZB6YD209	39	ZB6YJ012	45
ZB6YCA4	38	ZB6YD21	42	ZB6YK1	32
ZB6YCA5	38	ZB6YD210	39	ZB6YK3	32
ZB6YCA6	38	ZB6YD212	40	ZB6YK4	32
ZB6YCE1	38	ZB6YD213	40	ZB6YK5	32
ZB6YCE3	38	ZB6YD214	40	ZB6YK6	32
ZB6YCE4	38	ZB6YD215	40	ZB6YK8	32
ZB6YCE5	38	ZB6YD219	41	ZB6Z1B	36
ZB6YCE6	38	ZB6YD22	42	ZB6Z2B	36
ZB6YCE8	38	ZB6YD220	41	ZB6Z3B	36
ZB6YCV1	38	ZB6YD221	41	ZB6Z4B	36
ZB6YCV3	38	ZB6YD222	41	ZB6Z5B	36
ZB6YCV4	38	ZB6YD223	40	ZB6ZB11B	36
ZB6YCV5	38	ZB6YD224	40	ZB6ZB15B	36
ZB6YCV6	38	ZB6YD225	40	ZB6ZB31B	36
ZB6YCV8	38	ZB6YD227	41	ZB6ZB35B	36
ZB6YCW1	38	ZB6YD228	41	ZB6ZB42B	36
ZB6YCW3	38	ZB6YD229	40	ZB6ZB45B	36
ZB6YCW4	38	ZB6YD230	41	ZB6ZB51B	36
ZB6YCW5	38	ZB6YD231	41	ZB6ZB52B	36
ZB6YCW6	38	ZB6YD232	41	ZB6ZB55B	36
ZB6YCW8	38	ZB6YD233	41	ZB6ZB65B	36
ZB6YD001	15	ZB6YD234	41	ZB6ZH01B	36
	45	ZB6YD30	42	ZB6ZH02B	36
ZB6YD002	45	ZB6YD31	42	ZB6ZH05B	36
ZB6YD003	44	ZB6YD311	39		
ZB6YD013	44	ZB6YD316	40		
ZB6YD100	39	ZB6YD317	40		
ZB6YD101	39	ZB6YD318	40		
ZB6YD102	39	ZB6YD32	42		
ZB6YD103	39	ZB6YD340	40		
ZB6YD104	39	ZB6YD4	32		
ZB6YD105	39	ZB6YD410	39		



# mySchneider, your personalized digital experience

Access an all-in-one customized online experience and benefit from tailored business services, resources, and tools to efficiently support your business operations.

- **Efficiency:** In just a few clicks, find all the information and support you need to get the job done.
- **Simplicity:** Use a single login to access all business services, in one place, available 24/7. You no longer need to log in to multiple platforms.
- **Personalization:** Benefit from content, tools, and business services tailored to your activity, and customize your landing page based on your preferences.

## Watch the How-to Videos



### Order management

- > [Select Products and Add to Cart](#)
- > [Check for Products' Price and Availability](#)
- > [Order Products with Generic Commercial References](#)




### Product information

- > [Find a Product Data Sheet and Related Documents](#)
- > [Select Products and Add to Cart](#)
- > [Stay Up to Date on the Status of My Products](#)



### Support

- > [Get Quicker Answers Thanks to Online Support](#)

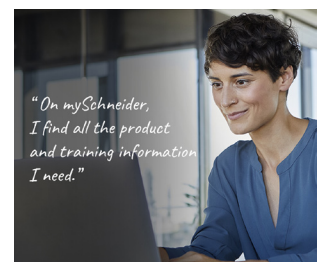

### Training

- > [Access Trainings Dedicated to My Activity](#)

[Create your account](#)

Life Is 

**Schneider**  
Electric

# Legal information

The information provided in this Catalog contains description of Schneider Electric products, solutions and services ("Offer") with technical specifications and technical characteristics of the performance of the corresponding Offer.

The content of this document is subject to revision at any time without notice due to continued progress in methodology, design and manufacturing.

To the extent permitted by applicable law, no responsibility or liability is assumed by Schneider Electric and its subsidiaries for any type of damages arising out of or in connection with (i) informational content of this Catalog not conforming with or exceeding the technical specifications, or (ii) any error contained in this Catalog, or (iii) any use, decision, act or omission made or taken on basis of or in reliance on any information contained or referred to in this Catalog.


SCHNEIDER ELECTRIC MAKES NO WARRANTY OR REPRESENTATION OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO WHETHER THIS CATALOG OR ANY INFORMATION CONTAINED THEREIN SUCH AS PRODUCTS AND SERVICES WILL MEET REQUIREMENTS, EXPECTATIONS OR PURPOSE OF ANY PERSON MAKING USE THEREOF.

Schneider Electric brand and any trademarks of Schneider Electric and its subsidiaries referred to in this Catalog are property of Schneider Electric or its subsidiaries. All other brands are trademarks of their respective owners.

This Catalog and its content are protected under applicable copyright laws and provided for informative use only. No part of this Catalog may be reproduced or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), for any purpose, without the prior written permission of Schneider Electric.

Copyright, intellectual, and all other proprietary rights in the content of this Catalog (including but not limited to software, audio, video, text, and photographs) rests with Schneider Electric or its licensors. All rights in such content not expressly granted herein are reserved. No rights of any kind are licensed or assigned or shall otherwise pass to persons accessing this information.

Life Is On

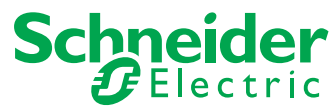

Learn more about our products at [www.se.com](http://www.se.com)

Design: Schneider Electric  
Photos: Schneider Electric

**Schneider Electric Industries SAS**

Head Office  
35, rue Joseph Monier - CS 30323  
F-92500 Rueil-Malmaison Cedex  
France

DIA5ED2130406EN  
March 2024 - V3.0