


02 Recessed Spots Fixed LED>The Dark Light Pro Range Aluminium

10105FD/B/W

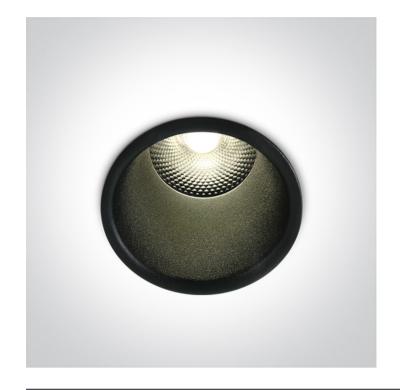

5W COB LED recessed spot, IP20, for general lighting applications.

Supplied with non-dimmable LED driver. Complies with standard EN60598-1 and any other specific standards.













Downloads









Dimensions









Gallery



Physical Specification

Item Group	
Family	
Order Code	
Colour	
Material	
Shape	
Height	

02 Recessed Spots Fix	ed LED
-----------------------	--------

The Dark Light Pro Range Aluminium

10105FD/B/W

Black

Aluminium

Circular

95mm

Diameter	55mm
Cutout Hole Diameter	50mm
Recessed Ceiling	Yes
Depth Required	120mm
Indoor	Yes
Adjustable	No
ectrical Characteristics	
Coor	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	5W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	14,9V
Safety Class	
Power(Watts)	4,5W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

LED Number	1
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	4,2-7,25W
Power Factor	0,9
Constant Current	Yes
300mA	14-24v
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	LIFUD
Illumination Data	
Colour Temperature	3000K
Lumen Output	300lm
Light Efficiency	60lm/W
CRI	80
Beam Angle	
Illumination Diagram	
Dark Light	Yes
Packing Info	
aoking inio	
Box Length	9cm
Box Width	7cm

Pcs/Carton	50	
Barcode	5291889057352	
HS Code	9405409900	
Certification & Warranty		
Warranty	2 Years	
Weee Directive	Yes	

12cm

Box Height