


02 Recessed Spots Fixed LED>The IP65 Bathroom Range

10106V/B/W

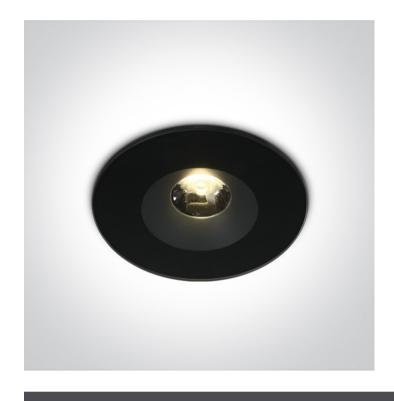

6W Recesed Spot fixed LED, IP65.

Complete with 500mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Gallery



Physical Specification

| 02 Recessed Spots Fixed LED |
|-----------------------------|
| The IP65 Bathroom Range |
| 10106V/B/W |
| Black |
| Die Cast + Glass |
| Circular |
| 81mm |
| |

| Diameter | 110mm |
|----------------------|--------------|
| Cutout Hole Diameter | 94mm |
| Recessed Ceiling | Yes |
| Depth Required | 100mm |
| Indoor | Yes |
| Outdoor | Yes |
| Adjustable | No |
| IK Rating | 8 |
| | Built in |
| Gear | Built In |
| Fitting + Driver | |
| Input Voltage | 100-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class | |
| Power(Watts) | 6W |
| IP Rating | IP65 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark | F |
| | |
| Fitting | |
| | |


| Dimmable | No |
|---------------|------------------|
| F Mark | F |
| | |
| Fitting | |
| Input Type | Constant Current |
| Input Current | 500mA |
| IP Rating | IP65 |
| Light Source | LED built in |
| LED Type | СОВ |
| LED Brand | Cree |
| | |

| Gear | |
|--|------------------------------|
| Gear Type | Led Driver |
| Input Voltage | 100-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 3-6W |
| Power Factor | 0,5 |
| Constant Current | Yes |
| 500mA | 6-12V |
| IP Rating | IP20 |
| Safety Class | |
| Dimmable | No |
| | Plastic |
| Housing Material | |
| Housing Material Brand | Eaglerise |
| | Eaglerise |
| Brand | Eaglerise |
| | Eaglerise |
| Brand | Eaglerise 3000K |
| Brand lumination Data | |
| Brand lumination Data Colour Temperature | 3000K |
| Brand lumination Data Colour Temperature Lumen Output | 3000K 460lm |
| Brand lumination Data Colour Temperature Lumen Output Light Efficiency | 3000K 460lm 76,67lm/W |
| Brand Iumination Data Colour Temperature Lumen Output Light Efficiency CRI | 3000K 460lm 76,67lm/W |
| Brand Lumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle | 3000K 460lm 76,67lm/W |
| Brand Lumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle | 3000K 460lm 76,67lm/W |
| Iumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram | 3000K 460lm 76,67lm/W 80 25° |
| Iumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram | 3000K 460Im 76,67Im/W 80 25° |
| Iumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram | 3000K 460lm 76,67lm/W 80 25° |
| Iumination Data Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram | 3000K 460Im 76,67Im/W 80 25° |

1

LED Number

Energy Label



| Certification & Warranty | |
|--------------------------|---------|
| Warranty | 3 Years |
| Weee Directive | Yes |