



7W COB LED recessed spot IP65.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

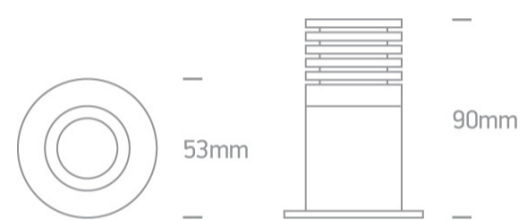

Gallery



Must be ordered separately



89015A

Related items



89015AT

Physical Specification


| | |
|----------------------|-----------------------------|
| Item Group | 02 Recessed Spots Fixed LED |
| Family | The IP65 Project Range |
| Order Code | 10107DL/W/W |
| Colour | White |
| Material | Aluminium |
| Shape | Circular |
| Height | 90mm |
| Diameter | 53mm |
| Cutout Hole Diameter | 42mm |
| Recessed Ceiling | Yes |
| Depth Required | 100mm |
| Indoor | Yes |
| Adjustable | No |

Electrical Characteristics

Fitting

| | |
|---------------|------------------|
| Input Type | Constant Current |
| Input Current | 700mA |
| Safety Class | III |
| Power(Watts) | 7W |
| IP Rating | IP65 |
| Light Source | LED built in |
| LED Type | COB |

| |
|--------------|
| LED Brand |
| Cable Length |
| F Mark |

| |
|---|
| Bridgelux |
| 40cm |
|  |

Illumination Data

| |
|----------------------|
| Colour Temperature |
| Lumen Output |
| Light Efficiency |
| CRI |
| Beam Angle |
| Illumination Diagram |
| Dark Light |

| |
|--|
| 3000K |
| 550lm |
| 78,57lm/W |
| 90 |
| 38° |
|  |
| Yes |

Packing Info

| |
|------------|
| Box Length |
| Box Width |
| Box Height |
| Box Weight |
| Pcs/Carton |
| Barcode |
| HS Code |

| |
|---------------|
| 6,5cm |
| 6,5cm |
| 9,5cm |
| 0,189kg |
| 50 |
| 5291889048756 |
| 9405409900 |

Certification & Warranty

Warranty

5 Years

Weee Directive

Yes
