


This drawing is copyright. No part of this work may be copied, reproduced, altered or amended, stored in a retrieval system, or transmitted in any form or by any means without the prior permission in writing of the copyright owner.

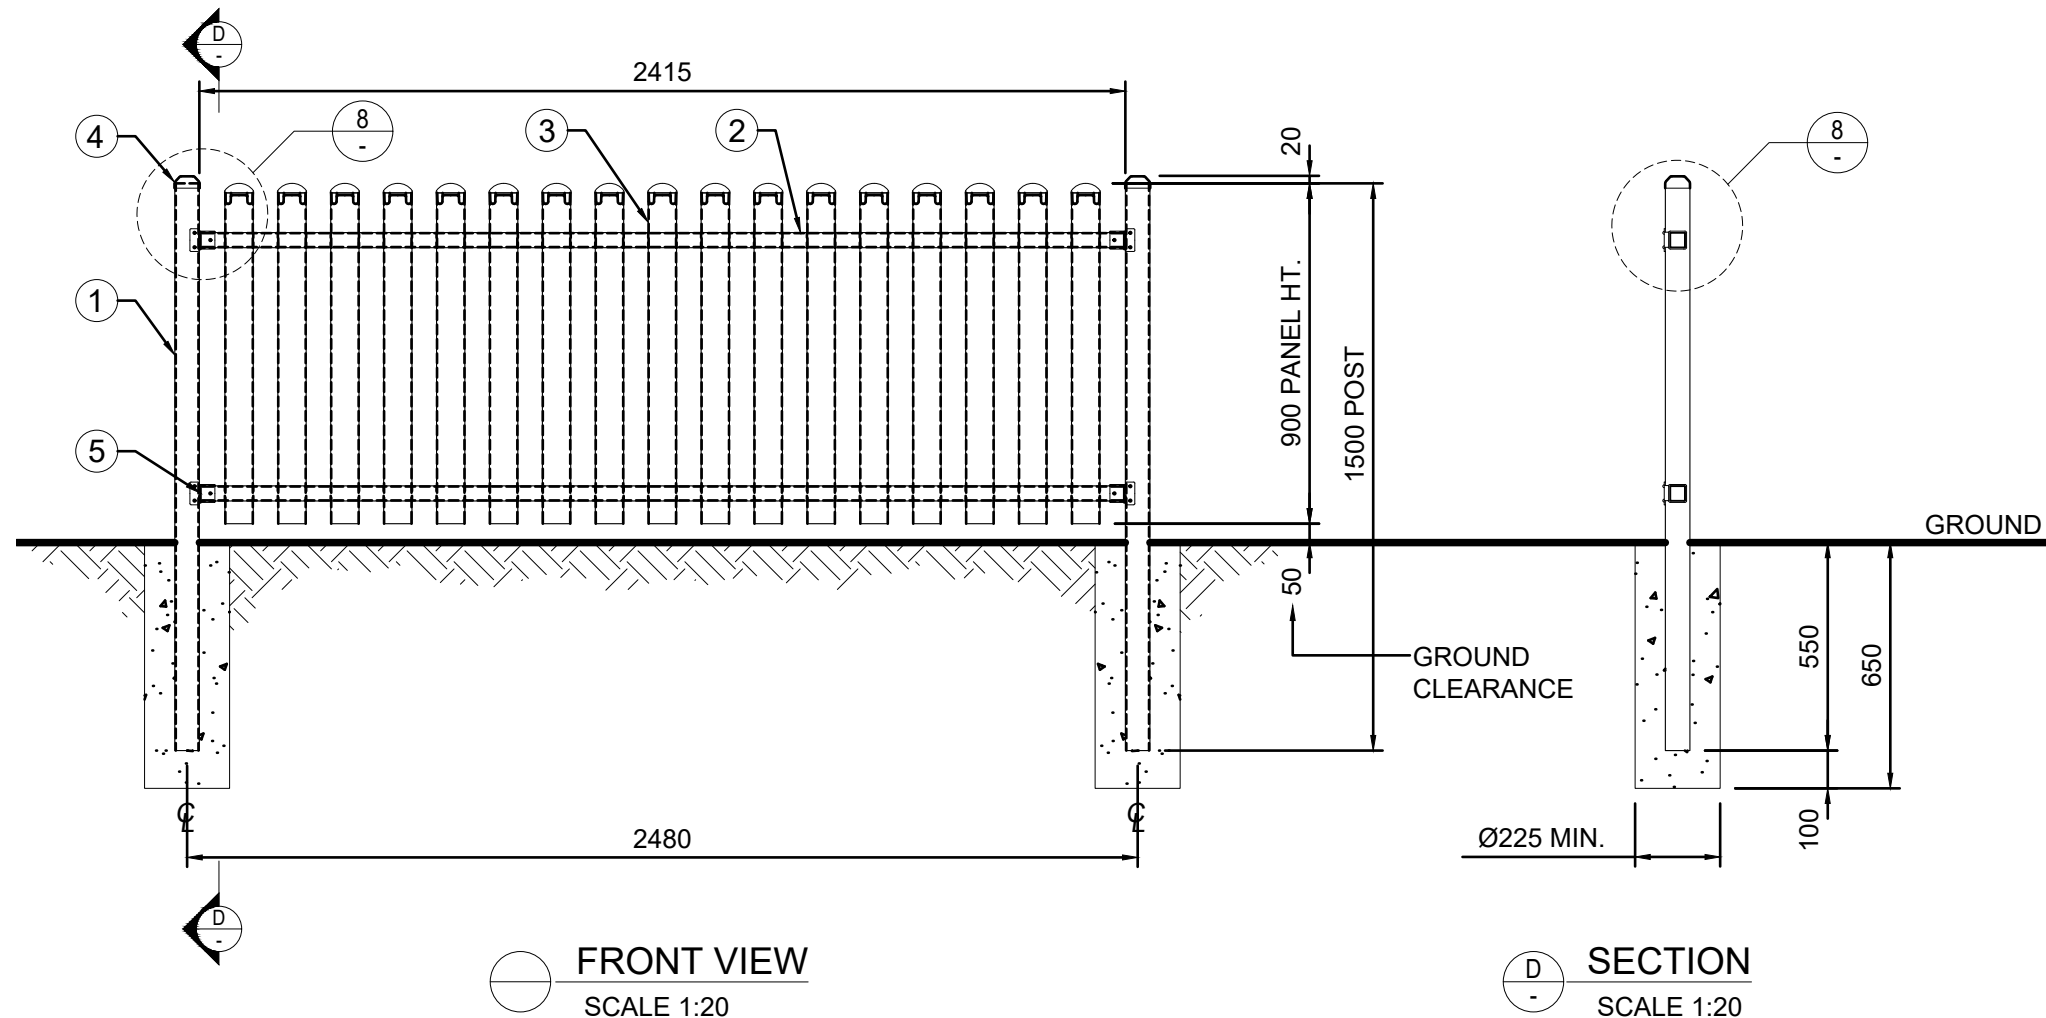

### GENERAL NOTES

1. TUBE MADE FROM PREMIUM GALVABOND® TUBE FROM ORRCON OR EQUIVALENT.
2. STEEL TUBE TO COMPLY WITH AS1450 DESIGNATION C250 MINIMUM.
3. STEEL TUBE TO HAVE A ZINC COATING MASS OF 137 G/M<sup>2</sup> INSIDE AND OUTSIDE OF TUBE.
4. ALL WELDS TO BE SILICON BRONZE.
5. POWDER COATING TO COMPLY WITH AS4506 CLASSIFICATION 2 (SUBJECT TO SITE CONDITIONS).
6. CONCRETE FOOTINGS 20MPA MINIMUM.
7. FOOTING SIZE RECOMMENDED (SUBJECT TO SITE SOIL CONDITIONS).
8. TAKE CARE TO REMOVE ALL METAL SWARF WHEN INSTALLING SCREWS.

### BILL OF MATERIALS

DESCR.	DESCR.	QTY.	SPEC.
1	POST	2	65 x 65 x 1.6mm SHS x 1500mm LG
2	RAIL	2	40 x 40 x 1.6mm SHS x 2435mm LG
3	RAIL PICKET	17	75 x 16 x 1.0mm x 900mm LG SPEAR MOON
4	POST CAP	2	65 x 65 STEEL CAP
5	RAIL BRACKET	4	ONE PIECE SECURITY BRACKET
6	SCREW	12	ANTI-TAMPER SELF DRILLING TEK SCREW 12g x 25mm LG

C	GENERAL REVISION	SPH	17.08.23
B	GENERAL REVISIONS	JH	09.09.16
A	GENERAL REVISIONS	AC	06.08.11
AMDT	DESCRIPTION	BY	DATE

**BLUEDOG FENCES AUSTRALIA**  
ph. (02) 6755 6444  
f. (02) 6762 2311  
bluedogfences.com.au

DRAWN	J.H.	09-09-16	JOB No.	© Bluedog Fences Australia Pty Ltd.
REVIEWED	L.W.	17-08-23	APPROVAL STATUS	HEADINGLY® STEEL PICKET FENCE SYSTEM "SPEAR MOON" 900mm HIGH PEARL WHITE PANEL ASSEMBLY
APPROVED	S.B.	09-09-16	cad	
SCALE: 1:20, 1:5	@ A3	DO NOT AMEND MANUALLY	A3	60F-75 x 16-MOO - 03 C
			CODE	SHEET
			AMDT	