


This drawing is copyright. No part of this work may be copied, reproduced, altered or amended, stored in a retrieval system, or transmitted in any form or by any means without the prior permission in writing of the copyright owner.

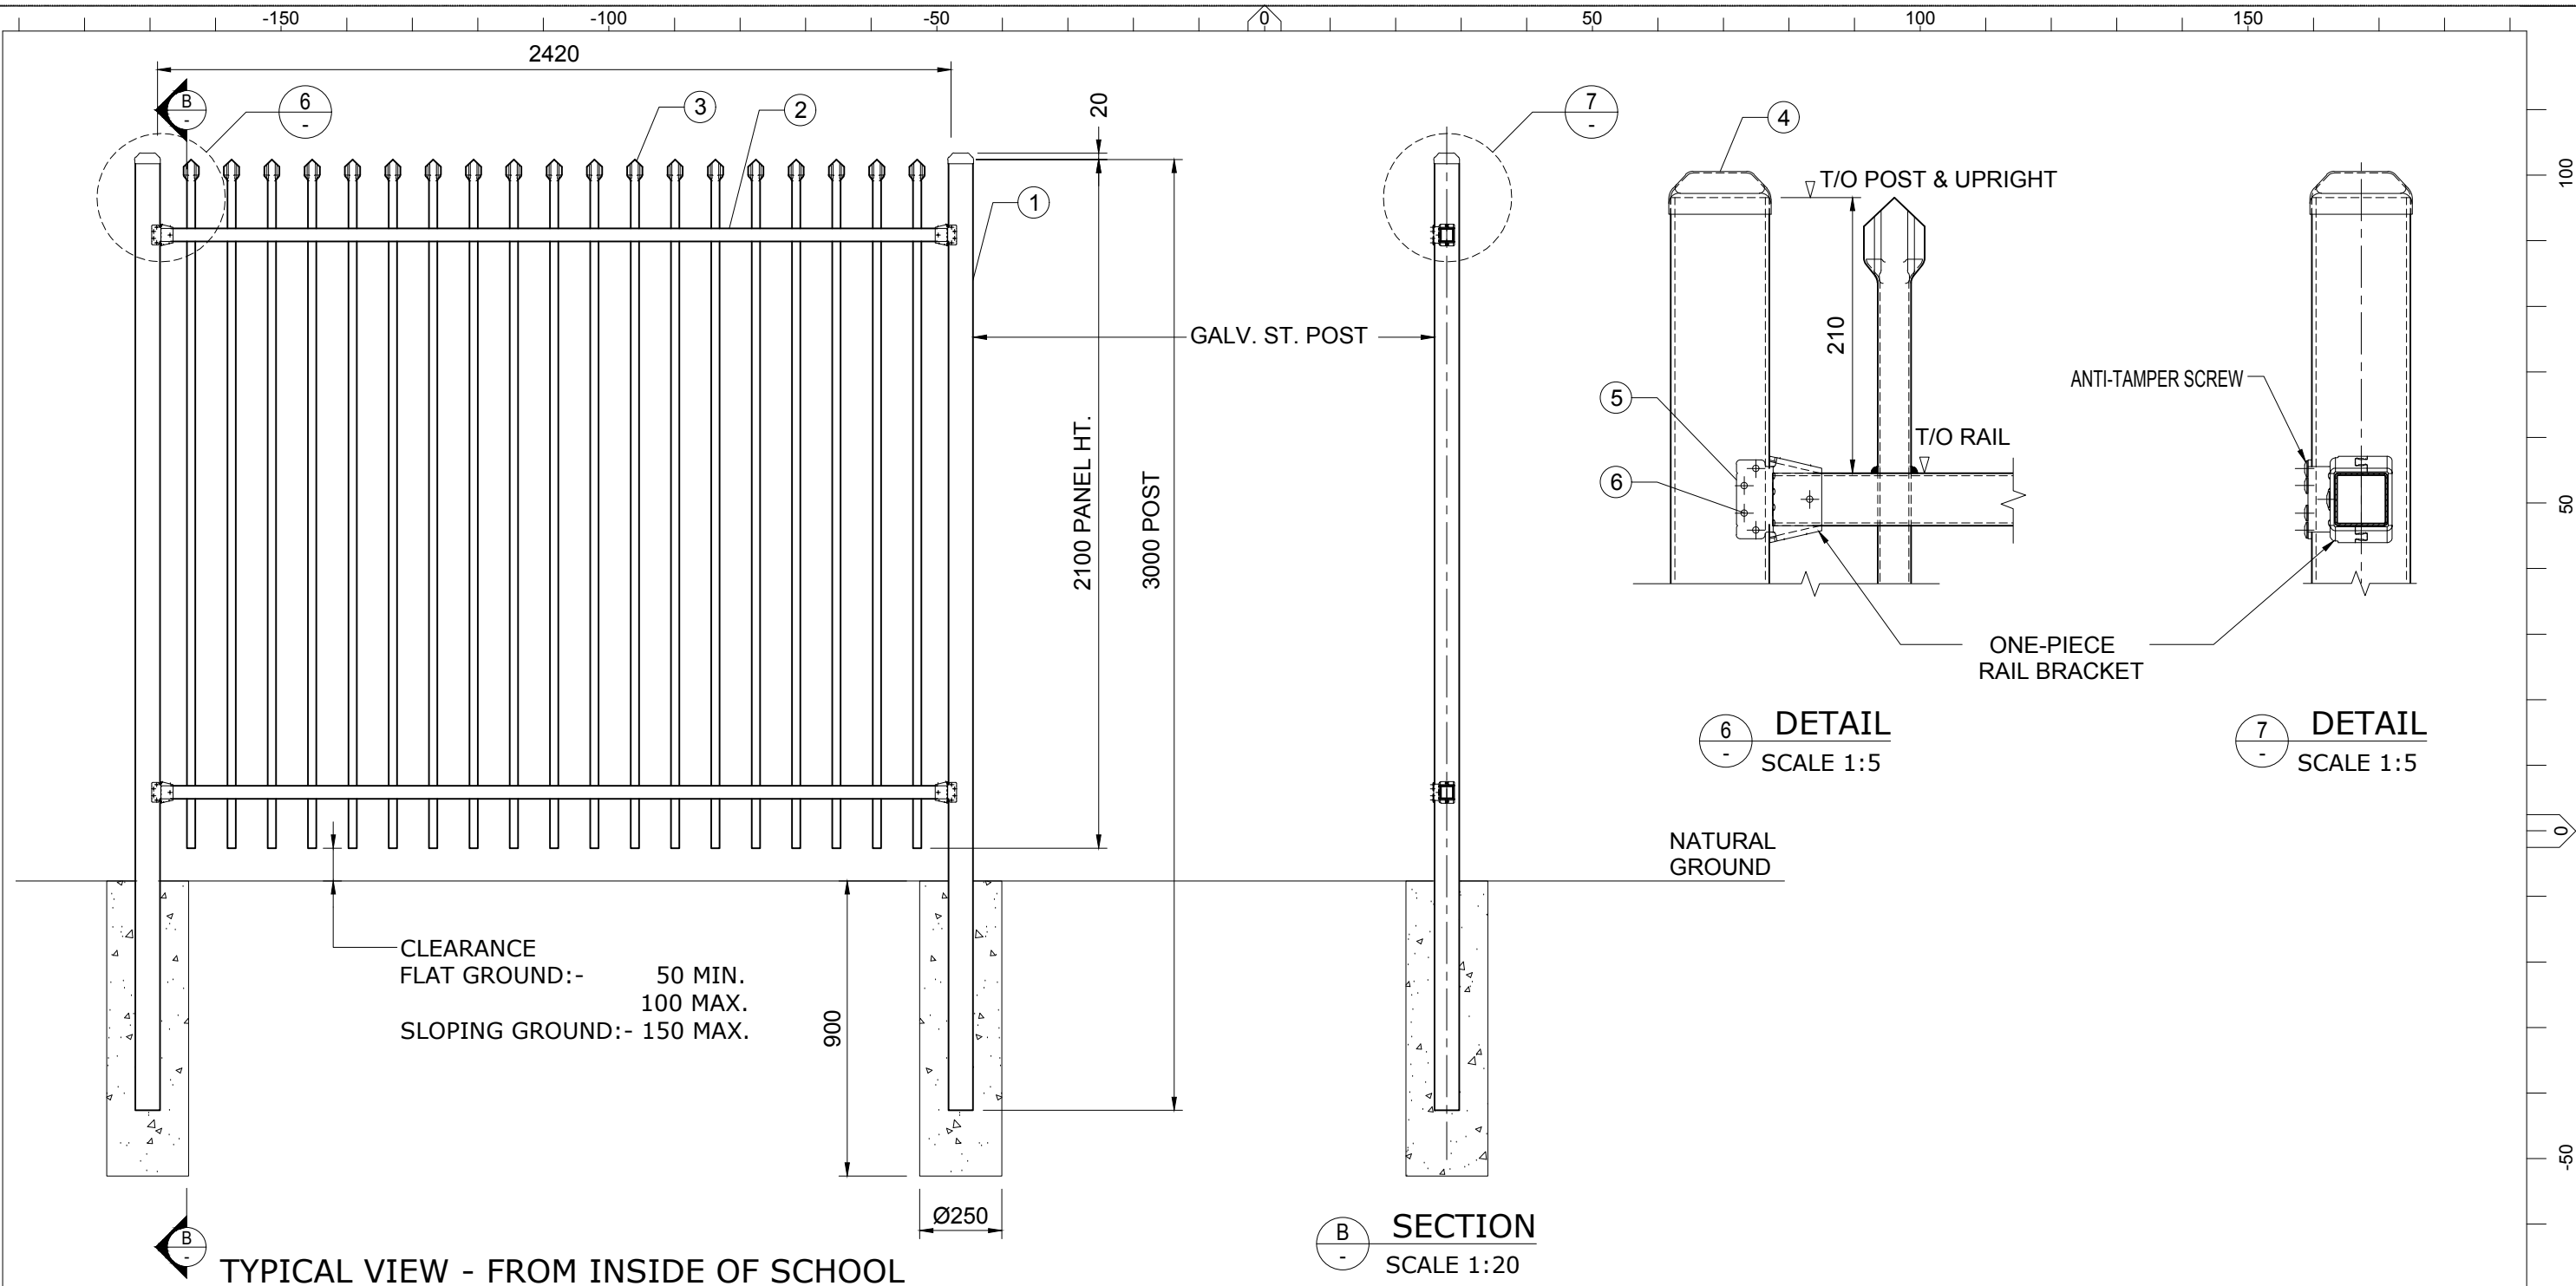

### GENERAL NOTES

1. TUBE MADE FROM PREMIUM GALVABOND® TUBE FROM ORRCON OR EQUIVALENT.
2. STEEL TUBE TO COMPLY WITH AS1450 DESIGNATION C250 MINIMUM.
3. STEEL TUBE TO HAVE A ZINC COATING MASS OF 137 G/M<sup>2</sup> INSIDE AND OUTSIDE OF TUBE.
4. ALL WELDS TO BE SILICON BRONZE.
5. POWDER COATING TO COMPLY WITH AS4506 CLASSIFICATION 2 (SUBJECT TO SITE CONDITIONS).
6. SCREWS TO INSIDE OF FENCE UNLESS BRACKET RESTRICTED.
7. CONCRETE FOOTINGS 20MPa MINIMUM.
8. FOOTING SIZE RECOMMENDED (SUBJECT TO SITE SOIL CONDITIONS).

### BILL OF MATERIALS

ITEM	DESCR.	QTY.	SPEC.
1	POST	2	75 x 75 x 3.0mm SHS x 2400mm LG
2	RAIL	2	40 x 40 x 2.0mm SHS x 2400mm LG
3	PICKET	19	25 x 25 x 1.6mm x 2100mm LG CRUSHED SPEAR
4	POST CAP	2	75 x 75 STEEL CAP
5	RAIL BRACKET	4	ONE PIECE SECURITY BRACKET
6	SCREW	12	ANTI-TAMPER SELF DRILLING TEK SCREW 12gx25mm LG

**BLUEDOG  
FENCES**  
AUSTRALIA  
ph. (02) 6755 6444  
f. (02) 6762 2311  
bluedogfences.com.au

DRAWN	J.H.	11-03-17	Job No. 8684	© Bluedog Fences Australia Pty Ltd.		
REVIEWED	S.B.	11-03-17	APPROVAL STATUS	SECURATOP® - DETA QLD PANEL TYPICAL ASSEMBLY 2100 HT. x 2400 LTH.		
APPROVED	S.B.	11-03-17		A3 35-25x25-DETA-QLD -02 B		
SCALE: 1:20, 1:5 @ A3			DO NOT AMEND MANUALLY			AMDT

B	GENERAL REVISED	JH	11.03.17
A	GENERAL REVISED	JH	08.12.16
AMDT	DESCRIPTION	BY	DATE
279x385			