



10W LED recessed downlight, IP20. Ideal for general lighting applications.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions



## Gallery



## Physical Specification

Item Group

06 Downlights Fixed LED

Family

The COB Downlight Range Die Cast

Order Code

10110CA/W/C

Colour

White

Material

Die Cast

Shape



Circular


Height

65mm

Diameter	120mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	100mm
Indoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	30V
Safety Class	
Power(Watts)	9W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Epistar

## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

7,5-12,6W

Power Factor

0,9

Constant Current

Yes

300mA

25-42V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

45°C

Operating Temp

85°C

Housing Material

Plastic

Output Terminal

Cable

Manufacturer

Lifud

Protection

Short Circuit and Overload

## Illumination Data

Colour Temperature

4000K

Lumen Output

850lm

Light Efficiency

85lm/W

CRI

80

Beam Angle

60°


Illumination Diagram



## Packing Info

Box Length	13,5cm
Box Width	7,5cm
Box Height	13,5cm
Box Weight	0,39Kg
Pcs/Carton	50
Barcode	5291889051985
HS Code	9405409900

## Energy Label

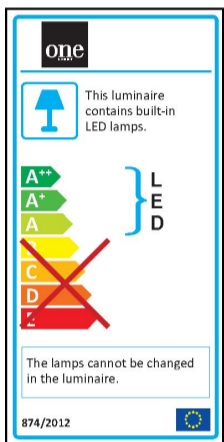

## Certification & Warranty

Warranty	2 Years
Average Lifetime	30000hrs
Weee Directive	Yes