
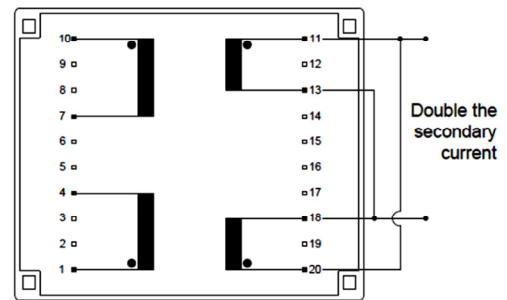
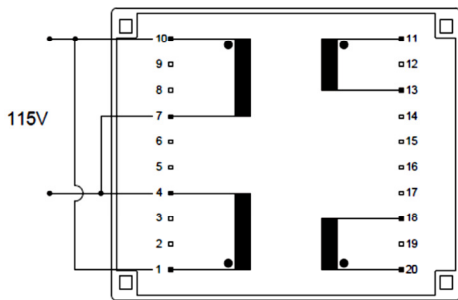
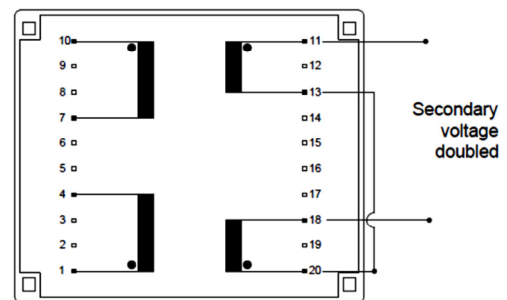


Connection scheme (bottom view):

10 VA - 30 VA

Primary possible connections


Secondary possible connections

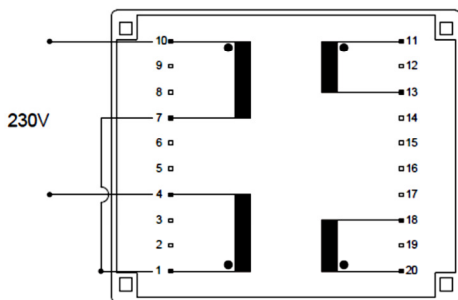

Dimensions:

Power [VA]	Dimensions			Fixing holes		Pins		Weight [kg]
	L1 [mm]	W [mm]	H [mm]	A [mm]	B [mm]	R [mm]	No.	
4	53	44	23	47.5	37.5	35	2x8	0.15
6	53	44	23	47.5	37.5	35	2x8	0.185
10	68	57	25	62.5	50	45	2x10	0.260
18	68	57	27	62.5	50	45	2x10	0.385
24	68	57	31	62.5	50	45	2x10	0.45
30	68	57	35	62.5	50	45	2x10	0.53

Dimensions:

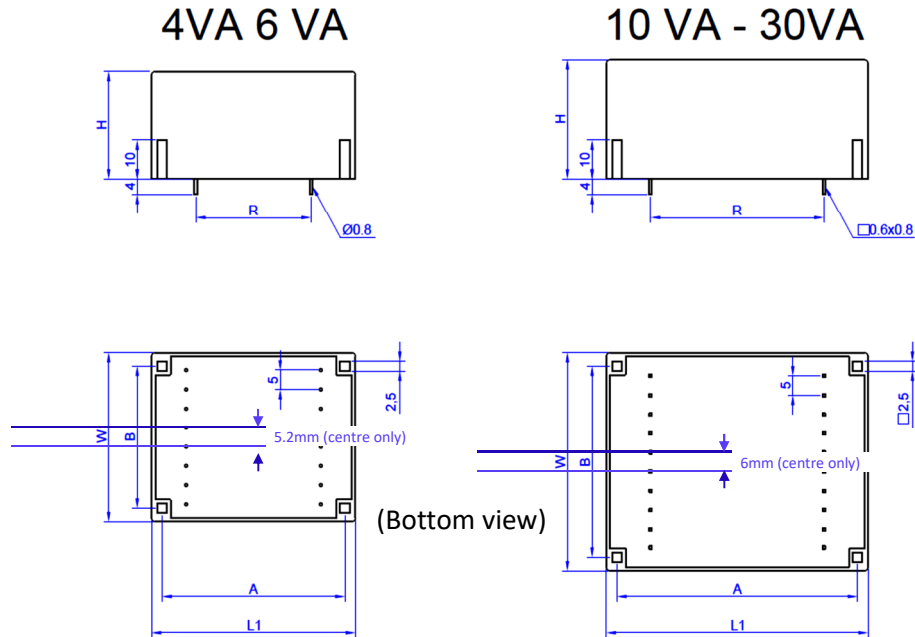

Ordering information:

RS Stock number	Power VA	Specification	Primary [V]	Secondary voltage [V]	Secondary current [mA]	No-load voltage +/--10%
1213835	4	Transformer Low Profile PCB 4VA 2x6V	2x115	2x6	333.3	2 x 9.4
1213836	4	Transformer Low Profile PCB 4VA 2x9V	2x115	2x9	222.2	2 x 14
1213837	4	Transformer Low Profile PCB 4VA 2x18V	2x115	2x18	111.1	2 x 28
1213839	6	Transformer Low Profile PCB 6VA 2x6V	2x115	2x6	500.0	2 x 8.1
1213840	6	Transformer Low Profile PCB 6VA 2x9V	2x115	2x9	333.3	2 x 12.1
1213841	6	Transformer Low Profile PCB 6VA 2x12V	2x115	2x12	250.0	2 x 16.2
1213842	6	Transformer Low Profile PCB 6VA 2x15V	2x115	2x15	200.0	2 x 20.2
1213846	10	Transformer Low Profile PCB 10VA 2x9V	2x115	2x9	555.5	2 x 12.9
1213849	10	Transformer Low Profile PCB 10VA 2x12V	2x115	2x12	416.6	2 x 16.4
1213850	18	Transformer Low Profile PCB 18VA 2x12V	2x115	2x12	750.0	2 x 14.7
1213851	18	Transformer Low Profile PCB 18VA 2x18V	2x115	2x18	500.0	2 x 22.5
1213854	24	Transformer Low Profile PCB 24VA 2x9V	2x115	2x9	1333.3	2 x 10.6
1213852	24	Transformer Low Profile PCB 24VA 2x12V	2x115	2x12	1000.0	2 x 16.0
1213858	30	Transformer Low Profile PCB 30VA 2x9V	2x115	2x9	1666.6	2 x 11.2
1213855	30	Transformer Low Profile PCB 30VA 2x12V	2x115	2x12	1250.0	2 x 15.2
1213856	30	Transformer Low Profile PCB 30VA 2x15V	2x115	2x15	1000.0	2 x 18.5
1213857	30	Transformer Low Profile PCB 30VA 2x18V	2x115	2x18	833.3	2 x 20.2