

10W COB LED recessed spot, IP20, for general lighting applications.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

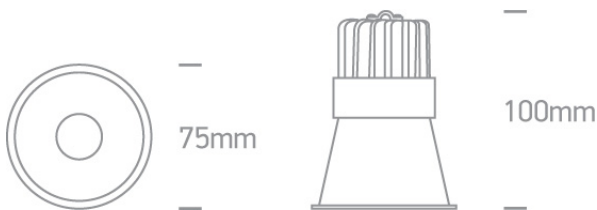

Gallery



Physical Specification



Item Group	02 Recessed Spots Fixed LED		
Family	The Dark Light Pro Range Aluminium		
Order Code	10110FD/B/W		
Colour	Black		
Material	Aluminium		
Shape	Circular		
Height	100mm		

Diameter
Cutout Hole Diameter
Recessed Ceiling
Depth Required
Indoor
Adjustable


75mm
68mm
Yes
130mm
Yes
No



Electrical Characteristics

Gear
Fitting + Driver
Input Voltage
50 Hz
60 Hz
Safety Class
Power(Watts)
IP Rating
Light Source
Dimmable
F Mark


External-Included
220-240V
Yes
Yes

10W
IP20
LED built in
No


Fitting
Input Type
Input Current
Voltage
Safety Class
Power(Watts)
IP Rating
Light Source
LED Type
LED Brand

Constant Current
300mA
30V

9W
IP20
LED built in
COB
Epistar

LED Number	1
F Mark	
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7,5-12,6W
Power Factor	0,9
Constant Current	Yes
300mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	LIFUD

Illumination Data

Colour Temperature	3000K
Lumen Output	800lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	24°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	11cm
Box Width	9cm

Box Height	12cm
Pcs/Carton	50
Barcode	5291889057376
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes