


2 Channel Digital Storage Oscilloscopes

multicomp PRO

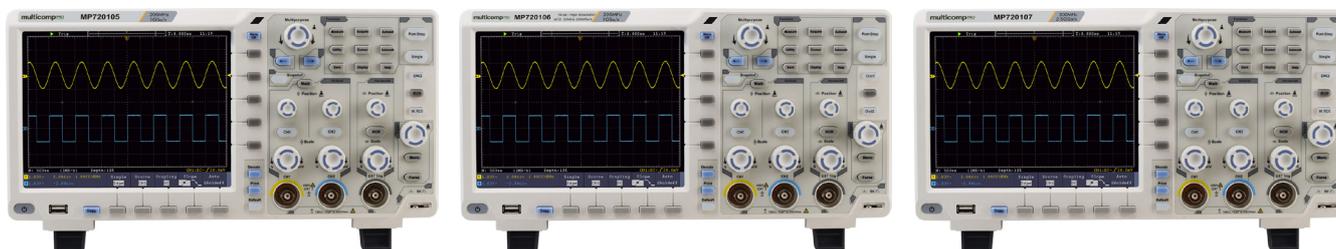

Performance Specifications

Characteristics	MP720105 / MP720105 US	MP720106 / MP720106 US	MP720107 / MP720107 US
Bandwidth	200MHz	200MHz	300MHz
Sample Rate	1GS/s	1GS/s (8 bits) 500MS/s (12 bits) 100MS/s (14 bits)	2.5GS/s
Vertical Resolution (A/D)	8 bits	14 bits	8 bits
Record Length	40M		
Waveform Refresh Rate	75,000 wfms/s		
Horizontal Scale (s/div)	1ns/div - 1000	1ns/div - 1000	1ns/div - 1000
	Step by 1 - 2 - 5		
Rise Time (at Input, Typical)	≤1.7ns		≤1.17ns
Channel	2 + 1 (external)		
Display	8" Colour LCD, 800 × 600 pixels		
Input Impedance	1MΩ ± 2%, in parallel with 15pF ±5pF	50Ω ±2%, in parallel with 15pF ±5pF	
Channel Isolation	50Hz : 100 : 1, 10MHz : 40 : 1		
Max. Input Voltage	1MΩ ≤ 300Vrms; 50Ω ≤ 5Vrms		
DC Gain Accuracy	±3%	±1.5%	±3%
DC Accuracy	Average ≥16: ±(3% reading + 0.05 div) for ΔV		
Probe Attenuation Factor	0.001X - 1000X, Step by 1 - 2 - 5		
LF Respond (AC, -3dB)	≥10Hz (at input, AC coupling, -3dB)		
Sample Rate / Relay Time Accuracy	±1ppm		
Interpolation	sin(x) / x		
Interval (ΔT) Accuracy (full bandwidth)	Single: ±(1 interval time + 1ppm x reading + 0.6ns); Average > 16: ±(1 interval time + 1ppm x reading + 0.4ns)		
Input Coupling	DC, AC, and GND		
Vertical Sensitivity	1mV/div to 10V/div (at input)		
Trigger Type	Edge, Video, Pulse, Slope, Runt, Windows, Time Out, Nth Edge, Logic, I2C, SPI, RS232, and CAN		
Bus Decoding	I2C, SPI, RS232, and CAN		
Trigger Mode	Auto, Normal, and Single		
Vertical Range	±2V (1mV/div - 50mV/div), ±20V (100mV/div - 1V/div), ±200V (2V/div - 10V/div)		

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

2 Channel Digital Storage Oscilloscopes

multicomp PRO

Line / Field Frequency (video)	NTSC, PAL and SECAM Standard	
Cursor Measurement	ΔV , and ΔT between cursors, ΔV and ΔT between cursors, and auto- cursors	
Automatic Measurement	Vpp, Vavg, Vrms, Freq, Period, Peak RMS, Cursor RMS, Vmax, Vmin, Vtop, Vbase, Vamp, Overshoot, Phase, Preshoot, Rise Time, Fall Time, +Width, -Width, +Duty, -Duty, Duty Cycle, Delay A→B ↑, Delay A→B ↓, +Pulse Count, -Pulse Count, Rise Edge Count, Fall Edge Count	
Waveform Math	+, -, ×, ÷, FFT, FFTrms, Intg, Diff, Sqrt, User Defined Function, digital filter (low pass, high pass, band pass, band reject)	
Waveform Storage	100 waveforms	
Lissajou's Figure	Bandwidth	Full Bandwidth
	Phase Difference	±3 degrees
Communication Interface	USB host, USB device, USB port for PictBridge, Trig Out (P/F), LAN, and VGA (MP720106 and MP720107I)	
Frequency Counter	Available	
Power Consumption	<15W	
Fuse	2A, T class, 250V	
Battery (optional)	3.7V, 13200mAh	
Power Supply	100V AC to 240V AC, 50/60Hz, CAT II	
Dimension (W × H × D)	340mm × 177mm × 90mm	
Weight	2.6kg ±200g	

Multimeter (MP720106 only) Specifications

Full Scale Reading	3-3/4 digits (max 4000 count)
Input Impedance	10M Ω
Capacitance	51.2nF - 100 μ F: $\pm(3\% \pm 3 \text{ digits})$
Voltage	V DC: 400mV, 4V, 400V: $\pm(1 \pm 1 \text{ digit})$; Max. input: DC 1000V V AC: 4V, 40V, 400V: $\pm(1 \pm 3 \text{ digits})$; frequency: 40Hz - 400Hz; Max input: AC 400V (virtual value)
Current	DC: 40mA, 400mA: $\pm(1.5\% \pm 1 \text{ digit})$; 10A: $\pm(3\% \pm 3 \text{ digits})$ AC: 40mA: $\pm(1.5\% \pm 3 \text{ digits})$, 400mA: $\pm(2\% \pm 1 \text{ digit})$, 10A: $\pm(3\% \pm 3 \text{ digits})$
Impedance	400 Ω : $\pm(1\% \pm 3 \text{ digits})$, 4K Ω - 40M Ω : $\pm(1\% \pm 1 \text{ digit})$
Diode	<50 (± 30) beeping
Continuity Test	0V to 1V

Arb Waveform Generator Specifications (MP720106 only)

Max. Frequency Output	25MHz
Sample Rate	125MS/s
Channel	Available in 1-ch, or 2-ch
Vertical Resolution	14 bits
Amplitude Range	2mVpp - 6Vpp
Waveform Length	8K
Standard Waveform	Sine, Square, Pulse, Ramp

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

2 Channel Digital Storage Oscilloscopes

multicomp PRO

VGA	VGA+AV (MP720106 and MP720107)
TOU	Touch screen (capacitor-type) (MP720106 and MP720107)
WIF	WiFi (MP720106)
AWG	ARB waveform generator (MP720106)
DMM	Digital Multimeter (MP720106)

Decoding Kit Included

MP720105, MP720106 and MP720107


RS232	RS232
SPI	SPI
I2C	I ² C
CAN	CAN trigger / decoding

Accessories Included : Power Cord, USB cable, Probes, Probe Adjust Tool, CD-Rom and Manual
Power Cord Plug Type : UK/EU, US
Standard Warranty : 12 Months

2 Channel Digital Storage Oscilloscopes

Polymer Lithium-ion Battery

Battery Specification Table

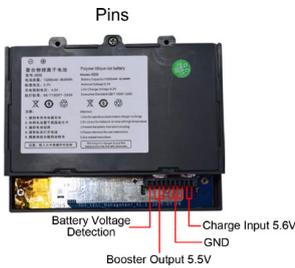

Characteristics	Item	Values
Li Battery	Capacity	13200mAh 48.84Wh
	Nominal Voltage	3.7V
	Limited Charge Voltage	4.2V
Protective Circuit	Charge Voltage	≤4.2V
	Charge Current	≤3A
	Discharge Voltage	2.8V ≤ Voltage ≤ 4.2V
	Discharge Current	≤7A
Charging Management	Charge Voltage Input Range	4.2V to 10V
	Rated Charge Voltage	5.6V
Battery Booster	Rated Output Voltage	5.5V ± 2%
	Output Voltage Ripple (20MHz)	≤100mVpp
	Output Current	≤4A
System	Charging Time	8 hours approximately
	Discharging Time	3.5 hours approximately
Operating Temperature	Charging Temperature	0°C to +45°C
	Discharging Temperature	-20°C to +60°C
	Storage Temperature	-10°C to +45°C
Dimension	119.2mm × 97.2mm × 25.7mm (L × W × T)	
Weight	371.9g	

Part Number Table

Description	Part Number
Dual Channel Digital Storage Oscilloscope, 200MHz, 8-bits	MP720105
Dual Channel Digital Storage Oscilloscope, 200MHz, 14-bits	MP720106
Dual Channel Digital Storage Oscilloscope, 300MHz, 8-bits	MP720107
Polymer Lithium-ion Battery for Oscilloscopes (MP720105, MP720106 & MP720107)	MP720417
Dual Channel Digital Storage Oscilloscope, 200MHz, 8-bits	MP720105 US
Dual Channel Digital Storage Oscilloscope, 200MHz, 14-bits	MP720106 US
Dual Channel Digital Storage Oscilloscope, 300MHz, 8-bits	MP720107 US
Polymer Lithium-ion Battery for Oscilloscopes (MP720105, MP720106 & MP720107)	MP720417 US

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.