

Zener Diode 56V

multicomp^{PRO}

RoHS
Compliant



Features

- Withstands large surge stresses
- High surge current rating
- Halogen free
- Case: SMB molded plastic
- Molding compound, UL flammability classification rating 94V-0
- Polarity: Color band denotes cathode end

Maximum Ratings (@TA = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Power dissipation at TL = 75°C	Ptot	3	W
Forward voltage @IF = 200mA	VF	1.5	V
Typical thermal resistance	RθJL	25	°C/W
	RθJA	226	
Junction temperature	TJ	-50 ~ +150	°C
Storage temperature range	TSTG	-50 ~ +150	

Electrical Characteristics (@TA = 25°C unless otherwise specified)

Device Marking Code	Zener Voltage	Test Current	Dynamic Impedance	Knee Current	Knee Impedance	Reverse Current	Reverse Voltage	Max. DC Current
	VZ	IzT	ZzT	IzK	ZzK	IR(Max.)	VR	IzM
	V	mA	Ω	mA	Ω	μA dc	V	mA
943B	56	6.7	86	0.25	1300	1	42.6	26

Notes:

No suffix indicates a $\pm 20\%$ tolerance on nominal Vz. Suffix A denotes a $\pm 10\%$ tolerance, B denotes a $\pm 5\%$ tolerance, C denotes a $\pm 2\%$ tolerance, and D denotes a $\pm 1\%$ tolerance.

Zener voltage (Vz) is measured at TL=30°C. Voltage measurement to be performed 90 seconds after application of DC current. The zener impedance is derived from the 60Hz AC voltage, which results when an ac current having an rms value equal to 10% of the dc zener current(IzT or IzK) is superimposed on IzT or IzK.

Ratings and Characteristic Curves (@TA=25°C unless otherwise noted)

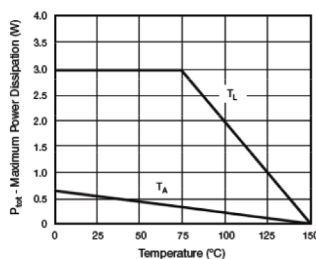


Fig. 1 - Steady State Power Durlating

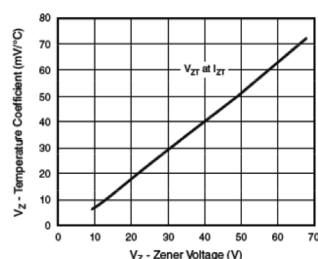


Fig. 3 - Typical Temperature Coefficients

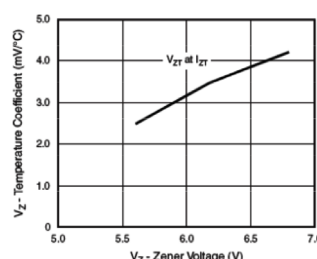


Fig. 2 - Typical Temperature Coefficients

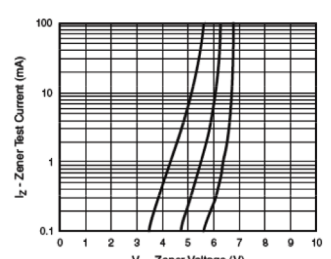



Fig. 4 - Typical Zener Voltage

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro


multicomp^{PRO}

Zener Diode 56V

Diagram

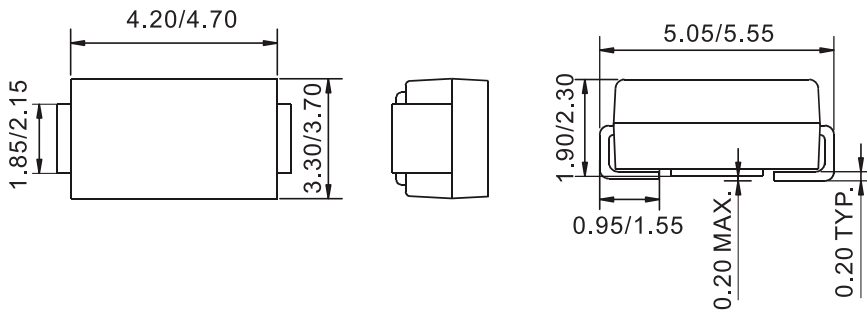

Mounting Pad Layout

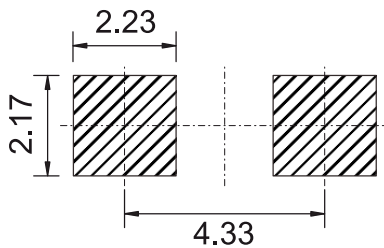

Part Number Table

Description	Part Number
Zener Diode, 56V	SMBJ5943B

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro