



12W COB LED recessed spot, IP65, for general application. Suitable for bathroom installation.

Requires 700mA constant current driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

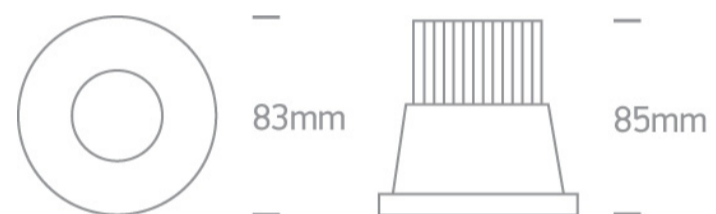

Gallery



Must be ordered separately



89015A

Related items




89015AT

Physical Specification


| | |
|----------------------|-----------------------------|
| Item Group | 02 Recessed Spots Fixed LED |
| Family | The 12W COB IP65 Range |
| Order Code | 10112P/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Circular |
| Height | 85mm |
| Diameter | 83mm |
| Cutout Hole Diameter | 70mm |
| Recessed Ceiling | Yes |
| Depth Required | 105mm |
| Indoor | Yes |
| Outdoor | Yes |
| Adjustable | No |

Electrical Characteristics

| | |
|---------------|------------------|
| Fitting | |
| Input Type | Constant Current |
| Input Current | 700mA |
| Voltage | 18V |
| Safety Class | III |
| Power(Watts) | 12W |
| IP Rating | IP65 |

| | |
|--------------|---|
| Light Source | LED built in |
| LED Type | COB |
| LED Brand | Bridgelux |
| Cable Length | 40cm |
| F Mark |  |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 1100lm |
| Light Efficiency | 91,67lm/W |
| CRI | 90 |
| Beam Angle | 40° |
| Illumination Diagram |  |
| Dark Light | Yes |

Packing Info

| | |
|------------|---------------|
| Box Length | 9cm |
| Box Width | 9cm |
| Box Height | 10cm |
| Box Weight | 0,326kg |
| Pcs/Carton | 50 |
| Barcode | 5291889034919 |
| HS Code | 9405409900 |

Warranty

5 Years

Weee Directive

Yes
