



APPLICATION GUIDE
Telephone and Data Outlet

CAT. NO.

E8432TDRJ/5

E8432TDRJS/5

E8432TDRJ/6

E8432TDRJS/6

E8431RJS4

E8432RJS4

ZENcelo

Thank you for choosing **Schneider Electric** ZENcelo Telephone and Data Outlet. To ensure proper application of our product, please read through the following information before installation and use.

This application guide applies to the following products.



Cat.no.	Description
E8432TDRJ/5	2 Gang Telephone + Data Outlet Category 5e with Integrated Shutter

E8432TDRJ/6	2 Gang Telephone + Data Outlet Category 6 with Integrated Shutter
-------------	----------------------------------------------------------------------



E8432TDRJ/5	2 Gang Telephone + Data Outlet Category 5e on Shuttered Wall Plate
-------------	-----------------------------------------------------------------------

E8432TDRJ/6	2 Gang Telephone + Data Outlet Category 6 on Shuttered Wall Plate
-------------	----------------------------------------------------------------------



E8431RJ4	1 Gang Telephone Socket on Shuttered Wall Plate
----------	----------------------------------------------------



E8432RJS4

2 Gang Telephone Socket on
Shuttered Wall Plate

SPECIFICATIONS

Dimension	:87mm x 87mm
Mounting Centre	:60.3mm (wall box with 35mm depth or above)
Compliance	:ASTMD4566-98, TIA/EIA-568-B.2-1


CATS TRANSMISSION PERFORMANCE

Return Loss	: \geq 23.0db
-------------	-----------------

IMPORTANT NOTE

Please check your local wiring regulations before installation.

WIRING DIAGRAMS

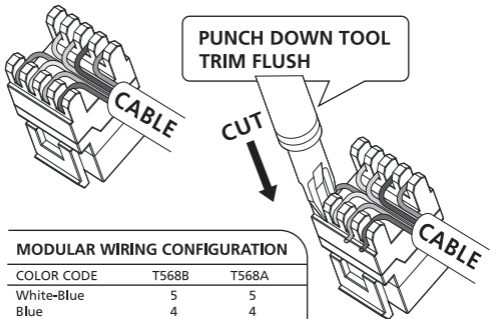


MODULAR WIRING CONFIGURATION

COLOR CODE	T568B	T568A
White-Blue	5	5
Blue	4	4
White-Orange	1	3
Orange	2	6
White-Green	3	1
Green	6	2
White-brown	7	7
Brown	8	8

MOUNTING INSTRUCTION

Please refer to the following diagram for proper installation.



Remarks: For surround mounting, align the clip locks on the faceplate and press firm on the surround. Complete engagement of the clip locks is indicated by a clear "click" sound.

