

APPLICATION GUIDE TruGlobal Socket (v.2)

CAT. NO.
E84426_16TS

ZENcelo

MS18598

Thank you for choosing **Schneider Electric** ZENcelo TruGlobal Socket. To ensure proper application of our product, please read through the following information before installation and use.

This application guide applies to the following products.



Cat. no.
E84426_16TS


Description
16A 1 Gang TruGlobal Socket with Shutter (v.2)

SPECIFICATIONS


| | |
|--------------------|------------------------------|
| Voltage/Frequency | :250V, 50Hz |
| Load Type & Rating | :Resistive load 16A |
| Dimension | :87mm(L) x 87mm(W) x 28mm(H) |
| Mounting Centre | :60.3mm |
| Compliance | :IEC60884-1 |

MOUNTING INSTRUCTION

1. Connect the wires to the terminals (recommend to leave 10-12mm bare metal wire) and tighten the terminal screws.
2. Screw the grid plate onto the wall box.
3. Snap the faceplate onto the grid plate.

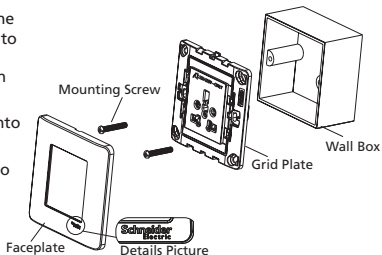

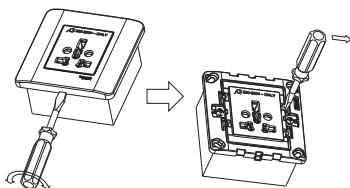



















Insert a screwdriver into the clip lock, and twist the screwdriver to remove the faceplate.



IMPORTANT NOTE

1. The socket doesn't provide with earth connection for Type E(France), Type F (Schuko) plugs.
2. Rated 110V American type(A,B) plugs can not be inserted into the rated 250V socket.
3. Live pins of Type J(Switzerland) plug is accessible when the plug is partially inserted.
4. Live /Neutral polarity is reversed for Type B(Thailand), Type H (Israel), Type I (Argentina) plugs.
5. For type B plug, the temperature rise test of L & E and N & E is not conduct. (May not be comply to IEC60884-1)
6. For type G plug, the temperature rise test of L & N does not comply with IEC 60884-1, which comply with BS 1363 requirement
7. Do not use the product in hot and excessively steamy locations.

| Plug Type | Corresponding Insertion | Rating | Countries |
|---|---|----------------|---|
| A  |  | 10A 250V | China |
| B  |  | 10/16A 250V | Thailand Philippines Vietnam |
| C  |  | 2.5A 250V | Denmark, Finland Czech Republic France, Germany Italy, Poland Portugal |
| E  |  | 16A 250V | France, Slovakia Belgium, Vietnam Morocco, Poland |
| F  |  | 10/16A 250V | Denmark, Belize Finland, Sweden Norway, Portugal Italy, Indonesia South Korea |
| G  |  | 13A 250V | United Kingdom Hong Kong SAR Singapore Malaysia |
| H  |  | 16A 250V | Israel |
| I  |  | 10A 250V | Australia New Zealand China Argentina |
| J  |  | 10A 250V | Switzerland |
| L  |  | 10A 250V | Italy |

WIRING DIAGRAMS

