



Datasheet

RS PRO R/L Analogue to Digital TOSLINK Audio or Coaxial Converter, Black

Stock number: 2299941


EN

The RS PRO analogue audio to digital TOSLINK or coaxial converter has a black metal shell.


The inputs available are left and right RCA to TOSLINK and coaxial which the converts outputs. It supports sampling rate at 48 KHz.

This converter could be used with a TV with analogue left and right out to a sound bar with RCA TOSLINK audio input.


Back Panel:



Upper Panel:

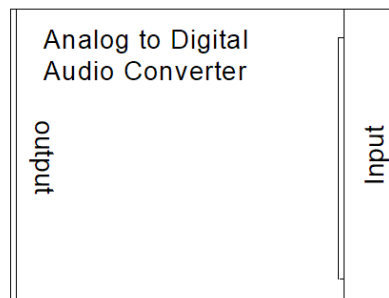

Front Panel:



Signal Inputs/Output	
Input Audio	Stereo R/L
Output Audio	LPCM
Connector	
Input audio connector	2XRCA (R/L)
Output audio connector	Toslink, 1XRCA(Coaxial)
Audio Connector	Toslink Audio and Digital Audio
Operating Frequency	
Sampling rate	48KHz
Mechanical	
Size(L-W-H)	50X40X35MM
Weight (Net)	78g
Warranty	
Limited Warranty	1 Year Parts and Labor
Environmental	
Operating Temperature	0 °C to +45°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 90 % RH (no condensation)

RoHS / REACH / CE

rspro.com