



Project Name _____ Qty _____

Type _____ Catalog / Part Number _____

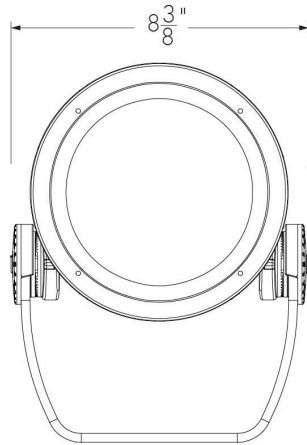

Front view

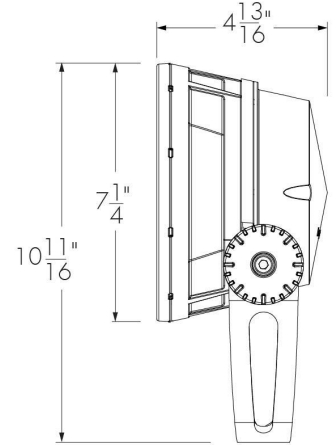

Side view

Photometric Summary

Symmetric

	Delivered output (lm)	Intensity (peak cd)
XN (3°)	2,381	331,811
VN (6°)	1,888	99,894
NS (10°)	2,714	38,895
NF (20°)	2,567	24,613
M (30°)	2,490	13,855
FL (40°)	2,252	5,837
WFL (60°)	2,020	1,520

Asymmetric

NAS	1,726	28,602 (@2.5°)
WW	2,363	3,940 (@5°)

Based on 4000K configuration.
Photometric performance is measured in compliance with IESNA LM 79-08.

Description

The Lumenbeam Medium is an IP66-rated luminaire for lighting landscapes, trees, columns, monuments, and architectural details. It has numerous options, including optics for flood or accent lighting, a choice of color temperatures and colors, as well as various accessories, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.


Features

Color and Color Temperature	2200K, 2700K, 3000K, 3500K, 4000K, 5700K, Red, Green, Blue
Optics (Nominal Distribution)	Extra Narrow 3°, VN (6°), NS (10°), NF (20°), M (30°), FL (40°), WFL (60°), NAS (Narrow Asymmetric), WW (Asymmetric Wallwash)
Optical Option	Linear Spread Lens Horizontal Distribution, Linear Spread Lens Vertical Distribution
Option	Short Yoke 3G ANSI C136.31-2010 Vibration Rating for bridge applications Corrosion-resistant Coating for Hostile Environments
Cable Color	Black, White
Power Consumption	28 W
Warranty	5-year limited warranty

Performance

Maximum Delivered Output	2,714 lm (4000K, NS 10°)
Maximum Delivered Intensity	331,811 cd at nadir (4000K, XN 3°)
Illuminance at Distance	Minimum 1 fc at 578 ft (4000K, XN 3°)
Color Consistency	3 SDCM
Color Rendering	Minimum CRI 80

Optic



Extra Narrow 3° Very Narrow 6° Narrow Spot 10° Narrow Flood 20°



Medium 30° Flood 40° Wide Flood 60° Narrow Asymmetric




Asymmetric Wallwash

Color and Color Temperature



Control



Ratings

IP66 IK09

Certifications



Lumen Maintenance

L70 > 250,000 hrs (Ta 25 °C) (> 80,000 hrs for XN 3°, VN 6°, NAS optics only)

Physical

Housing Material Low copper content high pressure die-cast aluminum

Yoke Material Heavy aluminum (standard yoke included)

Lens Material Clear tempered glass

Hardware Material Stainless steel

Gasket Material Silicone

Surface Finish Electrostatically applied polyester powder coat

Weight 6.7 lbs

EPA Front = 0.44 sq ft, Side = 0.18 sq ft

Electrical and Control

Voltage 100 to 277 volts

Fixture Cable Power and data in one cable

Conductors 3C #16-3 (NO control), 5C #16-5 (DIM, DALI control), 6C #14-3/#24-3 (DMX/RDM control)

Control On/Off control, 0-10V Dimming, DALI dimming, DMX/RDM enabled, Lumentalk system is enabled with LDB accessory - see typical wiring diagrams for details

Resolution (DMX/RDM) Per fixture, 8-bit or 16-bit

Environmental

Storage Temperature -40 °F to 158 °F (device must reach start-up temperature value before operating)

Start-up Temperature -13 °F to 122 °F

Operating Temperature -40 °F to 122 °F

Ingress Protection Rating IP66, Wet location rated

Impact Resistance Rating IK09

Application Wind Speed Luminaires were designed based on AASHTO 2013 standard to ensure highest quality and safety. Installation should be validated by a local project engineer to ensure the luminaires are suitable for the wind speed and exposure of the specific application

Accessories (Order Separately)

Optical Accessories Lumenbeam Medium Snoot, Lumenbeam Medium Snoot wide, Lumenbeam Medium Visor, Lumenbeam Medium Linear spread lens adjustable, Lumenbeam Medium Wire guard

Control Boxes DMX/RDM enabled (daisy chain or star configuration), Ethernet enabled (daisy chain or star configuration), Lumentalk Data Bridge


Control Systems Lumentone™ 2 (LTN2), Pharos® kit (PHAROS)

Diagnostic and Addressing Tools LumenID (LID), LumentalkID (LIDLT)


Chromaticity Data

TM-30 - 4000K

CCT	CIE		TM-30	
	R _a	R _g	R _f	R _o
4000K	83	1.4	85	96




Spectral Power Distribution

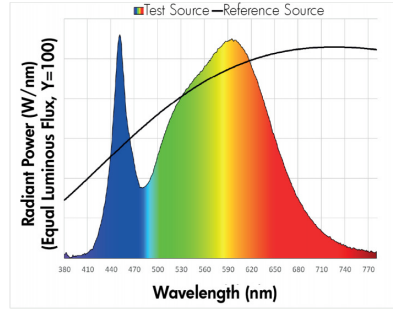


Mounting Options

SY - Short Yoke




Front view




Side view

Mounting Details


Mounting Hole Pattern - Standard And Short Yoke



Adjustable Pivot Limits

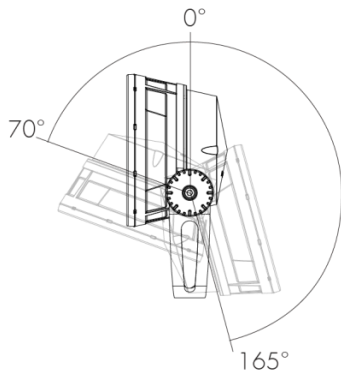

Standard yoke

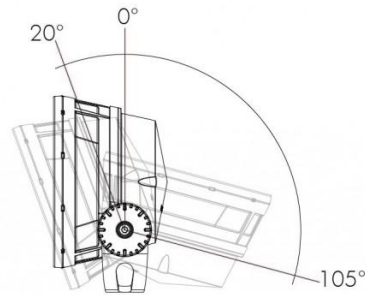

Short yoke


Optical Options

LSLH - Linear Spread Lens Horizontal Distribution



LSLH - Linear spread lens horizontal distribution

LSLV - Linear Spread Lens Vertical Distribution



Beam Angles

Optic installed in fixture	Beam angle with LSLH/LSLV
XN	5° x 60°
VN	7° x 60°
NS	13° x 66°
NF	16° x 62°
M	23° x 65°
FL	33° x 70°


LLF: 0.88*

*LLF may vary slightly by distribution chosen.


Factory installed, not adjustable on site. Not available for WFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).

Mounting Accessories (Order Separately)


Round Pole Mounting Accessory

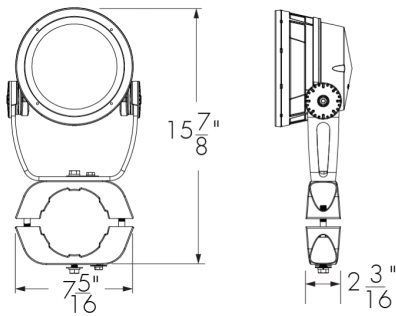

PM4 model shown.
Consult factory for square pole section.



PM4-1, PM4.5-1, PM5-1 - Round pole mounting accessory - single fixture




PM4-2, PM4.5-2, PM5-2 - Round pole mounting accessory - twin fixtures
*One bracket assembly is supplied per 2 fixtures unless otherwise specified.

	PM4	PM4.5	PM5
For pole Ø	4" ± 1/16"	4.5" ± 1/16"	5" ± 1/16"


Consult factory for other pole diameters.

PLTU - Universal Yoke

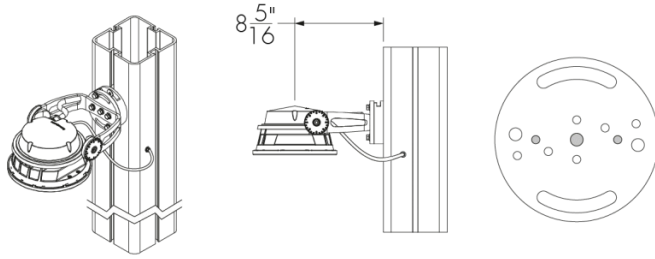


Refer to the Universal Yoke specification sheet and Pole installation instructions for more details. Square Lumentech profile shown. The mounting holes used for this fixture are shown in gray.

SK - Stake Mounting

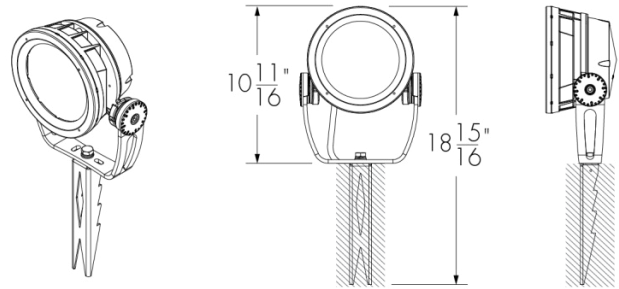


Tenon Adapter

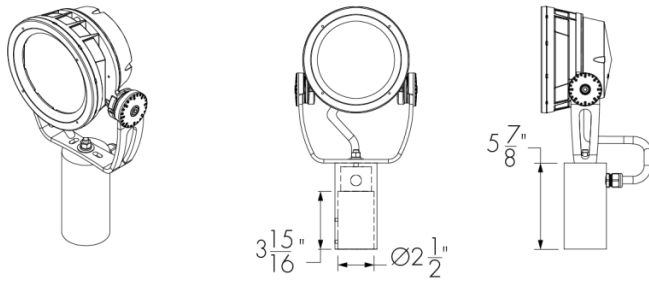

TN2 - Tenon adapter to fit on 2 3/8 in O.D. tenon

Vertical mounting only. Consult factory for horizontal mounting.

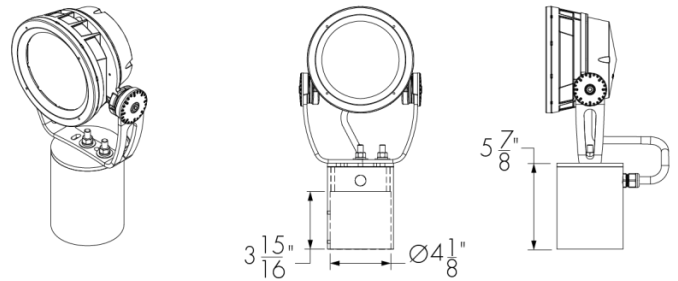



TN4 - Tenon adapter to fit on 4 in O.D. tenon

Vertical mounting only. Consult factory for horizontal mounting.

Optical Accessories (Order Separately)

Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.



SN - Snoot



LBMSN-FINISH-BK-OPTIONS (CRC)

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.



VS - Visor



LBMVS-FINISH-BK-OPTIONS (CRC)

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.



WG - Wire Guard



LBMWG-FINISH-OPTIONS (CRC)

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.



SNW - Snoot Wide



LBMSNW-FINISH-BK-OPTIONS (CRC)

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

LSLA - Linear Spread Lens Adjustable



LBMLSLA-FINISH-OPTIONS (CRC)

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

Accessory Combinations

+	Snoot	Snoot wide	Visor
Linear spread lens adjustable	LBMSNLSLA	N/A*	LBMVLSLA
Wire guard	LBMSN WG	N/A	LBMVSWG


Accessory combinations must be ordered together on a single line.

Ex: A snoot + wire guard combination order code is LBMSN WG-FINISH-BK-OPTIONS. A maximum of two accessories can be combined per fixture.

*Consult factory for a linear spread lens adjustable + snoot wide combination.


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147671

Diffuser Lens 2 (2 Notches)




147672

Diffuser Lens 3 (3 Notches)




147673

Diffuser Lens 4 (4 Notches)




147674

Diffuser Lens 5 (5 Notches)



147675

Diffuser Lens 6 (6 Notches)



147676

Final Distribution Using Diffuser Lenses

Original Distribution on Fixture	Final Distribution Using Diffuser Lens					
	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS				
VN (6°)	NS		NF	M	FL	WFL
NS (10°)						
NF (20°)						
M (30°)				FL	WFL	
FL (40°)						
WFL (60°)						

Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LBS**: LBALK-S **LBM/LBMP**: LBALK-M **LBL/LBLP**: LBALK-L **LBG/LBGP**: LBALK-G **LBX/LBXP**: LBALK-X.


The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LBS**: LBLSLA-FINISH-LBALK **LBM/LBMP**: LBMLSLA-FINISH-LBALK **LBL/LBLP**: LBLLSLA-FINISH-LBALK **LBG/LBGP**: LBGLSLA-FINISH-LBALK **LBX/LBXP**: LBXLSLA-FINISH-LBALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

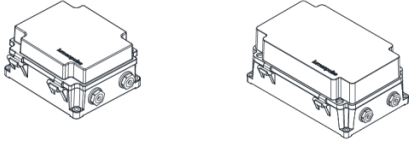


DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for daisy chain configuration, 6x for star configuration), consult factory to order spares.

CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

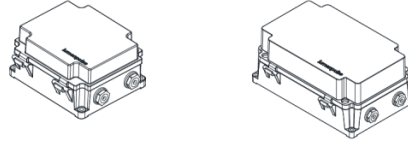

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.

LDB - Lumentalk Data Bridge



Lumentalk Data Bridge, 0-10V or DMX output. Consult LDB specification sheet for details.

Control Systems (Order Separately)

LTN2 - Lumentone™ 2



Lumentone 2 is a simple pre-programmed DMX 512 controller with a push button rotary dial and live feedback.

PHAROS - Pharos® Kit



The Pharos kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations. 2 DMX universes kit shown.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID







LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.

LID-LT - LumentalkID



LumentalkID is a diagnostic and addressing tool. It must be specified for all Lumentalk (LT) applications. Consult LID-LT specification sheet for details.

EPA Guide


	LBM 	LBM with snoot 	LBM with visor 	LBM with snoot wide 
EPA front (sq ft)	0.437	0.437	0.437	0.578
EPA side (sq ft)	0.178	0.317	0.317	0.301

Typical Wiring Diagrams

Wiring Color Code


UL Color Code	USE
Green	Ground
Black	Line
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -
Gray	Signal common (DMX/RDM only)

On/Off Control (NO)

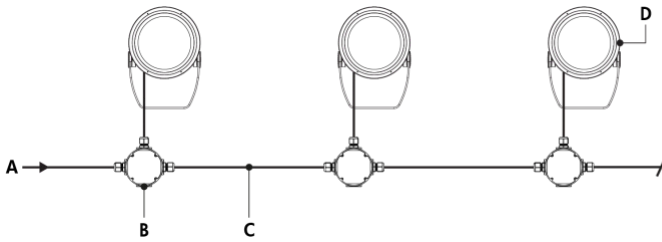

- A** - Power input (100-277V AC, wiring by others)
- B** - Junction box (by others)
- C** - Power wiring (by others)
- D** - Lumenbeam Medium


On/Off Control (NO) - Wiring Detail



- A** - Power input or from previous fixture
- B** - To fixture
- C** - To next fixture
- D** - Line
- E** - Ground
- F** - Line/Neutral
- G** - Wire-nut (by others)
- H** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 28 watts per fixture.

Lumentalk (LT)

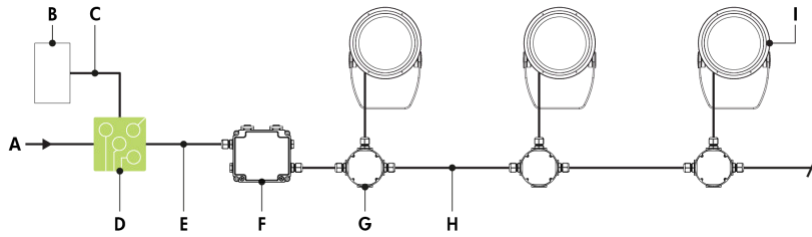

- A** - Power input (100-277V AC, wiring by others)
- B** - Dimmer/controller (order separately from Lumenpulse, or by others)
- C** - Data wiring (by others)
- D** - Lumentranslator 2 (LTL2-DIM, -DMX, -TRIAC, -DALI)
- E** - Power wiring (by others)
- F** - Lumentalk Data Bridge (LDB-DIM or LDB-DMX)
- G** - Junction box (by others)
- H** - Power and data wiring (by others)
- I** - Lumenbeam Medium


Lumentalk (LT) - Wiring Detail Using LDB



- A** - From Lumentalk Data Bridge (control over power line via Lumentalk system) or from previous fixture
- B** - To fixture
- C** - 0-10 V + / Data +
- D** - 0-10 V - / Data -
- E** - To next fixture
- F** - Line
- G** - Ground
- H** - Line/Neutral
- I** - Wire-nut (by others)
- J** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk Data Bridge required for Lumentalk system, see LDB installation instructions for details.
- For applications with all fixtures controlled as 1 zone: fixtures and Lumentalk Data Bridge must be specified as DIM. Maximum of 10 fixtures per LDB-DIM, consult factory for applications that require additional capabilities.
- For applications with fixtures controlled individually: fixtures and Lumentalk Data Bridge must be specified as DMX, 2-step commissioning process: 1 - DMX/RDM system using LumenID software and a LID, 2 - Lumentalk system using LumentalkID software and a LID-LT. Maximum of 32 fixtures per LDB-DMX. Consult factory for details.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- Consult factory for DALI Lumentalk applications.
- 1% minimum dimming value.
- 28 watts per fixture.

0-10V Dimming (DIM)

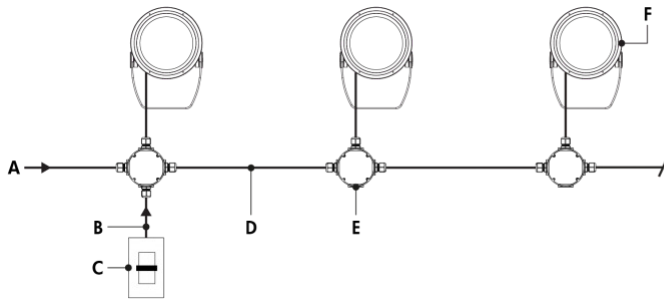

- A** - Power input (100-277V AC, wiring by others)
- B** - Data wiring (by others)
- C** - Dimmer (by others)
- D** - Power and data wiring (by others)
- E** - Junction box (by others)
- F** - Lumenbeam Medium


0-10V Dimming (DIM) - Wiring Detail



- A** - Power input or from previous fixture
- B** - To fixture
- C** - 0-10 V +
- D** - 0-10 V -
- E** - To next fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Wire-nut (by others)
- J** - From dimmer (by others)
- K** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 0-10V mA ratings: passive dimmer (Current Sink): 3mA per fixture, active dimmer (Current Source): 0.5mA per fixture.
- 1% minimum dimming value.
- 28 watts per fixture.

DALI Dimming (DALI)

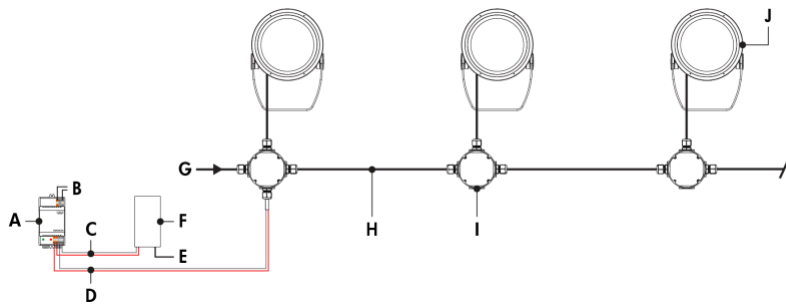

- A** - DALI bus power supply (by others)
- B** - Power input for DALI bus power supply (wiring by others)
- C** - Data output to DALI controller (wiring by others)
- D** - Data output to fixture (wiring by others)
- E** - Power input for DALI controller (if required, wiring by others)
- F** - DALI controller (by others)
- G** - Power input (100-277V AC, wiring by others)
- H** - Power and data wiring (by others)
- I** - Junction box (by others)
- J** - Lumenbeam Medium


DALI Dimming (DALI) - Wiring Detail



- A** - Power input or from previous fixture
- B** - To fixture
- C** - DA +
- D** - DA -
- E** - To next fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Wire-nut (by others)
- J** - From DALI controller (by others)
- K** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- 1% minimum dimming value.
- 28 watts per fixture.

Star Layout (DMX/RDM)

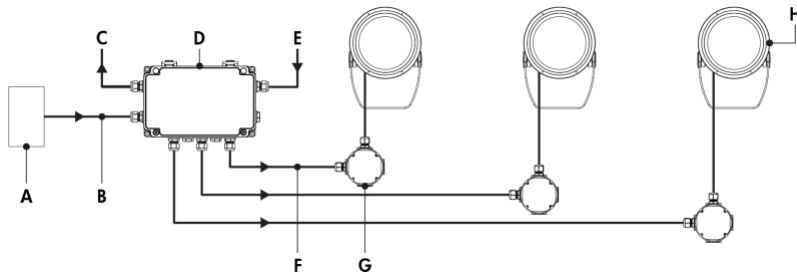

- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B** - Data input (Belden 9841 or equivalent, by others)
- C** - Data output to next CBX (optional, not isolated/not boosted)
- D** - CBX-ST
- E** - Power input (100-277V AC, wiring by others)
- F** - Power and data output to fixture (wiring by others)
- G** - Junction box (by others)
- H** - Lumenbeam Medium

Star Layout (DMX/RDM) - Wiring Detail



- A** - From CBX
- B** - Lumenterminator
- C** - To fixture
- D** - Data -
- E** - Data +
- F** - Neutral
- G** - Ground
- H** - Line
- I** - Signal common
- J** - Wire-nut (by others)
- K** - Junction box (by others)


Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBM	29	32	32	32

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- Each fixture requires 1 DMX address.
- DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.
- 1% minimum dimming value.
- 28 watts per fixture.

Daisy Chain Layout (DMX/RDM)

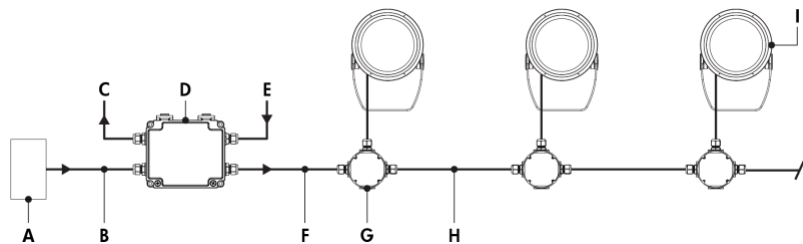


- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B** - Data input (Belden 9841 or equivalent, by others)
- C** - Data output to next CBX (optional, not isolated/not boosted)
- D** - CBX-DS
- E** - Power input (100-277V AC, wiring by others)
- F** - Power and data output to fixture (wiring by others)
- G** - Junction box (by others)
- H** - Power and data wiring (by others)
- I** - Lumenbeam Medium

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First or Middle of Run)



- A** - From CBX or previous fixture
- B** - To fixture
- C** - Neutral
- D** - Data +
- E** - Data -
- F** - To next fixture
- G** - Signal common
- H** - Line
- I** - Ground
- J** - Wire-nut (by others)
- K** - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End of Run)



- A** - From CBX or previous fixture
- B** - Lumenterminator
- C** - To fixture
- D** - Data -
- E** - Data +
- F** - Neutral
- G** - Ground
- H** - Line
- I** - Signal common
- J** - Wire-nut (by others)
- K** - Junction box (by others)

Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBM	29	32	32	32

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.

- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 3 ft cable length between fixture and next junction box for daisy chain layout.
- Each fixture requires 1 DMX address.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.
- 1% minimum dimming value.
- 28 watts per fixture.

How to Order

Housing	Voltage	Color and Color Temperature (1)	Optic	Optical Option (5) (7)	Finish	Control (11) (12)	Option	Certification	Cable Length (14) (18)	Cable Color	Buy American Act
LBM Lumenbeam™ Medium	100 100 volts	22K 2200K	XN Extra Narrow 3° (4)	LSLH Linear Spread Lens Horizontal Distribution (6)	BK Black Sandtex®	NO On/Off control	SY Short Yoke	UL UL Compliant	3FT 3 ft (14) (18)	BK Black	BAA Buy American (19) (20)
	120 120 volts	27K 2700K	VN Very Narrow 6° (4)	BRZ Bronze Sandtex®	DIM 0-10V Dimming	3GV 3G ANSI C136.31-2010 Vibration Rating for bridge applications	CE CE Compliant (17)	10FT 10 ft	WH White (19)		
	208 208 volts	30K 3000K	NS Narrow Spot 10° (4)	LSLV Linear Spread Lens Vertical Distribution (6)	SI Silver Sandtex®	DALI DALI dimming	CEII CE compliant Class II double insulated (17)	20FT 20 ft			
	220 220 volts	35K 3500K	NF Narrow Flood 20° (4)	WH Smooth White	DMX/RDM DMX/RDM Enabled (13) (14)	CRC Corrosion-resistant coating (15) (16)	30FT 30 ft				
	240 240 volts	40K 4000K	M Medium 30° (4)	BKTX Textured Black			50FT 50 ft				
	277 277 volts	57K 5700K	FL Flood 40° (4)	BRZTX Textured Bronze Non-Metallic			70FT 70 ft				
		RD Red (2) (3)	WFL Wide Flood 60° (4)	GRATX Textured Medium Gray			100FT 100 ft				
		GR Green (2) (3)	NAS Narrow Asymmetric (4)	GRNTX Textured Green							
		BL Blue (2) (3)	WW Asymmetric Wallwash (4)	WHTX Textured White							
				CC Custom Color & Finish (8) (9) (10)							

Notes:

1. Consult factory for availability of static Royal Blue, Amber, 6500K and 90+ CRI.
2. Static colors made to order 8-10 weeks.
3. Not available for XN optic.
4. Factory installed, not interchangeable on site.
5. Optical options are factory installed and cannot be changed in the field.
6. Field adjustable spread lens optical accessory available, order separately.
7. Not available with WFL, NAS and WW optics.
8. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.
9. Setup charges apply for RAL colors. Consult factory for details.
10. Longer lead times can be expected for custom RAL color finishes.
11. Lumentalk system is enabled with LDB accessory, DIM or DMX/RDM must be specified in the order code. See the typical wiring diagrams in the specification sheet for details.
12. A Lumentranslator 2 (LTL2) and LumentalkID (LIDL) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.
13. A control box (CBX) and LumenID (LID) must be specified.
14. Maximum of 3 ft cable length for daisy chain DMX applications with CBX-DS.
15. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.
16. Setup charges apply. Consult factory for details.
17. Consult European specification sheets and installation instructions for CE and CE Class II wiring information.
18. 3 ft cable length is standard unless otherwise specified.
19. Not available with CE or CEII certification options.
20. Contact your Lumenpulse Sales Representative for more information on order volume details.