


Project Name _____

Qty _____

Type _____

Catalog / Part Number _____

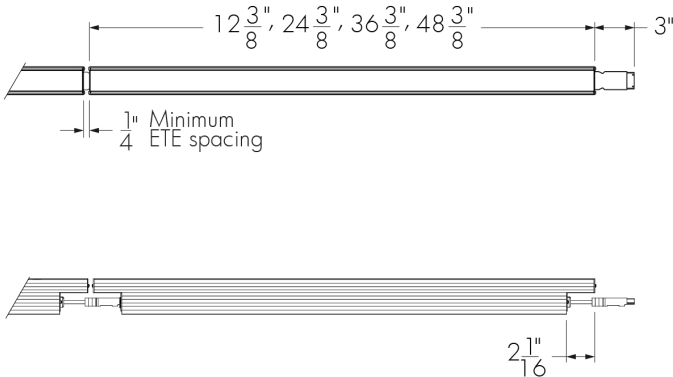

Photometric Summary

	Delivered output (lm)	Intensity (peak cd)
WW	2,628	3,770
8°x8°	3,018	47,870
10°x10°	3,283	30,621
10°x30°	2,803	19,221
10°x60°	2,595	9,773
10°x90°	2,619	5,492
15°x25°	2,840	16,938
30°x30°	2,757	10,447
30°x60°	2,641	3,457
35°x35°	2,871	7,365
50°x80°	2,759	2,582
60°x60°	2,717	2,350
80°x80°	2,844	1,898
90°x90°	2,628	1,412

Based on RGBW40K full output, 4ft [1219mm] DMX/RDM configuration.
Photometric performance is measured in compliance with IESNA LM-79-08.

Description

The Lumenfacade Interior Colour Changing is a high-performance linear LED luminaire for grazing or floodlighting interior walls with colour. This luminaire is available in 12 in, 24 in, 36 in or 48 in sections, and offers a wide number of options, including: a choice of optics for grazing or floodlighting; RGB, RGBW, or RGBA colour mixing; various mounting options, finishes, accessories and controls; as well as Legacy or Custom output modes.


Features

Color and Color Temperature	RGB, RGB + White 3000K, RGB + White 4000K, RGB + Amber
Length (Nominal)	12 in, 24 in, 36 in, 48 in
Optics	Asymmetric Wallwash, 8° x 8°, 10° x 10°, 10° x 30°, 10° x 60°, 10° x 90°, 15° x 25°, 30° x 30°, 30° x 60°, 35° x 35°, 50° x 80°, 60° x 60°, 80° x 80°, 90° x 90°
Power Consumption	17.25 W/ft, Typically 20% higher for 12 in fixture lengths
Warranty	5-year limited warranty

Performance

Maximum Delivered Output	3,039 lm (48 in fixture, RGB full output, 10° x 10°, DMX/RDM) 3,218 lm (48 in fixture, RGBW30K full output, 10° x 10°, DMX/RDM) 3,283 lm (48 in fixture, RGBW40K full output, 10° x 10°, DMX/RDM) 2,697 lm (48 in fixture, RGBA full output, 10° x 10°, DMX/RDM)
--------------------------	---

Optics

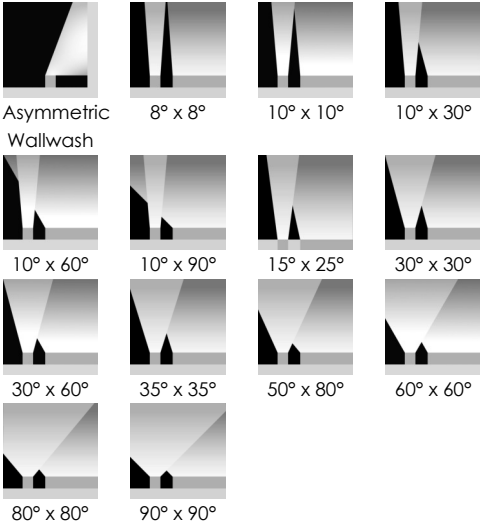

Control




Color and Color Temperature



Lumencycle™ Program



Certifications

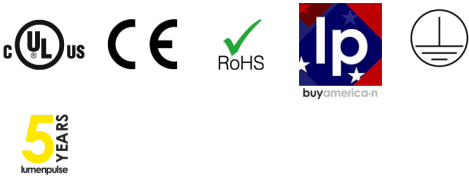

Maximum Delivered Intensity	44,316 cd at nadir (48 in fixture, RGB full output, 8 x 8°, DMX/RDM) 46,912 cd at nadir (48 in fixture, RGBW30K full output, 8 x 8°, DMX/RDM) 47,870 cd at nadir (48 in fixture, RGBW40K full output, 8 x 8°, DMX/RDM) 39,325 cd at nadir (48 in fixture, RGBA full output, 8 x 8°, DMX/RDM)
Illuminance at Distance	Minimum 1 fc at 211 ft (48 in fixture, RGB full output, 8° x 8°, DMX/RDM) Minimum 1 fc at 217 ft (48 in fixture, RGBW30K full output, 8° x 8°, DMX/RDM) Minimum 1 fc at 219 ft (48 in fixture, RGBW40K full output, 8° x 8°, DMX/RDM) Minimum 1 fc at 198 ft (48 in fixture, RGBA full output, 8° x 8°, DMX/RDM)
Lumen Maintenance	L70 280,000 hrs L95 35,000 hrs
Physical	
Housing Material	Low copper content extruded aluminum
Lens Material	Clear acrylic
Hardware Material	Stainless steel
End Cap Material	Aluminum
Surface Finish	Electrostatically applied polyester powder coat
Weight	12 in: 2.1 lbs 24 in: 3.7 lbs 36 in: 5.3 lbs 48 in: 6.8 lbs
Electrical and Control	
Voltage	120 to 277 volts, 347 volts available (consult factory for details)
Fixture Cable	Power and data in one cable, End-to-end configuration standard (factory installed input cable - no jumper cable needed for minimum spacing between two fixtures)
Fixture Cable and Connector Color	Black for Black Sandtex, Bronze Sandtex and Silver Sandtex finishes, White for Smooth White Finish
Leader Cable Conductor	3C #16-3 (LT control), 5C #16-5 (DMX/RDM control)
Control	Lumentalk, DMX/RDM Enabled, DALI 2 T8 Enabled Dimming 0.1%
Resolution (DMX/RDM)	Per foot or per fixture (configured with LumenID V3 software), 8-bit or 16-bit, 3 channels (RGB) or 4 channels (RGBW30K, RGBW40K and RGBA)
RGB Color Mixing	12 LEDs per 12 in (4x Red, 4x Green, 4x Blue)
RGBW30K Color Mixing	12 LEDs per 12 in (3x Red, 3x Green, 3x Blue, 3x White 3000K)
RGBW40K Color Mixing	12 LEDs per 12 in (3x Red, 3x Green, 3x Blue, 3x White 4000K)
RGBA Color Mixing	12 LEDs per 12 in (3x Red, 3x Green, 3x Blue, 3x Amber)

Environmental

Environment	Indoor applications only
Storage Temperature	-40 °F to 185 °F (device must reach start-up temperature value before operating)
Start-up Temperature	-13 °F to 122 °F
Operating Temperature	-40 °F to 122 °F

Accessories (Order Separately)

Cables	Lumenfacade Interior Leader Cable, Lumenfacade Interior Jumper Cable
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration), Lumentalk Data Bridge
Control Systems	Lumentone™ 2 (LTN2), Pharos® Designer Lighting Control Kit (PHAROS)
Diagnostic and Addressing Tools	LumenID (LID), LumentalkID (LIDLT)


Important

Virtual Patent Marking Notice


This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Asymmetric Wallwash Optic Details

WWLF - Asymmetric Wallwash Optic, Left Feed

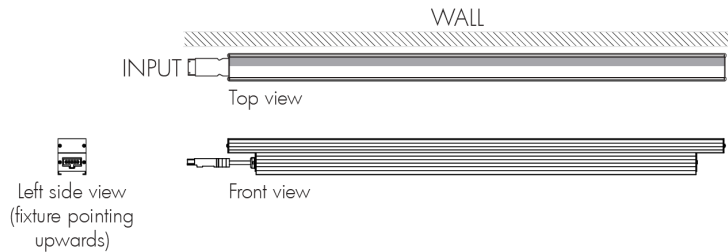

WWRF - Asymmetric Wallwash Optic, Right Feed

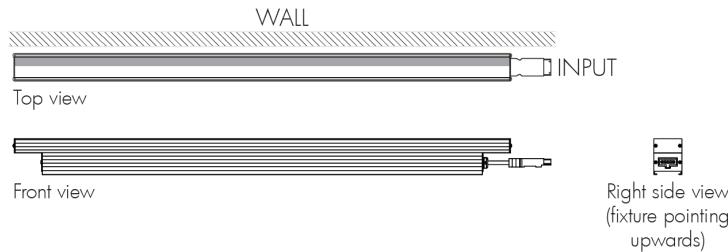


- Always position frosted side toward the wall.
- Fixture's feeding side is based on uplight installations. Feeding sides are reversed when fixture is used in a downlight application.
- Recommended setback from wall is 1/10 of the wall height. Example: 2 ft setback for a 20 ft wall.

Mounting Options


Surface Mount

SAM - Slim Adjustable Mounting

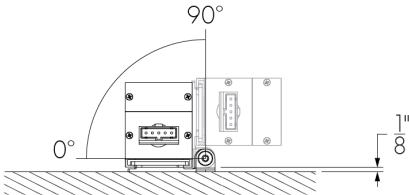


Not suitable when fixture is exposed to wind.


SAM - Mounting Hole Pattern



UMP - Fixed Mounting

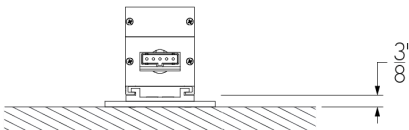


UMP - Mounting Hole Pattern

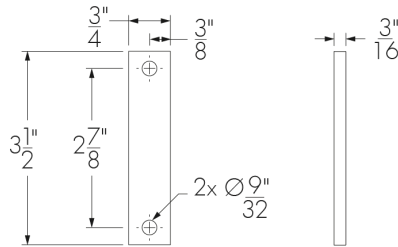


Wall Mount


UMAS - Universal Adjustable Mounting




UMAS - Mounting Hole Pattern




WAM2 - Adjustable Wall Mounting 2 in




WAM2 - Mounting Hole Pattern




WAM6 - Adjustable Extended Arm Mounting 6 in




WAM6 - Mounting Hole Pattern




WAM12 - Adjustable Extended Arm Mounting 12 in

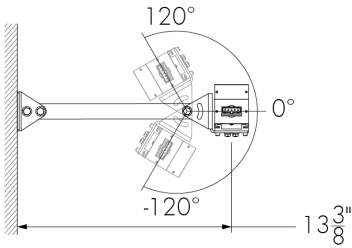


WAM12 - Mounting Hole Pattern



WAM18 - Adjustable Extended Arm Mounting 18 in

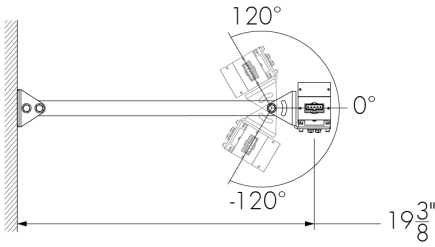


WAM18 - Mounting Hole Pattern



Cables (Order Separately)

LOGiLC - Leader Cable For Lumenfacade Interior



LOGiLC-CERTIFICATION-DATA-LENGTH-CABLE COLOR

Please specify:

CERTIFICATION: UL or CE; **LENGTH:** 10 ft, 25 ft, 50 ft, 100 ft, 150 ft or 200 ft; **CABLE COLOR:** black or white (connectors are the same color as the specified cable color)

- Consult Lumenfacade Interior leader cable specification sheet for details.

LOGiJC - Jumper Cable For Lumenfacade Interior



LOGiJC-CERTIFICATION-DATA-LENGTH-CABLE COLOR


Please specify:

CERTIFICATION: UL or CE; **LENGTH:** 1 ft to 30 ft (available in 1 ft increments) or 50 ft; **CABLE COLOR:** black or white (connectors are the same color as the specified cable color)

- Consult Lumenfacade Interior jumper cable specification sheet for details.

Wiring Compartment (Order Separately)


WC-120/277-LOGI-WH - Wiring Compartment

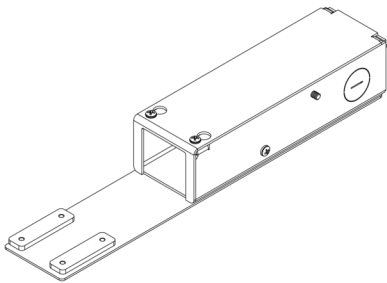

The Wiring Compartment is pre-wired with a leader cable, allowing the quick connection of conduits. Consult WC specification sheet for details.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

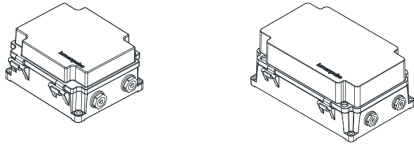


DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.

CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

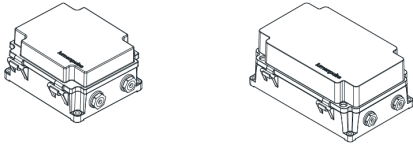

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


LDB - Lumentalk Data Bridge



Lumentalk Data Bridge, 0-10V or DMX output. Consult LDB specification sheet for details.

Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit

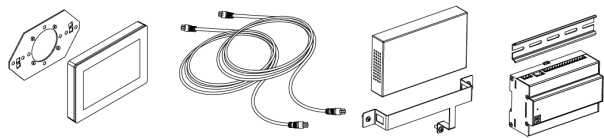

The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID




LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.


Resolution Details

DMX/RDM Control, Resolution Per Foot: Each 12 in Section is Addressed Independently

DMX Addresses:

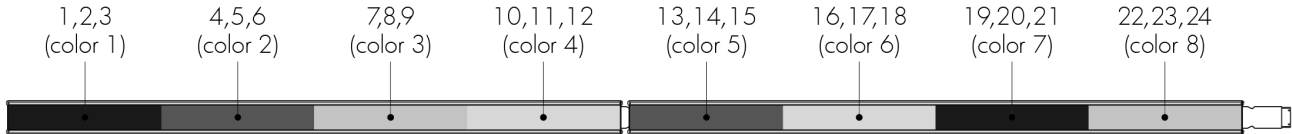

RGB color mixing option

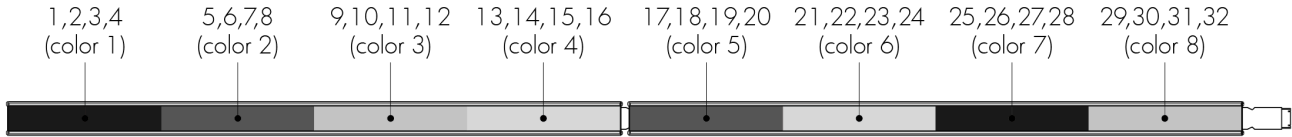

RGBW30K, RGBW40K and RGBA color mixing options

DMX/RDM Control, Resolution Per Fixture: Each Fixture is Addressed Independently

DMX Addresses:



RGB color mixing option



RGBW30K, RGBW40K and RGBA color mixing options


- 48 in fixtures shown.
- Applicable for DMX/RDM control option only. Fixture resolution can be configured on-site within the LumenID V3 software. A DMX/RDM enabled CBX is required.

Typical Wiring Diagrams

Wiring Color Code


UL Color Code	USE
Green	Ground
Black	Line
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -

Lumentalk (LT)

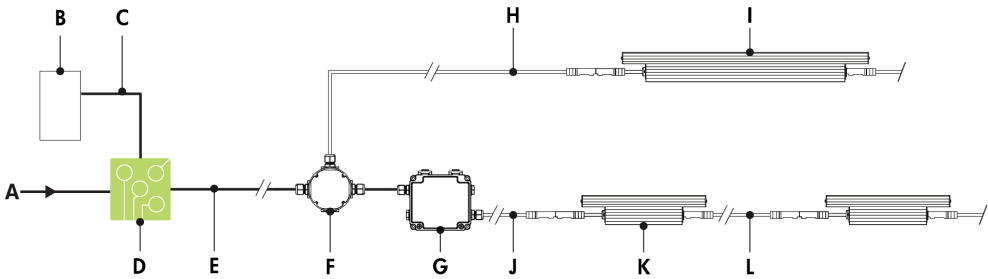

- A - Power input (120-277V AC, wiring by others)
- B - DMX/RDM controller (order separately from Lumenpulse, or by others)
- C - Data wiring (by others)
- D - Lumentranslator 2 (LTL2-DMX)
- E - Power wiring (by others)
- F - Junction box (by others)
- G - Lumentalk Data Bridge (LDB-DMX)
- H - Leader cable (LOGiLC)
- I - Lumenfacade Interior (24 in, 36 in or 48 in fixture lengths)
- J - Leader cable (LOGiLC-DATA)
- K - Lumenfacade Interior 12 in
- L - Jumper cable (LOGiJC-DATA) (optional)


Lumentalk (LT) - Wiring Detail

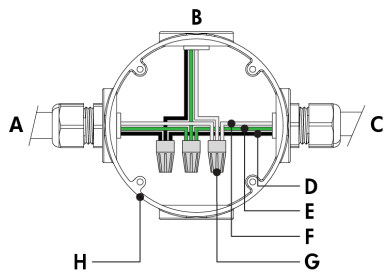

- A - Power input (control over power line via Lumentalk system) or from previous fixture
- B - To fixture
- C - To Lumentalk Data Bridge (for run lengths with 12 in fixtures)
- D - Line
- E - Ground
- F - Line/Neutral
- G - Wire-nuts (by others)
- H - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk Data Bridge required for 12 in fixture lengths, see LDB installation instructions for details. Fixtures must be specified as DMX/RDM and the Lumentalk Data Bridge must be specified as DMX. 2-step commissioning process: 1 - DMX/RDM system using LumenID software and a LID, 2 - Lumentalk system using LumentalkID software and a LID-LT. Consult factory for details.
- Maximum of 32 fixtures per LDB-DMX. Consult factory for details.
- 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- 17.25 W/ft.

Star Layout (DMX/RDM)

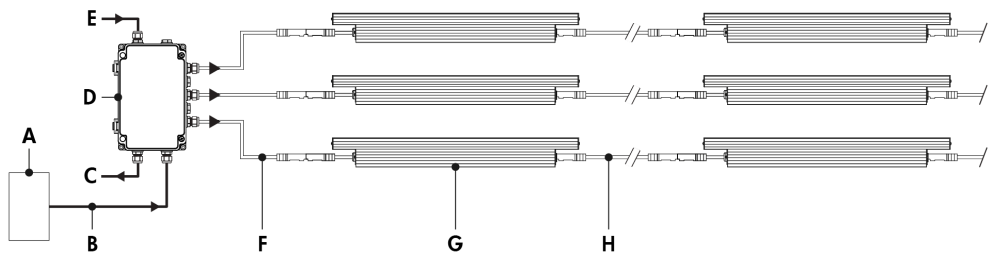

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (120-277V, wiring by others)
- F - Leader cable (LOGiLC)
- G - Lumenfacade Interior
- H - Jumper cable (LOGiJC) (optional)

Daisy Chain Layout (DMX/RDM)

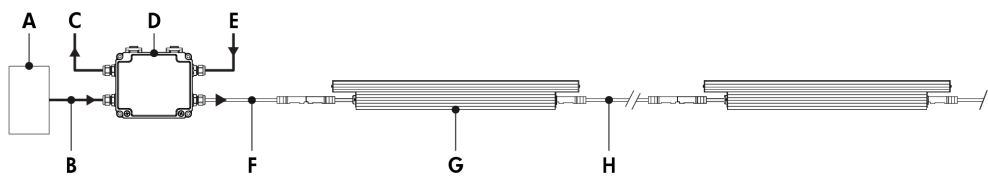

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (120-277V, wiring by others)
- F - Leader cable (LOGiLC)
- G - Lumenfacade Interior
- H - Jumper cable (LOGiJC) (optional)

Maximum Run of Fixtures, Lumenfacade® LOGI Color Changing 17.25 W/ft


Voltage	120V	240V	277V
Maximum Run of Fixtures*	68ft	80ft	88ft

Based on 15A maximum, 50ft leader cable.
*Example: 120V = 68ft maximum run of end to end fixtures (17 fixtures maximum for 4ft LOGI).

Based on 15A maximum, 50 ft leader cable.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations. Maximum run length calculations are typically based on 48 in fixtures.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST; maximum of 1 output per CBX-DS.
- RGB color mixture option requires 3 DMX addresses. RGBW30K and RGBW40K color mixture options require 4 DMX addresses. RGBA color mixture option requires 4 DMX addresses.
- 17.25 W/ft.

DALI 2 T8 (DALIT8)

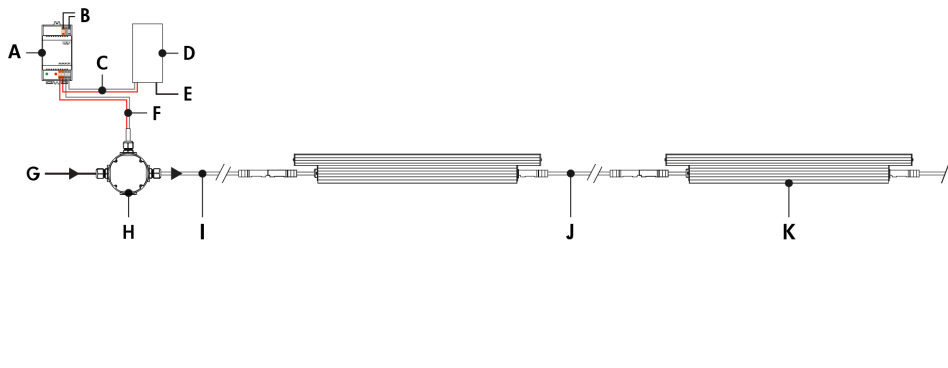

- A - DALI bus power supply (by others)
- B - Power input for DALI bus power supply (wiring by others)
- C - Data output to DALI controller (wiring by others)
- D - DALI controller (by others)
- E - Power input for DALI controller (if required, wiring by others)
- F - Data output to fixture (wiring by others)
- G - Power input (120-277V, wiring by others)
- H - Junction box (by others)
- I - Leader cable (LOGiLC)
- J - Jumper cable (LOGiJC) (optional)
- K - Lumenfacade Interior

DALI 2 T8 (DALIT8) - Wiring Detail

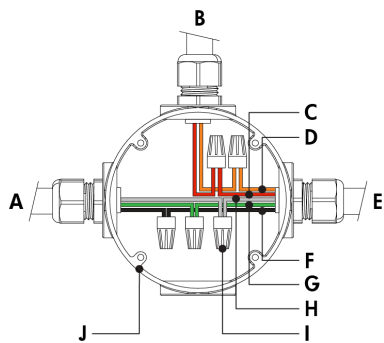

- A - Power input
- B - From DALI controller (by others)
- C - DA +
- D - DA -
- E - To fixture
- F - Line
- G - Ground
- H - Neutral
- I - Wire-nuts (by others)
- J - Junction box (by others)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- 17.25 W/ft.
- The Lumenfacade responds to RGBWAF controls.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.

How to Order

Housing ⁽¹⁾	Voltage ⁽²⁾	Length	Color and Color Temperature	Optic	Mounting Options	Finish	Control	Buy America.n Act
LOGI Lumenfacade™ Interior	120 120 Volts	12 12 3/8 in (2.1 lbs) ⁽¹⁾ ⁽³⁾	RGB RGB	WWLF Asymmetric Wallwash, left feed	SAM Slim Adjustable Mounting	BK Black Sandtex®	LT Lumentalk ⁽³⁾ ⁽⁹⁾ ⁽¹⁰⁾	BAA Buy America.n ⁽¹²⁾
	208 208 Volts	24 24 3/8 in (3.7 lbs)	RGBW30K RGB + White 3000K ⁽⁴⁾	WWRF Asymmetric Wallwash, right feed	UMP Fixed Mounting	BRZ Bronze Sandtex®	DMX/RDM 3-Channel Color Temperature Control via DMX/RDM	
	220 220 Volts	36 36 3/8 in (5.3 lbs)	RGBW40K RGB + White 4000K ⁽⁴⁾	8x8 8° x 8° ⁽⁵⁾	UMAS Universal Adjustable Mounting	SI Silver Sandtex®	DALIT8 DALI 2 T8 Enabled Dimming 0.1% ⁽¹¹⁾	
	240 240 Volts	48 48 3/8 in (6.8 lbs)	RGBA RGB + Amber	10x10 10° x 10° ⁽⁵⁾	WAM2 Adjustable Wall Mounting 2 in	WH Smooth White		
	277 277 Volts			10x30 10° x 30°	WAM6 Adjustable Extended Arm Mounting 6 in	CC Custom Color & Finish ⁽⁶⁾ ⁽⁷⁾ ⁽⁸⁾		
				10x60 10° x 60°	WAM12 Adjustable Extended Arm Mounting 12 in			
				10x90 10° x 90°	WAM18 Adjustable Extended Arm Mounting 18 in			
				15x25 15° x 25°				
				30x30 30° x 30°				
				30x60 30° x 60°				
				35x35 35° x 35°				
				50x80 50° x 80°				
				60x60 60° x 60°				
				80x80 80° x 80°				
				90x90 90° x 90				

Notes:

1. Power consumption is typically 20% higher for 12 in fixture lengths.

2. 347 volts available, consult factory for details.

3. To connect 12 in fixture lengths to the Lumentalk system, DMX/RDM must be specified as the control option, and a Lumentalk Data Bridge (LDB-DMX) is required. See the typical wiring diagrams in the specification sheet for details.

4. 2700K, 3500K and Royal Blue available, consult factory. Longer lead times apply.

5. For best results, we recommend a 6 in setback from surface. Contact factory for application support.

6. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.
7. Setup charges apply for RAL colors. Consult factory for details.

8. Longer lead times can be expected for custom RAL color finishes.

9. Available for 24 in, 36 in and 48 in fixture lengths only.

10. A Lumentranslator 2 (LTL2) and LumenID (UID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

11. DALI 2 T8 controller required, provided by others. DALI 2 T8 control uses a single DALI short address.

12. Contact your Lumenpulse Sales Representative for more information on order volume details.