




24W SMD LED recessed downlight, chrome bezel range, IP44.

Complete with 600mA driver.

Complies with standard EN60598-1 and any other specific standards.

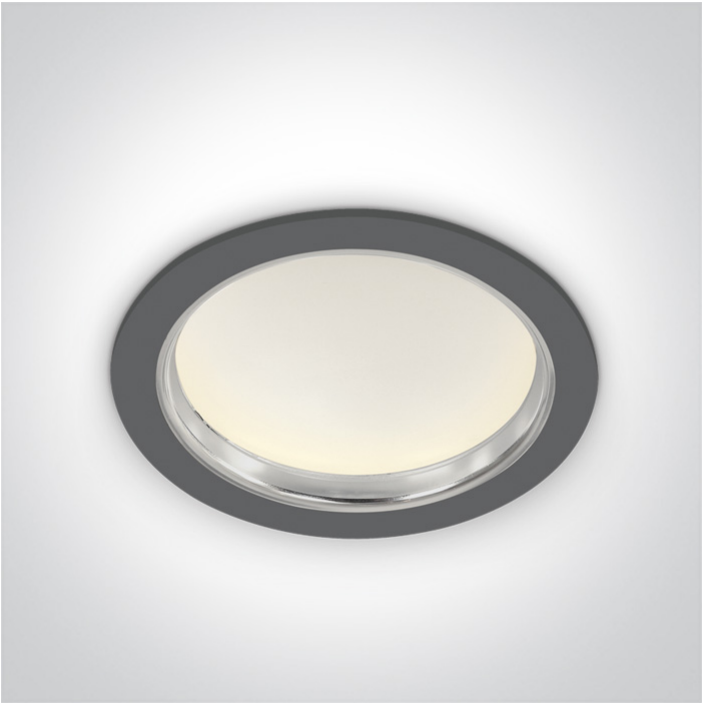

Downloads



Dimensions



Physical Specification

|                      |  |
|----------------------|--|
| Item Group           |  |
| Family               |  |
| Order Code           |  |
| Colour               |  |
| Material             |  |
| Shape                |  |
| Height               |  |
| Diameter             |  |
| Cutout Hole Diameter |  |
| Recessed Ceiling     |  |
| Depth Required       |  |
| Indoor               |  |

|                                  |
|----------------------------------|
| 06 Downlights Fixed LED          |
| The Chrome Bezel Range Aluminium |
| 10124/G/C                        |
| Grey                             |
| Aluminium                        |
| Circular                         |
| 125mm                            |
| 238mm                            |
| 210mm                            |
| Yes                              |
| 160mm                            |
| Yes                              |

Adjustable

No

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

24W

IP Rating

IP44

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

600mA

Voltage

36V

Power(Watts)

21,6W

IP Rating

IP44

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Sanan

LED Number

48

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

|                  |
|------------------|
| 50 Hz            |
| 60 Hz            |
| Power(Watts)     |
| Power Factor     |
| Constant Current |
| 600mA            |
| IP Rating        |
| Safety Class     |
| Dimmable         |
| Ambient Temp     |
| Operating Temp   |
| Housing Material |
| Output Terminal  |
| Brand            |

|                                                                                     |
|-------------------------------------------------------------------------------------|
| Yes                                                                                 |
| Yes                                                                                 |
| 18-24W                                                                              |
| 0,9                                                                                 |
| Yes                                                                                 |
| 30-40V                                                                              |
| IP20                                                                                |
|  |
| No                                                                                  |
| 50°                                                                                 |
| 80°                                                                                 |
| Plastic                                                                             |
| Cable                                                                               |
| Kegu                                                                                |

Illumination Data

|                      |
|----------------------|
| Colour Temperature   |
| Lumen Output         |
| Light Efficiency     |
| CRI                  |
| Beam Angle           |
| Illumination Diagram |

|                                                                                       |
|---------------------------------------------------------------------------------------|
| 4000K                                                                                 |
| 1550lm                                                                                |
| 64,58lm/W                                                                             |
| 80                                                                                    |
| 120°                                                                                  |
|  |

Packing Info

|            |
|------------|
| Box Length |
| Box Width  |
| Box Height |
| Box Weight |
| Pcs/Carton |
| Barcode    |

|               |
|---------------|
| 24,5cm        |
| 24,5cm        |
| 12,5cm        |
| 0,760kg       |
| 8             |
| 5291889034131 |

HS Code

9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes