


Project Name


Qty

Type

Catalog / Part Number



Front View



Bottom View

Photometric Summary

Symmetric


	Delivered output (lm)	Intensity (peak cd)
XN (3°)	4,259	593,580
VN (6°)	3,314	172,676
NS (10°)	5,543	82,608
NF (20°)	5,673	53,203
M (30°)	5,198	28,246
FL (40°)	4,648	11,469
WFL (60°)	4,626	4,677
VWFL (90°)	4,484	2,226

Asymmetric

NAS	3,687	56,790 (@2.5°)
WW	4,544	13,924 (@5°)

1. Based on 4000K.  
2. Photometric performance is measured in compliance with IESNA LM-79-24.  
3. Refer to the [Lumenbeam White and Static Colors Photometric Guide](#) on Lumenpulse website for information on other color temperatures.

Optic

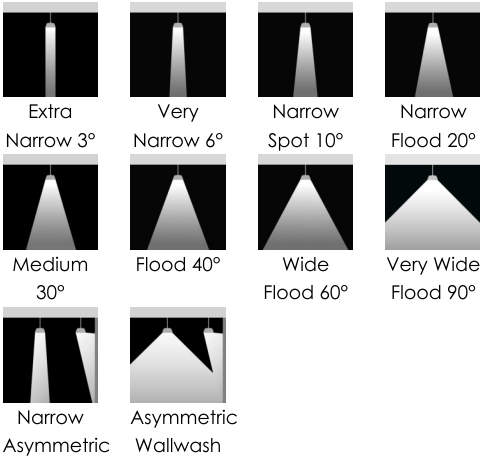

Description

The Lumenbeam Large Pendant is an IP66-rated suspended luminaire for high ceiling applications such as airport terminals and large public atriums. It has numerous options, including optics for flood or accent lighting, a choice of color temperatures and colors, various stem lengths, accessories, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.

Features

Color and Color Temperature	22K: 2200K, 27K: 2700K, 30K: 3000K, 35K: 3500K, 40K: 4000K, RD: Red, GR: Green, BL: Blue
Mounting Length	12: 12 in, 24: 24 in, 36: 36 in, 48: 48 in
Optics (Nominal Distribution)	XN: XN (3°), VN: VN (6°), NS: NS (10°), NF: NF (20°), M: M (30°), FL: FL (40°), WFL: WFL (60°), VWFL: VWFL (90°), NAS: NAS (Narrow Asymmetric), WW: WW (Asymmetric Wallwash)
Optical Option	LSLH: Linear Spread Lens Horizontal Distribution, LSLV: Linear Spread Lens Vertical Distribution
Option	CRC: Corrosion-Resistant Coating for Hostile Environments
Power Consumption	50 W
Warranty	5-year limited warranty

Performance

Maximum Delivered Output	5,673 lm (4000K, NF 20°)
Maximum Delivered Intensity	593,580 cd at nadir (4000K, XN 3°)
Illuminance at Distance	Minimum 1 fc at 774 ft (4000K, XN 3°)
Color Consistency	3 SDCM
Color Rendering	Minimum CRI 80

Color and Color Temperature

2200K

2700K

3000K

3500K

4000K

5700K

Red

Green

Blue

Control

ON/OFF    0-10V    DALI    DMX/RDM



Ratings

IP66 fixture    IP54 canopy    IK10

Certifications

Lumen Maintenance	L70 > 250,000 hrs (Ta 25 °C) (> 80,000 hrs for XN 3°, VN 6°, NAS optics only)
Physical	
Housing Material	Low copper content high pressure die-cast aluminum
Lens Material	Clear tempered glass
Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	12 lbs
Electrical and Control	
Voltage	100 to 277 volts
Fixture Cable	Power and data cable goes through stem
Conductors	3C #16-3 (NO, LT control) 5C #16-5 (DIM, DALI, ES control) 6C #14-3/ #24-3 (DMX/RDM control)
Control	On/Off Control, Lumentalk, 0-10V Dimming, DALI Dimming, DMX/RDM Enabled
Resolution (DMX/RDM)	Per fixture, 8-bit or 16-bit
Environmental	
Storage Temperature	-40 °F to 158 °F (device must reach start-up temperature value before operating)
Start-up Temperature	-13 °F to 122 °F
Operating Temperature	-40 °F to 122 °F
Ingress Protection Rating	IP66 fixture (wet location rated) IP54 canopy (suitable for wet location, not suitable for water jet)
Impact Resistance Rating	IK10
Accessories (Order Separately)	
Optical Accessories	Lumenbeam Large Snoot, Lumenbeam Large Snoot Wide, Lumenbeam Large Visor, Lumenbeam Large Linear Spread Lens Adjustable, Lumenbeam Large Wire Guard
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Pharos® Designer Lighting Control Kit (PHAROS), Pharos® Expert Control Kit (EXPERT)
Diagnostic and Addressing Tools	LumenID (LID)

Important


Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.


Chromaticity Data

TM-30 - 4000K

CCT	CIE		TM-30	
4000K	R <sub>a</sub>	83	R <sub>f</sub>	
	R <sub>g</sub>	14	R <sub>g</sub>	96




Spectral Power Distribution

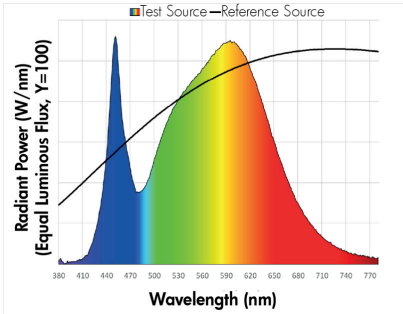


Mounting Types

SCAN - Standard Straight Stem Canopy

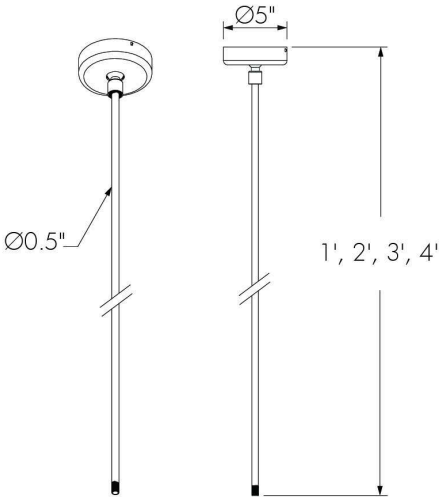

Not suitable when fixture is exposed to wind.  
Suitable for under canopy installation only.  
No vibration rating.

ACAN - Adjustable Sloped Ceiling Canopy

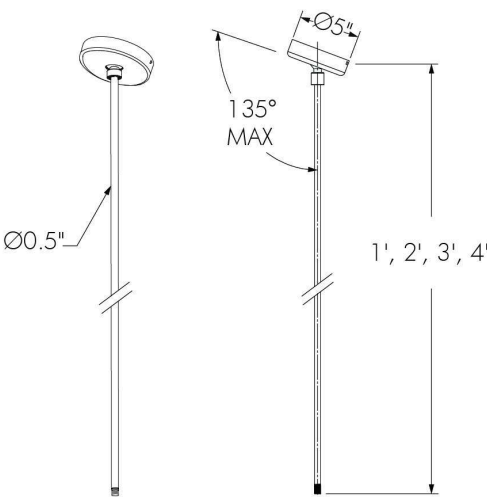


Not suitable when fixture is exposed to wind.  
Suitable for under canopy installation only.  
No vibration rating.

Optical Options

LSLH - Linear Spread Lens Horizontal Distribution



LSLV - Linear Spread Lens Vertical Distribution



Beam Angles

Optic installed in fixture	Beam angle with LSLH/LSLV
XN	5° x 60°
VN	7° x 60°
NS	13° x 66°
NF	16° x 62°
M	23° x 65°
FL	33° x 70°


LLF: 0.88\*

\*LLF may vary slightly by distribution chosen.

Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.  
See 'Optical Accessories' section for field adjustable spread lens (LSLA).


Optical Accessories (Order Separately)

SN - Snoot

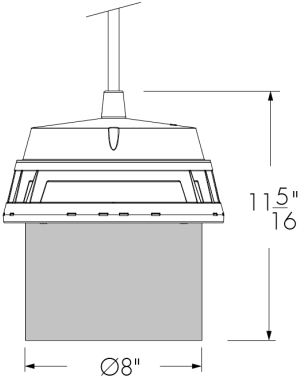


**LBLSN-FINISH-BK-OPTIONS (CRC)**  
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

VS - Visor

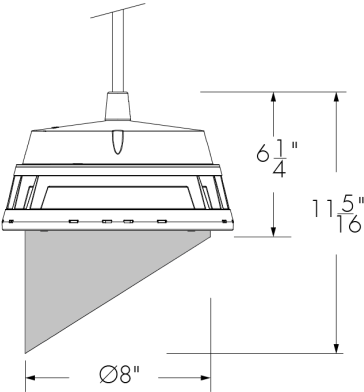


**LBLVS-FINISH-BK-OPTIONS (CRC)**  
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard




**LBLWG-FINISH-OPTIONS (CRC)**  
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

SNW - Snoot Wide

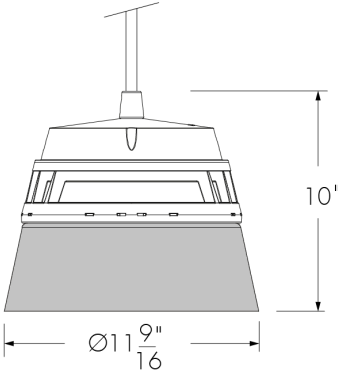

**LBLSNW-FINISH-BK-OPTIONS (CRC)**  
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

LSLA - Linear Spread Lens Adjustable



**LBLLSLA-FINISH-OPTIONS (CRC)**  
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

+	Snoot	Snoot wide	Visor
Linear spread lens adjustable	LBLSNLSLA	N/A*	LBVLSLSLA
Wire guard	LBLSNWWG	N/A	LBVSWWG

Accessory combinations must be ordered together on a single line  
Ex: A snoot + wire guard combination order code is **LBLSNWWG-FINISH-BK-OPTIONS**. A maximum of two accessories can be combined per fixture.  
\*Consult factory for a linear spread lens adjustable + snoot wide combination.


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147677

Diffuser Lens 2 (2 Notches)




147678

Diffuser Lens 3 (3 Notches)




147679

Diffuser Lens 4 (4 Notches)




147680

Diffuser Lens 5 (5 Notches)



147681

Diffuser Lens 6 (6 Notches)



147682

Final Distribution Using Diffuser Lenses

	Final Distribution Using Diffuser Lens					
Original Distribution on Fixture	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS	NF	M	FL	WFL
VN (6°)	NS					
NS (10°)						
NF (20°)						
M (30°)			FL	WFL		
FL (40°)						
WFL (60°)				VWFL		
VWFL (90°)						


Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LBS**: LBALK-S **LBM/LBMP**: LBALK-M **LBL/LBLP**: LBALK-L **LBG/LBGP**: LBALK-G **LBX/LBXP**: LBALK-X.

The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LBS**: LBSLSLA-**FINISH**-LBALK **LBM/LBMP**: LBMLSLSLA-**FINISH**-LBALK **LBL/LBLP**: LBLLSLSLA-**FINISH**-LBALK **LBG/LBGP**: LBGLSLA-**FINISH**-LBALK **LBX/LBXP**: LBLXLSLA-**FINISH**-LBALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.  
Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

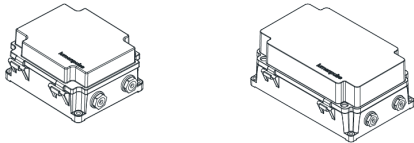

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

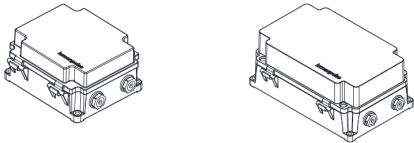

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit

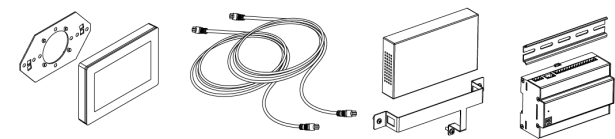

The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

EXPERT - Pharos® Expert Control Kit

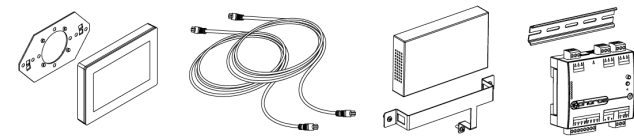

The Pharos Expert Control Kit, available for 1, 2, 4 or 6 DMX universes, allows for complete control of large lighting installations.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID




The updated LumenID (LID) is an all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Cable option may vary; please consult factory. For complete details, refer to the LID specification sheet.

Typical Wiring Diagrams

Wiring Color Code


UL Color Code	USE
Green	Ground
Black	Line
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -
Gray	Signal common (DMX/RDM only)

On/Off Control (NO)

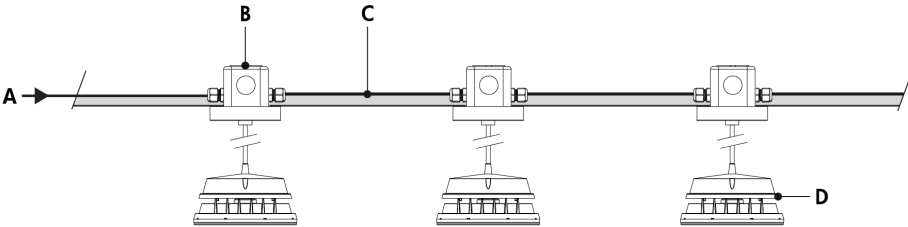

- A - Power input (100-277V AC, wiring by others)
- B - Junction box (by others)
- C - Power wiring (by others)
- D - Lumenbeam Large Pendant


On/Off Control (NO) - Wiring Detail

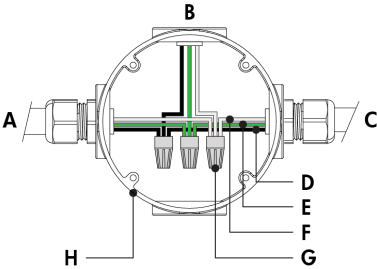

- A - Power input or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Wire-nut (by others)
- H - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 50 watts per fixture.

Lumentalk (LT)

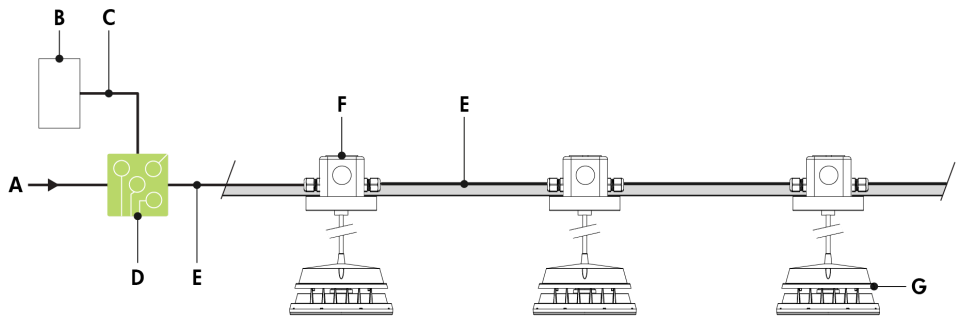

- A - Power input (100-277V AC, wiring by others)
- B - Dimmer/controller (order separately from Lumenpulse, or by others)
- C - Data wiring (by others)
- D - Lumentranslator 2 (LTL2-DIM, -DMX, -TRIAC, -DALI)
- E - Power wiring (by others)
- F - Junction box (by others)
- G - Lumenbeam Large Pendant

Lumentalk (LT) - Wiring Detail

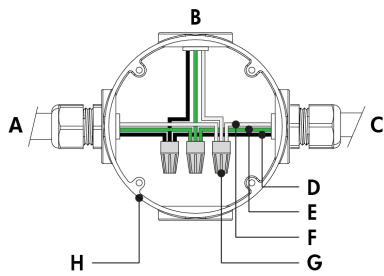


- A - Power input (control over power line via Lumentalk system) or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Wire-nut (by others)
- H - Junction box (by others)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- Consult factory for DALI Lumentalk applications.
- 1% minimum dimming value.
- 50 watts per fixture.




### 0-10V Dimming (DIM)

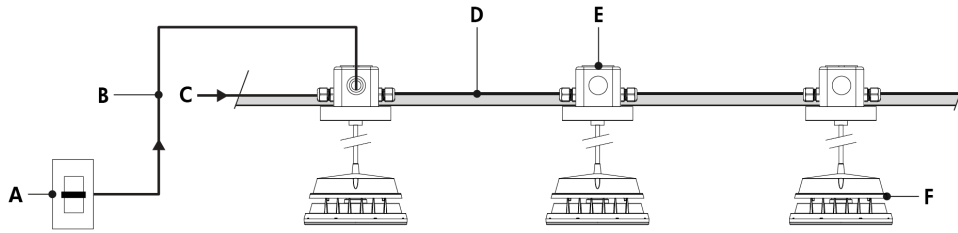

- A** - Dimmer (by others)
- B** - Data wiring (by others)
- C** - Power input (100-277V AC, wiring by others)
- D** - Power and data wiring (by others)
- E** - Junction box (by others)
- F** - Lumenbeam Large Pendant


### 0-10V Dimming (DIM) - Wiring Detail

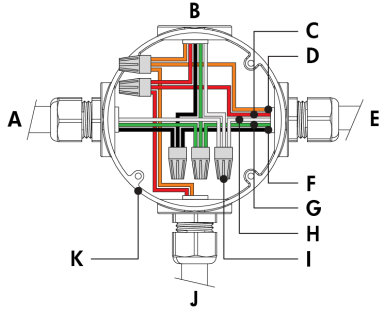

- A** - Power input or from previous fixture
- B** - To fixture
- C** - 0-10 V +
- D** - 0-10 V -
- E** - To next fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Wire-nut (by others)
- J** - From dimmer (by others)
- K** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 0-10V mA ratings: passive dimmer (Current Sink): 3mA per fixture, active dimmer (Current Source): 0.5mA per fixture.
- 1% minimum dimming value.
- 50 watts per fixture.

### DALI Dimming (DALI)

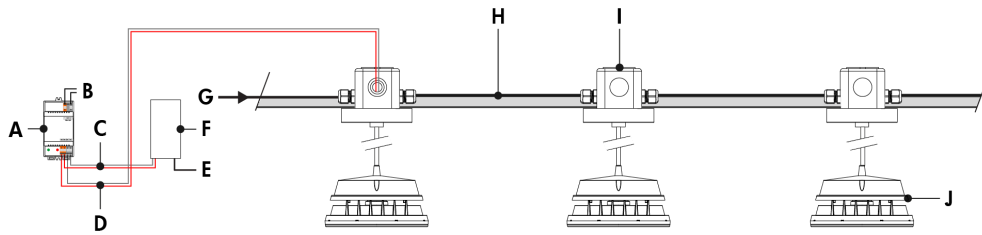

- A** - DALI bus power supply (by others)
- B** - Power input for DALI bus power supply (wiring by others)
- C** - Data output to DALI controller (wiring by others)
- D** - Data output to fixture (wiring by others)
- E** - Power input for DALI controller (if required, wiring by others)
- F** - DALI controller (by others)
- G** - Power input (100-277V AC, wiring by others)
- H** - Power and data wiring (by others)
- I** - Junction box (by others)
- J** - Lumenbeam Large Pendant


### DALI Dimming (DALI) - Wiring Detail

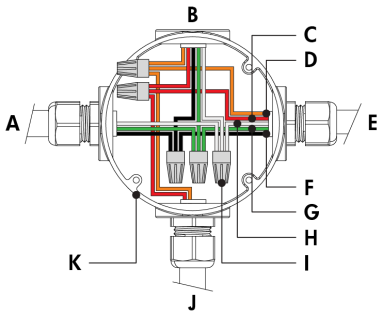

- A** - Power input or from previous fixture
- B** - To fixture
- C** - DA +
- D** - DA -
- E** - To next fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Wire-nut (by others)
- J** - From DALI controller (by others)
- K** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- 1% minimum dimming value.
- 50 watts per fixture.

Star Layout (DMX/RDM)

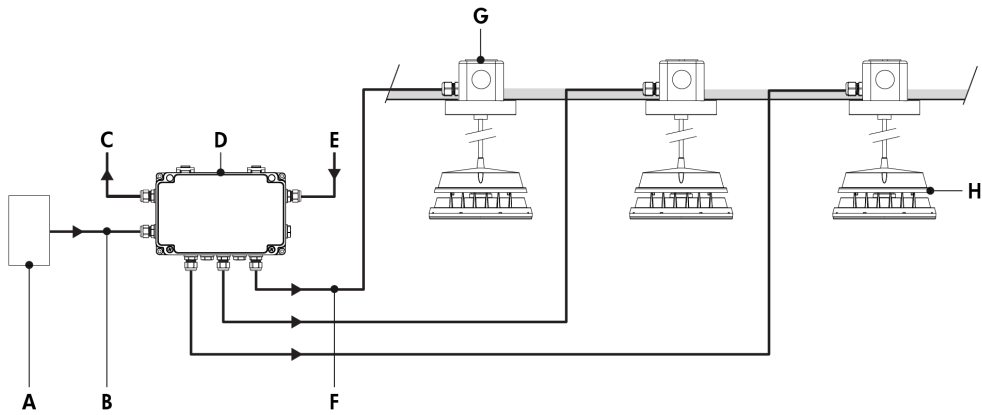

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (100-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenbeam Large Pendant

Star Layout (DMX/RDM) - Wiring Detail



- A - From CBX
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Wire-nut (by others)
- K - Junction box (by others)


Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBLP	18	28	32	32

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- Each fixture requires 1 DMX address.
- DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.
- 1% minimum dimming value.
- 50 watts per fixture.

Daisy Chain Layout (DMX/RDM)

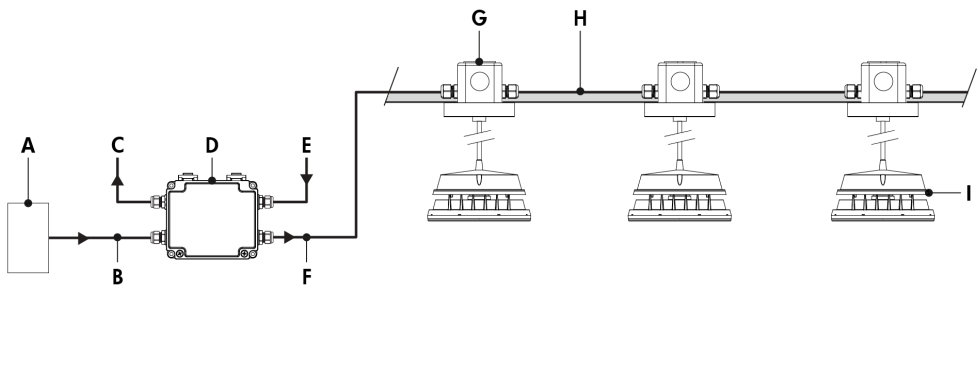


- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (100-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Power and data wiring (by others)
- I - Lumenbeam Large Pendant

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First or Middle of Run)

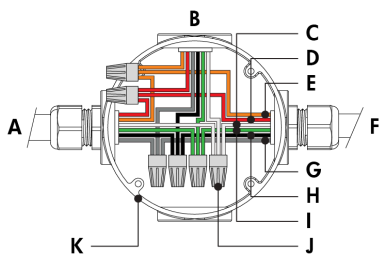

- A - From CBX or previous fixture
- B - To fixture
- C - Neutral
- D - Data +
- E - Data -
- F - To next fixture
- G - Signal common
- H - Line
- I - Ground
- J - Wire-nut (by others)
- K - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End of Run)



- A - From CBX or previous fixture
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Wire-nut (by others)
- K - Junction box (by others)

Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBP	18	28	32	32

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.

- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 3 ft cable length between fixture and next junction box for daisy chain layout.
- Each fixture requires 1 DMX address.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.
- 1% minimum dimming value.
- 50 watts per fixture.

How to Order

Housing	Voltage	Color and Color Temperature <sup>(1)</sup>	Optic	Mounting Type	Mounting Length <sup>(5)</sup>	Optical Option <sup>(4) (8)</sup>	Finish	Control	Option	Certification	Buy America.n Act		
LBLP Lumenbeam™ Large Pendant	100 100 Volts	22K 2200K	XN Extra Narrow 3° <sup>(4)</sup>	SCAN Straight Stem Canopy	12 12 in	LSLH Linear Spread Lens Horizontal Distribution <sup>(7)</sup>	BK Black Sandtex®	NO On/Off Control	CRC Corrosion- Resistant Coating <sup>(15)</sup> <sup>(16)</sup>	UL UL Compliant	BAA Buy America.n <sup>(18)</sup> <sup>(19)</sup>		
	120 120 Volts	27K 2700K	VN Very Narrow 6° <sup>(4)</sup>	ACAN Adjustable Sloped Ceiling Canopy	24 24 in	LSLV Linear Spread Lens Vertical Distribution <sup>(7)</sup>	BRZ Bronze Sandtex®	LT Lumentalk <sup>(12)</sup> <sup>(13)</sup>	CE CE Compliant <sup>(17)</sup>				
	208 208 Volts	30K 3000K	NS Narrow Spot 10° <sup>(4)</sup>		36 36 in		SI Silver Sandtex®	DIM 0-10V Dimming		CEII CE Compliant Class II Double Insulated <sup>(17)</sup>			
	240 240 Volts	35K 3500K	NF Narrow Flood 20° <sup>(4)</sup>		48 48 in		WH Smooth White	DALI DALI Dimming					
	220 220 Volts	40K 4000K	FL Flood 40° <sup>(4)</sup>				BKTX Textured Black	DMX/RDM DMX/RDM Enabled Dimming <sup>(14)</sup>					
	277 277 Volts	RD Red <sup>(2) (3)</sup>	M Medium 30° <sup>(4)</sup>				BRZTX Textured Bronze Non- Metallic						
		GR Green <sup>(2) (3)</sup>	FL Flood 40° <sup>(4)</sup>				GRATX Textured Medium Gray						
		BL Blue <sup>(2) (3)</sup>	WFL Wide Flood 60° <sup>(4)</sup>				GRNTX Textured Green						
			VWFL Very Wide Flood 90° <sup>(4)</sup>				WHTX Textured White						
			NAS Narrow Asymmetric <sup>(4)</sup>				CC Custom Color & Finish <sup>(9) (10) (11)</sup>						
			WW Asymmetric Wallwash <sup>(4)</sup>										

Notes:

1. Consult factory for availability of static Royal Blue, Amber, 6500K and 90+ CRI.

2. Static colors made to order 8-10 weeks.

3. Not available for XN optic.

4. Factory installed, not interchangeable on site.

5. Consult factory for custom stem lengths.

6. Optical options are factory installed and cannot be changed in the field.

7. Field adjustable spread lens optical accessory available, order separately.

8. Not available with WFL, VWFL, NAS and WW optics.

9. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.
10. Setup charges apply for RAL colors. Consult factory for details.

11. Longer lead times can be expected for custom RAL color finishes.

12. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

13. Not available with Class II double insulated option.

14. A control box (CBX) and LumenID (LID) must be specified.

15. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.

16. Setup charges apply. Consult factory for details.

17. Consult European specification sheets and installation instructions for CE and CE Class II wiring information.

18. Not available with CE or CEI certification options.

19. Contact your Lumenpulse Sales Representative for more information on order volume details.