


Project Name


Qty

Type

Catalog / Part Number



Front View



Bottom View

Photometric Summary (Discrete RGBW40K)

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
XN (3°)	4,669	430,170
VN (6°)	5,079	351,460
NS (10°)	5,049	189,556
NF (20°)	4,425	37,332
M (30°)	4,483	18,931
FL (40°)	4,465	12,309
WFL (60°)	4,599	4,775
Asymmetric		
NAS	3,829	63,368 (@2.5°)
WW	4,303	18,755 (@5°)

¹ Based on RGBW40K full output.
² Photometric performance is measured in compliance with IESNA LM-79-24.
³ Refer to the [Lumenbeam Color Changing Photometric Guide](#) on Lumenpulse website for information on other color temperatures.

Photometric Summary (Opticolor+ MRGBWP)

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
NS (10°)	4,891	86,649
NF (20°)	4,375	28,226
M (30°)	4,255	15,349
FL (40°)	4,405	11,899
WFL (60°)	4,233	4,330
VWFL(90°)	3,903	1,988

¹ Based on MRGBWP full output, white set to 3000K.
² Photometric performance is measured in compliance with IESNA LM-79-24.
³ Refer to the [Lumenbeam Color Changing Photometric Guide](#) on Lumenpulse website for information on other color temperatures.

Description

The Lumenbeam Grande Pendant Color Changing is an IP66-rated suspended luminaire for applying white or colored light to indoor areas with high ceilings or large outdoor spaces. The system offers numerous options, including optics for flood or accent lighting; a choice of color mixing; various stem lengths, accessories, spread lenses, and controls. The luminaire also has an anti-corrosion option for use in harsh, chemical, or coastal environments.

Features

Colors and Color Temperature (Discrete)	RGBA: Discrete Red, Green Blue, Amber
	RGBW30K: Discrete Red, Green, Blue, White 30K
	RGBW40K: Discrete Red, Green, Blue, White 40K
	RGB: Discrete Red, Green, Blue
Colors and Color Temperature (Opticolor™)	MRGBA: Opticolor™ Mix-at-Source Red, Green, Blue, PC Amber
Colors and Color Temperature (Opticolor+®)	MRGBWP: Opticolor+® Mix-at-Source Red, Green, Blue Plus White Settable Range 24K to 65K
	MRGBWP Typical Color Rendering:
	2700K-5000K: 90+ CRI
	2500K-6500K: 80+ CRI
	MARGROYWP: Opticolor+® Mix-at-Source Red, Green, Royal Blue Plus White Settable Range 24K to 65K


Mounting Length	12: 12 in
	24: 24 in
	36: 36 in
	48: 48 in

Photometric Summary (Opticolor MRGBA)

Symmetric		
	Delivered output (lm)	Intensity (peak cd)
NS (10°)	4,754	84,223
NF (20°)	4,253	27,435
M (30°)	4,136	14,919
FL (40°)	4,282	11,566
WFL (60°)	4,114	4,209
VWFL(90°)	3,794	1,932

1. Based on MRGBA full output.
2. Photometric performance is measured in compliance with IESNA LM-79-24.
3. Refer to the Lumenbeam Color Changing Photometric Guide on Lumenpulse website for information on other color temperatures.

Optic

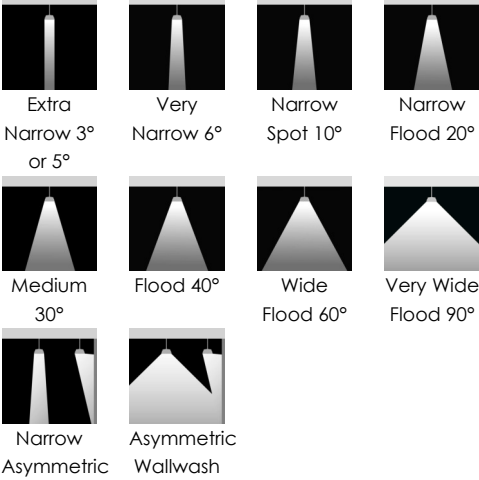

Optics (Nominal Distribution)	XN: XN (4° or 5°) VN: VN (6°) NS: NS (10°) NF: NF (20°) M: M (30°) FL: FL (40°) WFL: WFL (60°) VWFL: VWFL (90°) NAS: NAS (Narrow Asymmetric) WW: WW (Asymmetric Wallwash)
Optical Option	LSLH: Linear Spread Lens Horizontal Distribution LSLV: Linear Spread Lens Vertical Distribution
Option	CRC: Corrosion-Resistant Coating for Hostile Environments
Cable Color	BK: Black WH: White
Power Consumption	86 to 100 W (see Power Consumption table for details)
Warranty	5-year limited warranty
Performance	
Maximum Delivered Output (Discrete)	5,143 lm (RGB full output, VN 6°, DMX/RDM) 4,977 lm (RGBW30K full output, VN 6°, DMX/RDM) 5,079 lm (RGBW40K full output, VN 6°, DMX/RDM) 4,149 lm (RGBA full output, VN 6°, DMX/RDM)
Maximum Delivered Output (Opticolor)	4,754 lm (MRGBA full output, NS 10°, DMX/RDM)
Maximum Delivered Output (Opticolor+)	4,891 lm (MRGBWP full output, NS 10°, DMX/RDM)
Maximum Delivered Intensity (Discrete)	357,498 cd at nadir (RGB full output, XN 5°, DMX/RDM) 421,567 cd at nadir (RGBW30K full output, XN 3°, DMX/RDM) 430,170 cd at nadir (RGBW40K full output, XN 3°, DMX/RDM) 351,449 cd at nadir (RGBA full output, XN 3°, DMX/RDM)
Maximum Delivered Intensity (Opticolor)	84,223 cd at nadir (MRGBA full output, NS 10°, DMX/RDM)
Maximum Delivered Intensity (Opticolor+)	86,649 cd at nadir (RGBW30K full output, XN 3°, DMX/RDM)
Illuminance at Distance (Discrete)	Minimum 1 fc at 600 ft (RGB full output, XN 5°, DMX/RDM) Minimum 1 fc at 652 ft (RGBW30K full output, XN 3°, DMX/RDM) Minimum 1 fc at 659 ft (RGBW40K full output, XN 3°, DMX/RDM) Minimum 1 fc at 595 ft (RGBA full output, XN 3°, DMX/RDM)
Illuminance at Distance (Opticolor)	Minimum 1 fc at 290 ft (MRGBA full output, NS 10°, DMX/RDM)
Illuminance at Distance (Opticolor+)	Minimum 1 fc at 294 ft (MRGBWP full output, NS 10°, DMX/RDM)
Lumen Maintenance	L70 (15K) > 90,000 hrs Ta 25 °C (TM-21 reported) L70 > 150,000 hrs Ta 25 °C (projected)* L90 (15K) = 55,400 hrs Ta 25 °C (TM-21 reported) L90 = 55,400 hrs Ta 25 °C (projected)* *Estimated based on in-situ case temperature and LM-80 report

Color and Color Temperature



opticolor+®

Opticolor+®
Mix-at-Source
Red, Green,
Blue Plus White
Settable
Range 24K to
65K



opticolor™

Opticolor™
Mix-at-Source
Red, Green,
Blue, PC
Amber



RGBA

Discrete Red,
Green Blue,
Amber



RGBW
30K

Discrete Red,
Green, Blue,
White 30K



RGBW
40K

Discrete Red,
Green, Blue,
White 40K



RGB

Discrete Red,
Green, Blue



opticolor+®

Opticolor+®
Mix-at-Source
Red, Green,
Royal Blue Plus
White Settable
Range 24K to
65K

Control



DMX/RDM



Ratings

IP66 fixture

IP54 canopy

IK09

Lumencycle™ Program



Certifications







Physical

Housing Material	Low copper content high pressure die-cast aluminum
Lens Material	Clear tempered glass
Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	22 lbs

Electrical and Control

Voltage	100 to 277 volts
Fixture Cable	Power and data cable goes through stem
Conductors	3C #16-3 (LT control) 5C #16-5 (DALI8 control) 6C #14-3/ #24-3 (DMX/RDM control)
Control	Lumentalk, DMX/RDM Enabled, DALI 2 T8 Enabled Dimming 0.1%
Resolution (DMX/RDM)	Per board or fixture (configured with LumenID V3 software), 8-bit or 16-bit, 3 channels (RGB) or 4 channels (RGBW30K, RGBW40K, RGBA, MRGBA, MRGBWP and MRGROYWP)

Environmental

Storage Temperature	-40 °F to 158 °F (device must reach start-up temperature value before operating)
Start-up Temperature	-13 °F to 122 °F
Operating Temperature	-40 °F to 122 °F
Ingress Protection Rating	IP66 fixture (wet location rated) IP54 canopy (suitable for wet location, not suitable for water jet)
Impact Resistance Rating	IK09

Accessories (Order Separately)

Optical Accessories	Lumenbeam Grande Snoot, Lumenbeam Grande Snoot Wide, Lumenbeam Grande Visor, Lumenbeam Grande Linear Spread Lens Adjustable, Lumenbeam Grande Wire Guard
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Pharos® Designer Lighting Control Kit (PHAROS), Pharos® Expert Control Kit (EXPERT)
Diagnostic and Addressing Tools	LumenID (LID)

Operation and Maintenance

Lumencycle™ Program	Lumencycle-enabled fixtures are designed for serviceability and circular lifecycle management. Lumenpulse will provide factory refurbishment programs, allowing luminaires to be restored and redeployed rather than replaced.
---------------------	---

Important

Virtual Patent Marking Notice


This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Lumencycle™ Program

Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.

Color Point Information

MRGBWP

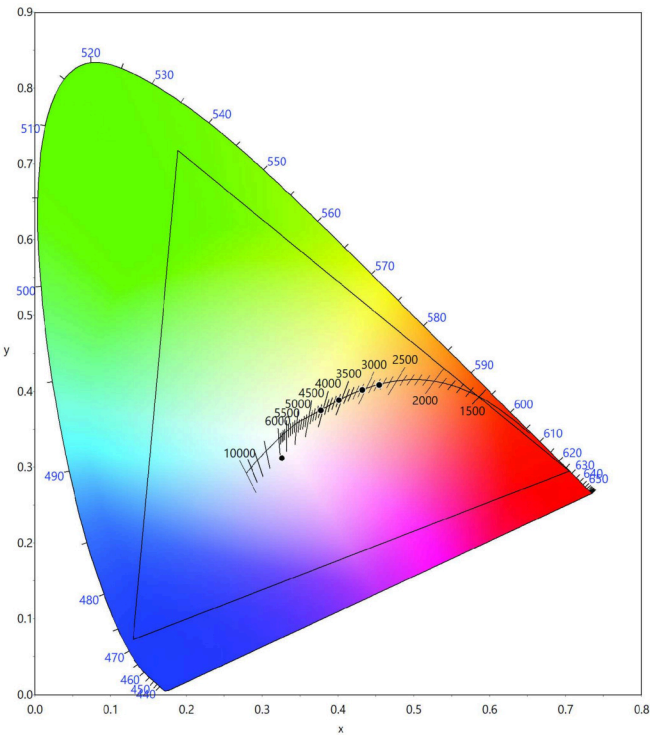

Dominant Wavelength and Chromaticity

	Dominant Wavelength	Chromaticity	
		Cx	Cy
Red	~628nm	0.7050	0.2949
Green	~531nm	0.1885	0.7178
Blue	~471nm	0.1298	0.0726
Amber	~591nm	0.5755	0.4126

	Cx	Cy
MRGBWP Full On	0.3261	0.3121
27K Optidrive	0.4545	0.4081
30K Optidrive	0.4318	0.4017
35K Optidrive	0.4010	0.3883
40K Optidrive	0.3773	0.3747


Values measured from Steady State Full on Optidrive @ 25°C ambient conditions.

Power Consumption

Control Option	Color and Color Temperature	Optic	Wattage (W)
LT DMX/RDM DALI8	RGB	XN/NAS	100
		VN/NS/NF/M/FL/WFL/ VWFL/WWW	86
LT DMX/RDM DALI8	RGBW, RGBA	XN/NAS	96
		VN/NS/NF/M/FL/WFL/ VWFL/WWW	90
LT DMX/RDM DALI8	MRGBA, MRGBWVP, MRGRBWP	NS/NF/M/FL/WFL/VWFL	100


Mounting Types

SCAN - Standard Straight Stem Canopy

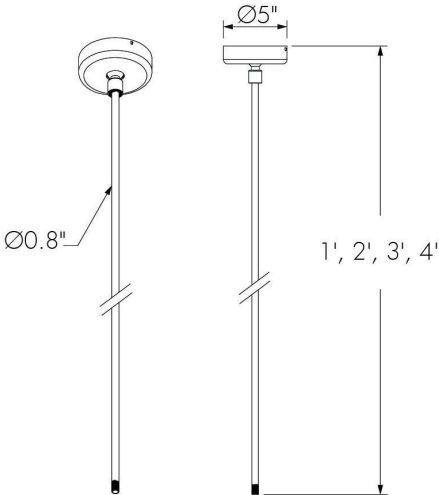

Not suitable when fixture is exposed to wind.
Suitable for under canopy installation only.
No vibration rating.

ACAN - Adjustable Sloped Ceiling Canopy

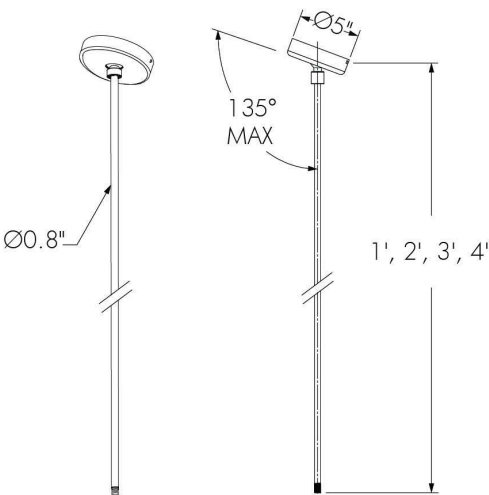


Not suitable when fixture is exposed to wind.
Suitable for under canopy installation only.
No vibration rating.

Optical Options – Discrete

LSLH - Linear Spread Lens Horizontal Distribution



LSLV - Linear Spread Lens Vertical Distribution



Beam Angles

Optic installed in fixture	Beam angle with LSLH/LSLV
XN	5° x 60°
VN	8° x 50°
NS	9° x 56°
NF	17° x 57°
M	27° x 68°
FL	37° x 74°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.


Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).

Optical Options - Opticolor™ and Opticolor+

LSLH - Linear Spread Lens Horizontal Distribution



LSLV - Linear Spread Lens Vertical Distribution



Beam Angles


Optic installed in fixture	Beam angle with LSLH/LSLV
NS	11° x 61°
NF	19° x 66°
M	26° x 70°
FL	31° x 71°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.

Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.
See 'Optical Accessories' section for field adjustable spread lens (LSLA).


Optical Accessories (Order Separately)

SN - Snoot

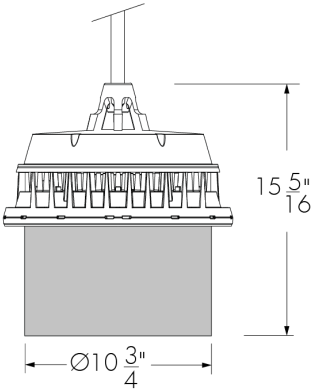


LBGSN-**FINISH-BK-OPTIONS** (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

VS - Visor

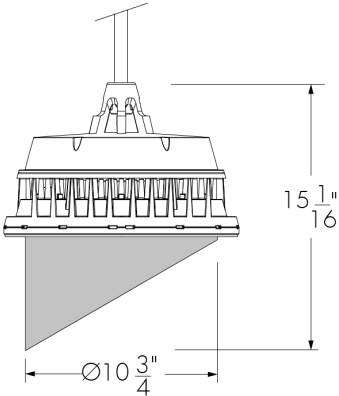


LBGVS-**FINISH-BK-OPTIONS** (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard




LBGWG-**FINISH-OPTIONS** (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

SNW - Snoot Wide

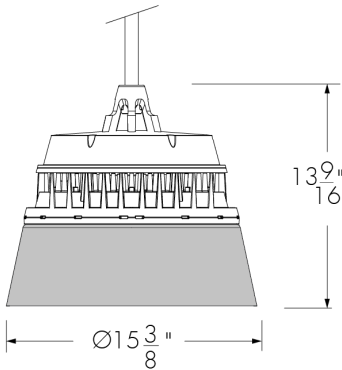

LBGSNW-**FINISH-BK-OPTIONS** (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

LSLA - Linear Spread Lens Adjustable



LBGLSLA-**FINISH-OPTIONS** (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

+	Snoot	Snoot wide	Visor
Linear spread lens adjustable	LBGSNLSLA	N/A*	LBGVLSLA
Wire guard	LBGSNWG	N/A	LBGVSWG

Accessory combinations must be ordered together on a single line
Ex: A snoot + wire guard combination order code is LBGSNWG-**FINISH-BK-OPTIONS**. A maximum of two accessories can be combined per fixture.
*Consult factory for a linear spread lens adjustable + snoot wide combination.


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147683

Diffuser Lens 2 (2 Notches)




147684

Diffuser Lens 3 (3 Notches)




147685

Diffuser Lens 4 (4 Notches)




147686

Diffuser Lens 5 (5 Notches)



147687

Diffuser Lens 6 (6 Notches)



147688

Final Distribution Using Diffuser Lenses

	Final Distribution Using Diffuser Lens					
Original Distribution on Fixture	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS	NF	M	FL	WFL
VN (6°)	NS					
NS (10°)						
NF (20°)						
M (30°)			FL	WFL		
FL (40°)						
WFL (60°)				VWFL		
VWFL (90°)						


Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LBS**: LBALK-S **LBM/LBMP**: LBALK-M **LBL/LBLP**: LBALK-L **LBG/LBGP**: LBALK-G **LBX/LBXP**: LBALK-X.

The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LBS**: LBSLSLA-FINISH-LBALK **LBM/LBMP**: LBMLSLA-FINISH-LBALK **LBL/LBLP**: LBLLSLA-FINISH-LBALK **LBG/LBGP**: LBGLSLA-FINISH-LBALK **LBX/LBXP**: LBXLSLA-FINISH-LBALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.
Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

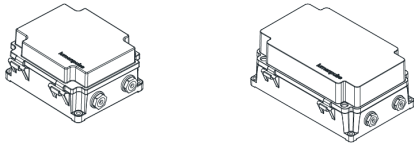

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

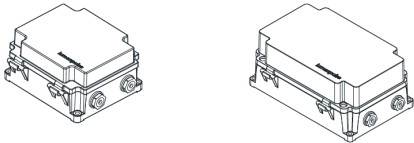

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit

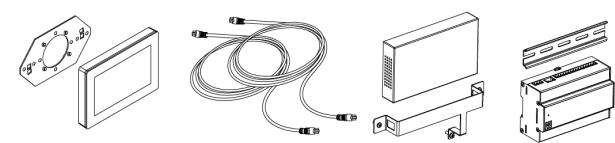

The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

EXPERT - Pharos® Expert Control Kit

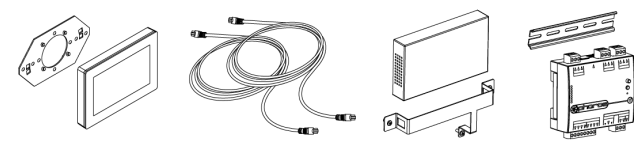

The Pharos Expert Control Kit, available for 1, 2, 4 or 6 DMX universes, allows for complete control of large lighting installations.

Diagnostic And Addressing Tools (Order Separately)


LID - LumenID




The updated LumenID (LID) is an all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Cable option may vary; please consult factory. For complete details, refer to the LID specification sheet.

Resolution Details (Discrete)

Resolution Per Board: Each Board is Addressed Independently
DMX Addresses:

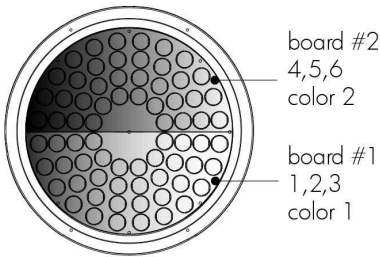


RGB color mixing option

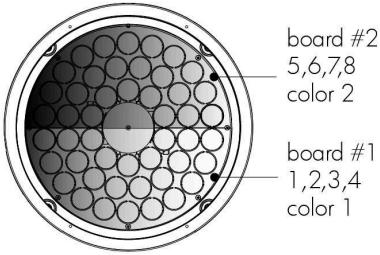


RGBW30K, RGBW40K and RGBA color mixing options.

Resolution Per Fixture: Each Fixture Is Addressed Independently
DMX Addresses:



RGB color mixing option




RGBW30K, RGBW40K and RGBA color mixing options.

Fixture resolution can be configured on-site within the LumenID V3 software.


Resolution Details (Opticolor and Opticolor+)

Resolution Per Board: Each Board is Addressed Independently
DMX Addresses:

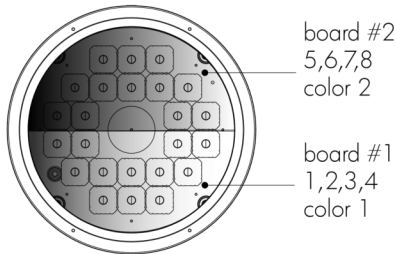

MRGBA, MRGBWP and MRGROYWP color mixing options

Resolution Per Fixture: Each Fixture Is Addressed Independently
DMX Addresses:

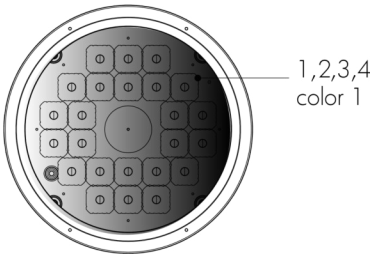


MRGBA, MRGBWP and MRGROYWP color mixing options

Typical Wiring Diagrams

Wiring Color Code


UL Color Code	USE
Green	Ground
Black	Line
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -
Gray	Signal common (DMX/RDM only)

Lumentalk (LT)

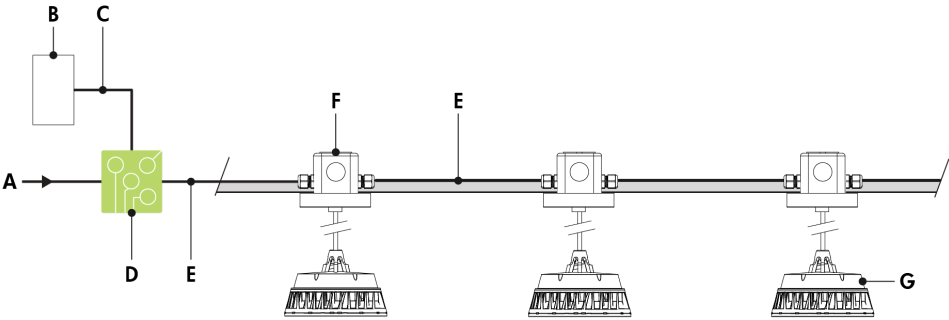

- A - Power input (100-277V AC, wiring by others)
- B - DMX/RDM controller (order separately from Lumenpulse, or by others)
- C - Data wiring (by others)
- D - Lumentranslator 2 (LTL2-DMX)
- E - Power wiring (by others)
- F - Junction box (by others)
- G - Lumenbeam Grande Pendant


Lumentalk (LT) - Wiring Detail

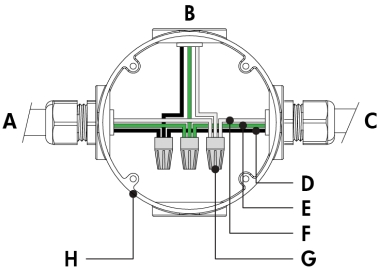

- A - Power input (control over power line via Lumentalk system) or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Wire-nut (by others)
- H - Junction box (by others)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- 86 to 100 watts per fixture, see Power Consumption table for details.

Star Layout (DMX/RDM)

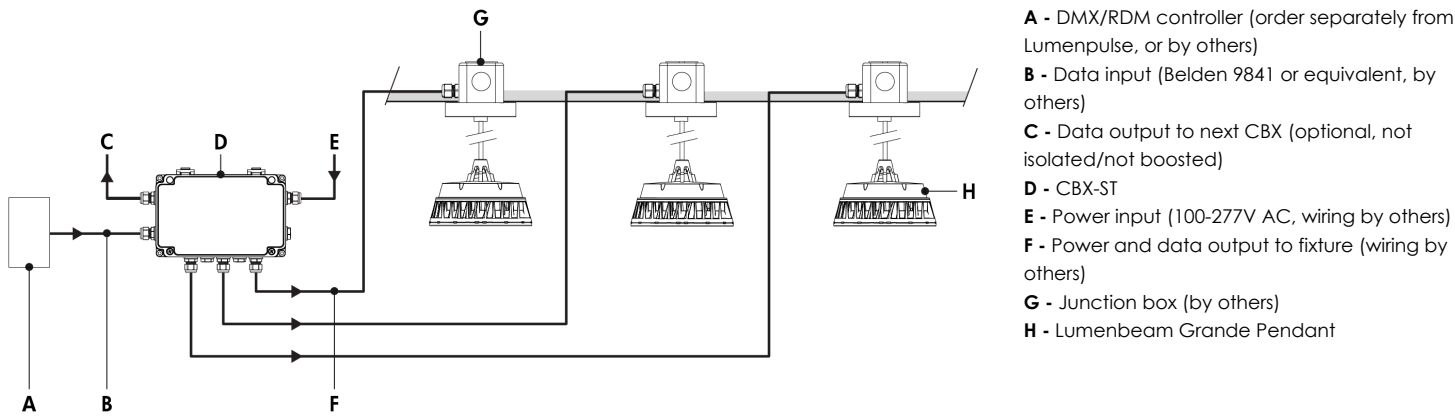

Star Layout (DMX/RDM) - Wiring Detail




Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBGP	10	16	18	21

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- RGB color mixture option requires 3 DMX addresses. RGBW30K and RGBW40K, RGBA, MRGBA, MRGBWP and MRGROYWP color mixture options require 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.
- 86 to 100 watts per fixture, see Power Consumption table for details.

Daisy Chain Layout (DMX/RDM)

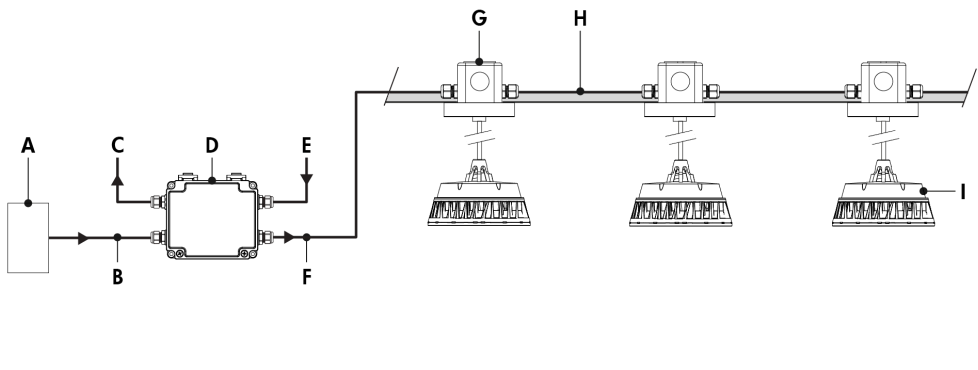


- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (100-277V AC, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Power and data wiring (by others)
- I - Lumenbeam Grande Pendant

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First or Middle of Run)

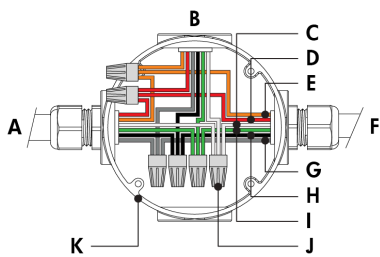

- A - From CBX or previous fixture
- B - To fixture
- C - Neutral
- D - Data +
- E - Data -
- F - To next fixture
- G - Signal common
- H - Line
- I - Ground
- J - Wire-nut (by others)
- K - Junction box (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End of Run)



- A - From CBX or previous fixture
- B - Lumenterminator
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Wire-nut (by others)
- K - Junction box (by others)


Maximum Fixture Count Per Run

Configuration/Voltage	120V	208V	240V	277V
LBGP	10	16	18	21

Based on 15A maximum, 16AWG cable, fixtures spaced 10 ft on center, first fixture 50 ft from CBX.


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 3 ft cable length between fixture and next junction box for daisy chain layout.
- RGB color mixture option requires 3 DMX addresses. RGBW30K and RGBW40K, RGBA, MRGBA, MRGBWP and MRGROYWP color mixture options require 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.
- 86 to 100 watts per fixture, see Power Consumption table for details.

DALI 2 T8 (DALIT8)

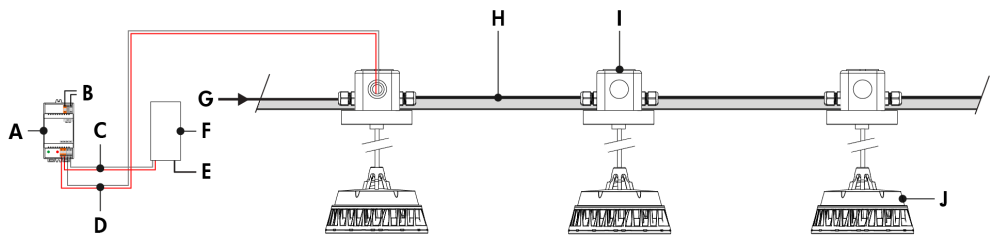

- A - DALI bus power supply (by others)
- B - Power input for DALI bus power supply (wiring by others)
- C - Data output to DALI controller (wiring by others)
- D - Data output to fixture (wiring by others)
- E - Power input for DALI controller (if required, wiring by others)
- F - DALI controller (by others)
- G - Power input (100-277V AC, wiring by others)
- H - Power and data wiring (by others)
- I - Junction box (by others)
- J - Lumenbeam Grande Pendant

DALI 2 T8 (DALIT8) - Wiring Detail

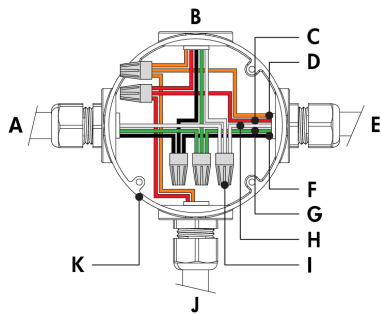

- A - Power input or from previous fixture
- B - To fixture
- C - DA +
- D - DA -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Wire-nut (by others)
- J - From DALI controller (by others)
- K - Junction box (by others)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- The Lumenbeam responds to RGBWAF for color controls and Tc for dim to warm and tunable white.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- 86 to 100 watts per fixture, see Power Consumption table for details.

How to Order

Housing	Voltage	Color and Color Temperature ⁽¹⁾	Optic1	Optic2	Mounting Type	Mounting Length ⁽¹⁶⁾	Optical Option ⁽¹⁷⁾ ⁽¹⁹⁾	Finish	Control
LBGP Lumenbeam™ Grande Pendant	100 100 Volts	MRGBWP Opticolor+® Mix-at-Source Red, Green, Blue Plus White Settable Range 24K to 65K ⁽²⁾ ⁽³⁾ ⁽⁴⁾ ⁽⁵⁾ ⁽⁶⁾	XN Extra Narrow 3° or 5° ⁽¹⁰⁾ ⁽¹¹⁾ ⁽¹²⁾	XN Extra Narrow 3° or 5° ⁽¹⁰⁾ ⁽¹¹⁾ ⁽¹²⁾	SCAN Straight Stem Canopy	12 12 in	LSLH Linear Spread Lens Horizontal Distribution ⁽¹⁸⁾ LSLV Linear Spread Lens Vertical Distribution ⁽¹⁸⁾	BK Black Sandtex®	LT Lumentalk ⁽²³⁾ ⁽²⁴⁾ DMX/RDM DMX/RDM Enabled Dimming ⁽²⁵⁾ DALI T8 DALI 2 T8 Enabled Dimming 0.1% ⁽⁶⁾ ⁽²⁶⁾
	120 120 Volts		VN Very Narrow 6° ⁽¹¹⁾ ⁽¹²⁾	VN Very Narrow 6° ⁽¹¹⁾ ⁽¹²⁾	ACAN Adjustable Sloped Ceiling Canopy	24 24 in		BRZ Bronze Sandtex®	
	208 208 Volts	MRGBA Opticolor™ Mix-at-Source Red, Green, Blue, PC Amber ⁽²⁾ ⁽⁷⁾	NS Narrow Spot 10° ⁽¹¹⁾	NS Narrow Spot 10° ⁽¹¹⁾		36 36 in		SI Silver Sandtex®	
	220 220 Volts		NF Narrow Flood 20° ⁽¹¹⁾	NF Narrow Flood 20° ⁽¹¹⁾		48 48 in		WH Smooth White	
	240 240 Volts	RGBA Discrete Red, Green Blue, Amber	M Medium 30° ⁽¹¹⁾ ⁽¹³⁾	M Medium 30° ⁽¹¹⁾ ⁽¹³⁾				BKTX Textured Black	
	277 277 Volts	RGBW30K Discrete Red, Green, Blue, White 30K ⁽⁷⁾	FL Flood 40° ⁽¹¹⁾	FL Flood 40° ⁽¹¹⁾				BRZTX Textured Bronze Non-Metallic	
		RGBW40K Discrete Red, Green, Blue, White 40K ⁽⁷⁾	WFL Wide Flood 60° ⁽¹¹⁾ ⁽¹⁴⁾	WFL Wide Flood 60° ⁽¹¹⁾ ⁽¹⁴⁾				GRATX Textured Medium Gray	
		RGB Discrete Red, Green, Blue	VWFL Very Wide Flood 90° ⁽¹¹⁾ ⁽¹⁴⁾ ⁽¹⁵⁾	VWFL Very Wide Flood 90° ⁽¹¹⁾ ⁽¹⁴⁾ ⁽¹⁵⁾				GRNTX Textured Green	
		MRGROYWP Opticolor+® Mix-at-Source Red, Green, Royal Blue Plus White Settable Range 24K to 65K ⁽²⁾ ⁽³⁾ ⁽⁴⁾ ⁽⁵⁾ ⁽⁶⁾ ⁽⁸⁾ ⁽⁹⁾	NAS Narrow Asymmetric ⁽¹¹⁾ ⁽¹²⁾	NAS Narrow Asymmetric ⁽¹¹⁾ ⁽¹²⁾				WHTX Textured White	
			WW Asymmetric Wallwash ⁽¹¹⁾ ⁽¹²⁾	WW Asymmetric Wallwash ⁽¹¹⁾ ⁽¹²⁾				CC Custom Color & Finish ⁽²⁰⁾ ⁽²¹⁾ ⁽²²⁾	

Notes:

1. White Channel Set Point or Warm Dimming Range is adjustable at commissioning. Consult Opticolor+ Personality Guide for details.

2. Not available with XN, VN, NAS and WW optics.

3. Consult factory for the availability of more color and CCT options.

4. MRGBWP and MRGROYWP can be configured to MRGB via RDM, consult factory for more details.

5. Fixtures are shipped from the factory in Optidrive™ Mode. Normal Mode can be activated onsite for DMX/RDM and LT fixtures. For DMX/RDM applications, Optidrive Mode requires a LumenID, LumenID software and onsite commissioning. For LT applications, Optidrive Mode requires a LumenID, LumentalkID software and onsite commissioning. Additionally, with Opticolor+™ the white CCT is configurable in the field from 2200K-8000K.

6. Consult factory for DALI T8 applications with MRGBWP or MRGROYWP and a CCT other than 3000K.

7. Consult factory for availability of other color options such as Royal Blue.

8. Longer lead time of 10-12 weeks.

9. Consult factory for photometric performance.

10. Nominal distribution is 3° for RGBW30K, RGBW40K and RGBA color options, and 5° for RGB.

11. Factory installed, not interchangeable on site.

12. Not available with MRGBA, MRGBWP and MRGROYWP color temperature options.

13. Cannot be combined with other optics when RGB, RGBW30K, RGBW40K and RGBA color temperatures are specified.
14. Cannot be combined with other optics.

15. Available with MRGBA, MRGBWP and MRGROYWP color temperature options only.

16. Consult factory for custom stem lengths.

17. Optical options are factory installed and cannot be changed in the field.

18. Field adjustable spread lens optical accessory available, order separately.

19. Not available with WFL, VWFL, NAS and WW optics.

20. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.

21. Setup charges apply for RAL colors. Consult factory for details.

22. Longer lead times can be expected for custom RAL color finishes.

23. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

24. Not available with Class II double insulated option.

25. A control box (CBX) and LumenID (LID) must be specified.

26. DALI 2 T8 controller required, provided by others. DALI 2 T8 control uses a single DALI short address.

How to Order

Option	Certification	Cable Color	Buy American Act
CRC Corrosion-Resistant Coating ⁽²⁷⁾ ⁽²⁸⁾	UL UL Compliant CE CE Compliant ⁽²⁹⁾ CEII CE Compliant Class II Double Insulated ⁽²⁹⁾	BK Black WH White ⁽³⁰⁾	BAA Buy American ⁽³⁰⁾ ⁽³¹⁾

Notes:

- 27.** Use only when exposed to salt spray. This option is not required for normal outdoor exposure.

28. Setup charges apply. Consult factory for details.

29. Consult European specification sheets and installation instructions for CE and CE Class II wiring information.
- 30.** Not available with CE or CEII certification options.

31. Contact your Lumenpulse Sales Representative for more information on order volume details.