


Project Name _____


Qty _____

Type _____

Catalog / Part Number _____

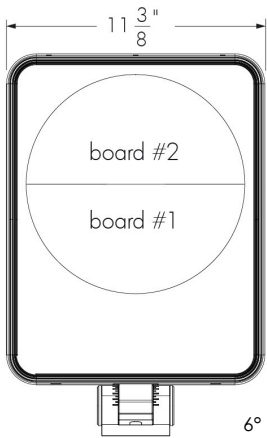

Front View
6° Increment Pivot

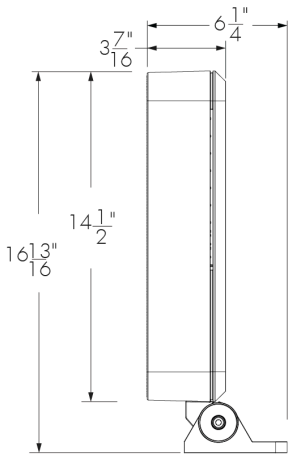

Side View


Photometric Summary

Symmetric

	Delivered output (lm)	Intensity (peak cd)
XN (5°)	6,511	452,608
VN (6°)	5,695	243,890
NS (10°)	5,755	216,057
NF (20°)	5,071	42,766
M (30°)	5,132	21,666
FL (40°)	5,115	14,101
WFL (60°)	5,263	5,463
VWFL (90°)	6,484	3,360
Asymmetric		
NAS	6,010	99,473 (@2.5°)
WW	4,930	21,485 (@5°)

¹. Based on DWH, full output.
². Photometric performance is measured in compliance with IESNA LM-79-24.
³. Refer to the [Lumenquad Dynamic White Photometric Guide](#) on Lumenpulse website for information on other color temperatures.

Optic

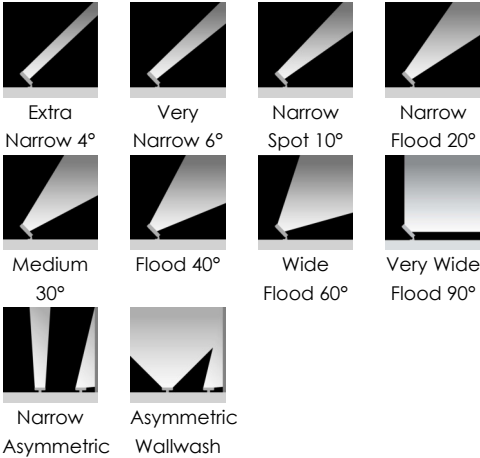

Description

The Lumenquad Grande Dynamic White, 100W LED luminaire, has a sleek 3 7/16 in profile with no visible wiring or hardware and seamlessly integrates with any architecture. Its Dynamic White feature enables smooth variations in color temperature, from 2200K to 3000K or from 2700K to 6500K, and gives you the freedom to update the color of light in response to the way a space is used. Lumenpulse’s latest generation of LED boards possess an optimized candela and lumens recipe for both Narrow and Wide optics. The Lumenquad Grande Dynamic White is the epitome of versatile and can be configured with numerous options including optics for wallwash and floodlighting, as well as various mounting options, accessories, controls, and multiple standard finishes.

Features

Color and Color Temperature

DWW: Dynamic Warm White (2200K to 3000K), **DWH:** Dynamic White (2700K to 6500K)

Optics (Nominal Distribution)

XN: XN (4°), **VN:** VN (6°), **NS:** NS (10°), **NF:** NF (20°), **M:** M (30°), **FL:** FL (40°), **WFL:** WFL (60°), **VWFL:** VWFL (90°), **NAS:** NAS (Narrow Asymmetric), **WW:** WW (Asymmetric Wallwash)

Mounting Options

SM: Surface Mount, **WM:** Wall Mount Bracket with Decorative Cover, **WMNC:** Wall Mount Bracket without Decorative Cover, **RJBOX:** Recessed JBOX Wall Mount with Decorative Cover, **RJBOXNC:** Recessed JBOX Wall Mount Without Decorative Cover, **PM:** Pole Mount, **TN:** Tenon Mount, **SK:** Stake Mount, **NOTE:** All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.

Optical Options (Factory Installed)

LSLH: Linear Spread Lens Horizontal Distribution, **LSLV:** Linear Spread Lens Vertical Distribution, **HL:** Honeycomb Louver

Option

CRC: Corrosion-Resistant Coating for Hostile Environments

Power Consumption

100 W (LT and DMX/RDM control), 71 W (DIM/DTW and DMX/RDM1 control)

Color and Color Temperature

D_{WW}

Dynamic Warm White
(2200K to 3000K)

D_{WH}

Dynamic White
(2700K to 6500K)

Control

DIM/DTW

DMX/RDM1

DMX/RDM

lumen talk

DALI T8

Ratings

IP66 IK10

Lumencycle™ Program



Certifications

Warranty	5-year limited warranty
Performance	
Maximum Delivered Output	5,040 lm (DWW full output, XN 5°, DMX/RDM) 6,511 lm (DWH full output, XN 5°, DMX/RDM)
Maximum Delivered Intensity	350,318 cd at nadir (DWW full output, XN 5°, DMX/RDM) 452,608 cd at nadir (DWH full output, XN 5°, DMX/RDM)
Illuminance at Distance	Minimum 1 fc at 594 ft (DWW full output, XN 5°, DMX/RDM) Minimum 1 fc at 676 ft (DWH full output, XN 5°, DMX/RDM)
Lumen Maintenance	L70 120,000 hrs (Ta 25 °C)
Physical	
Housing Material	Low copper content high pressure die-cast aluminum
Lens Material	Clear tempered glass
Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	23 lbs
EPA	Front = 1.34 ft², Side = 0.35 ft², Front 45° = 1.23 ft²
Electrical and Control	
Voltage	100 to 277 volts
Fixture Cable	Power and data in one cable
Conductors	3C #16-3 (LT control) 5C #16-5 (DIM/DTW control) 6C #14-3/ #24-3 (DMX/RDM1, DMX/RDM control)
Control	Lumentalk, Dim to Warm via 0-10V (2700K to 2200K), Dim to Warm via Single-Channel DMX/RDM (2700K to 2200K), DMX/RDM Enabled 3-Channel Color Temperature Control, DALI 2 T8 Enabled Dimming 0.1%
Resolution (DMX/RDM)	Per board or fixture for DMX/RDM control option (configured with LumenID V3 software), Per fixture for DMX/RDM1 control option, 8-bit or 16-bit
Dynamic Warm Color Temperature Mixing	72 LEDs (12x 2200K, 12x 2700K, 12x 3000K per board)
Dynamic White Color Temperature Mixing	72 LEDs (12x 2700K, 12x 4000K, 12x 6500K per board)
Environmental	
Storage Temperature	-40 °F to 185 °F (device must reach start-up temperature value before operating)
Start-up Temperature	-13 °F to 122 °F
Operating Temperature	-40 °F to 122 °F
Ingress Protection Rating	IP66 Wet location rated

Impact Resistance Rating	IK10
Application Wind Speed	Luminaires were designed based on AASHTO 2018 (50 ft, 150 mph) standard to ensure highest quality and safety. Installation should be validated by a local project engineer to ensure the luminaires are suitable for the wind speed and exposure of the specific application. Consult factory for zones with higher wind speeds or higher mounting heights.

Accessories (Order Separately)

Optical Accessories	Snoot, Visor, Linear Spread Lens Adjustable, Wire Guard
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Pharos® Designer Lighting Control Kit (PHAROS), Pharos® Express Control Kit (EXPERT)
Diagnostic and Addressing Tools	LumenID (LID)

Operation and Maintenance

Lumencycle™ Program	Lumencycle-enabled fixtures are designed for serviceability and circular lifecycle management. Lumenpulse will provide factory refurbishment programs, allowing luminaires to be restored and redeployed rather than replaced.
---------------------	--

Important

Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.


Lumencycle™ Program

Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.


Chromaticity Data

TM-30 - DWW

CCT	CIE		TM-30	
DWW	R _a	86	87	R _f
Full Output	R _g	26	97	R _g




DWW Spectral Power Distribution

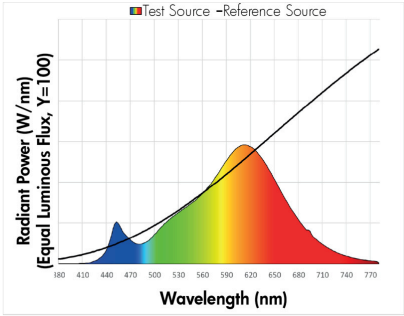


TM-30 - DWH

CCT	CIE		TM-30	
DWH	R _a	81	80	R _f
Full Output	R _g	22	99	R _g




DWH Spectral Power Distribution

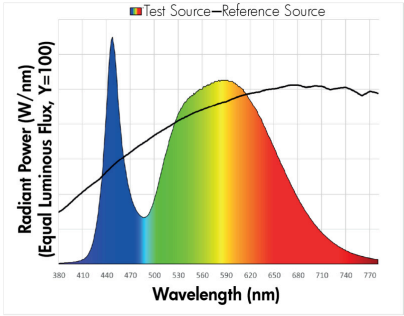


Mounting Options

SM - Surface Mount

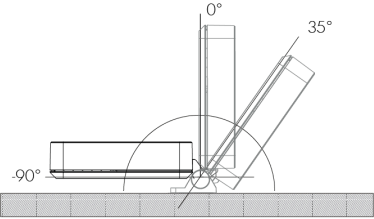


SM - Mounting Hole Pattern

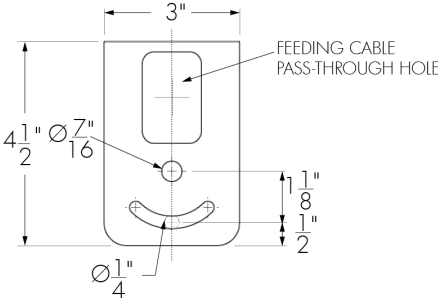


The SM mounting option cannot be interchanged with any other mounting option. All others mountings are interchangeable. Consult factory for details.

WM - Wall Mount Bracket with Decorative Cover

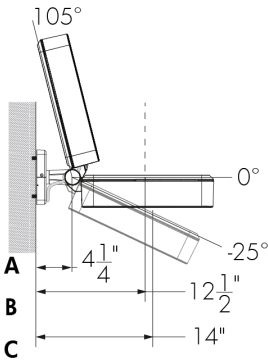


WMNC - Wall Mount Bracket Without Decorative Cover

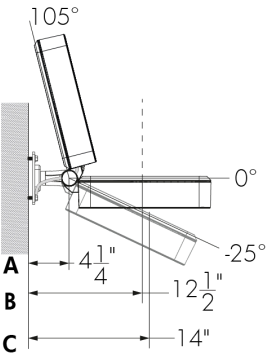


- A - Dimension from wall to pivot.
- B - Dimension from wall to the geometric center of the fixture.
- C - Dimension from wall to the center of the board.

WAM - Wall Mount Bracket With Decorative Cover
6 in, 12 in, 18 in or 24 in

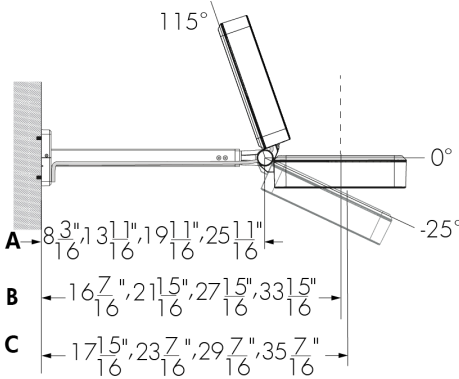


WAMNC - Wall Mount Bracket Without Decorative Cover
Cover 6 in, 12 in, 18 in or 24 in

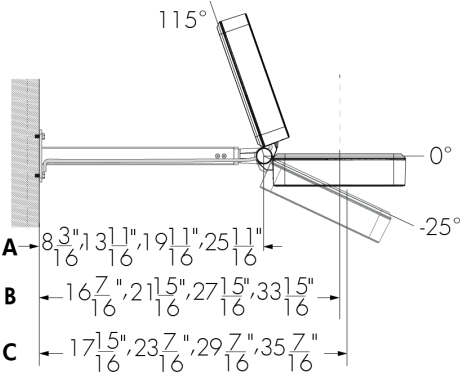


A cable length of 10 ft or greater must be specified for the WAM24 mounting option.

A cable length of 10 ft or greater must be specified for the WAM24 mounting option.

WMRJB - Recessed JBOX Wall Mount With Decorative Cover

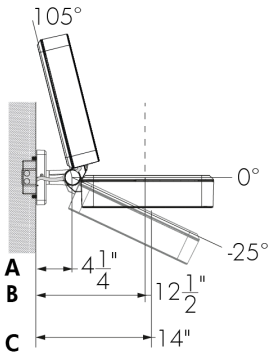


WMRJBNC - Recessed JBOX Wall Mount Without Decorative Cover

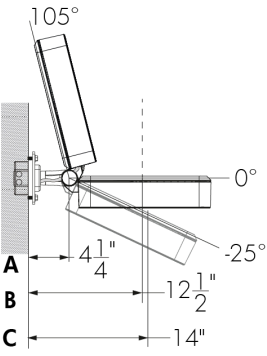

Fixture cable length is determined by Lumenpulse.


Fixture cable length is determined by Lumenpulse.

WAMRJB - Recessed JBOX Wall Arm Mount With
Decorative Cover 6 in, 12 in, 18 in or 24 in

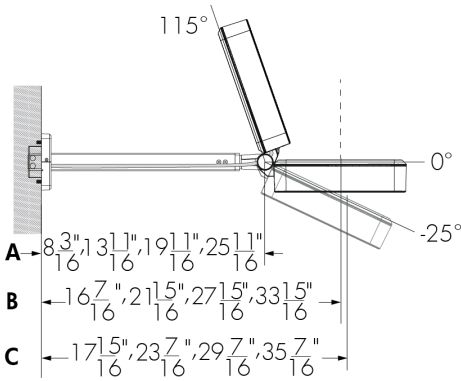


Fixture cable length is determined by Lumenpulse.

Wall Mount Horizontal Pivot Limits

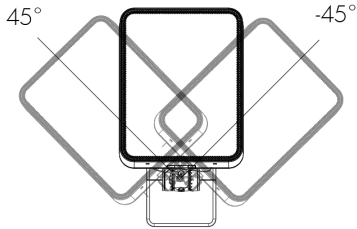


WAMRJBNC - Recessed JBOX Wall Arm Mount
Without Decorative Cover 6 in, 12 in, 18 in or 24 in

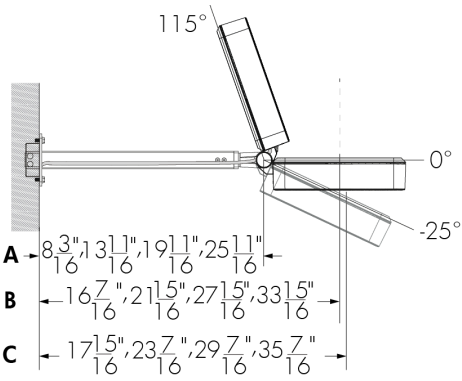

Fixture cable length is determined by Lumenpulse.

WM, WAM, WMRJB and WAMRJB - Mounting Hole
Pattern

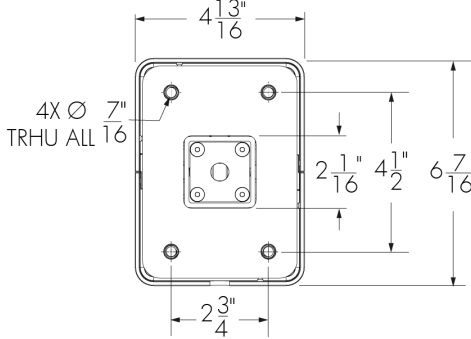


A - Dimension from wall to pivot.


B - Dimension from wall to the geometric center of the fixture.

C - Dimension from wall to the center of the board.

WMNC, WAMNC, WMRJBNC and WAMRJBNC -
Mounting Hole Pattern

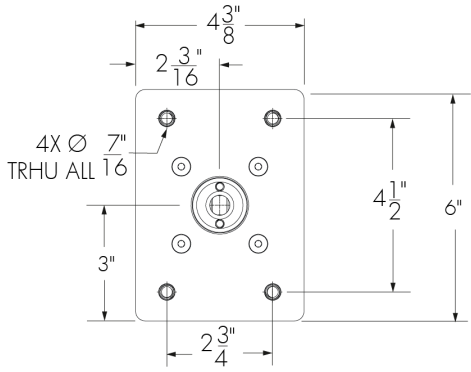


RPM4/1, RPM4.5/1, RPM5/1 - Round Pole Mount

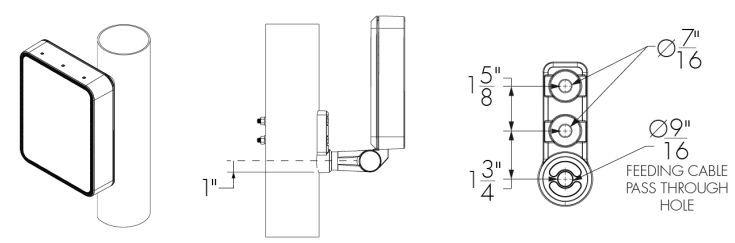


	RPM4/1	RPM4.5/1	RPM5/1
For pole Ø	4" ± 1/16	4.5" ± 1/16	5" ± 1/16
Bolt length	5 1/4	5 3/4	6 1/4

Consult factory for other pole diameters.
Hardware included with accessory.

Round Pole Mount Horizontal Pivot Limits

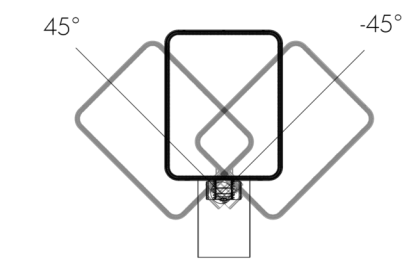


PLTU - Universal Yoke

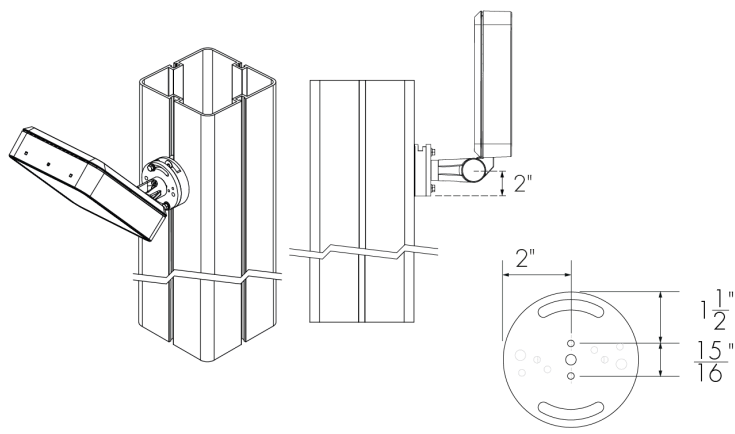

Refer to the Universal Yoke specification sheet and Pole installation instructions for more details. Square Lumentech profile shown.

All mounting options (except for SM mounting) are interchangeable. Consult factory for details.
All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.


RPM4/2, RPM4.5/2, RPM5/2 - Round Pole Mount For Two Fixtures

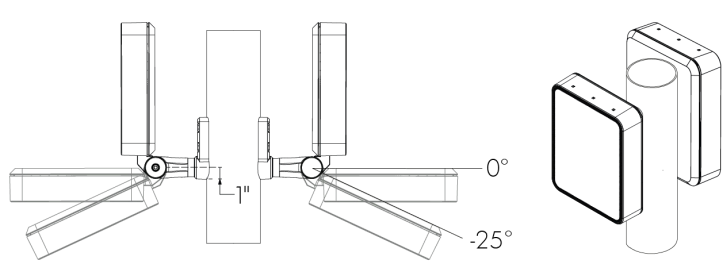

	RPM4/2	RPM4.5/2	RPM5/2
For pole Ø	4" ± 1/16	4.5" ± 1/16	5" ± 1/16
Bolt length	5 3/4	6 1/4	7"


Consult factory for other pole diameters.
Hardware included with accessory.

TN2 - Tenon Adapter For 2 3/8 in O.D. Pole

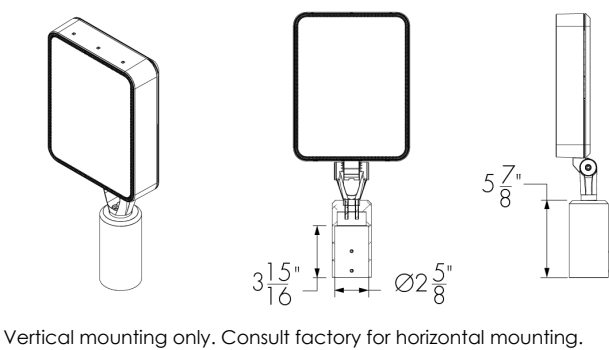


Vertical mounting only. Consult factory for horizontal mounting.

TN4 - Tenon Adapter For 4 in O.D. Pole

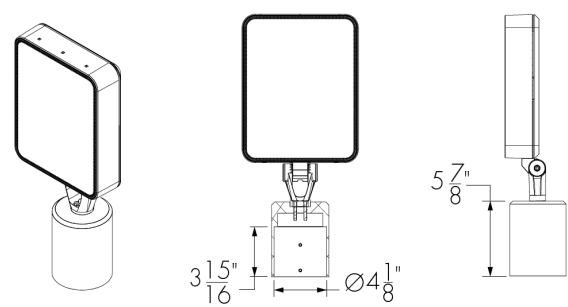

Vertical mounting only. Consult factory for horizontal mounting.


SK - Stake Mount

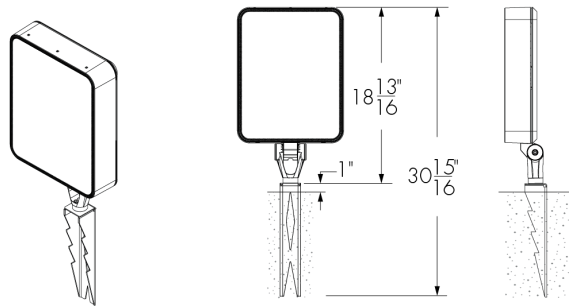

All mounting options (except for SM mounting) are interchangeable. Consult factory for details.
All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.

Optical Options

LSLH - Linear Spread Lens Horizontal Distribution
LSLV - Linear Spread Lens Vertical Distribution

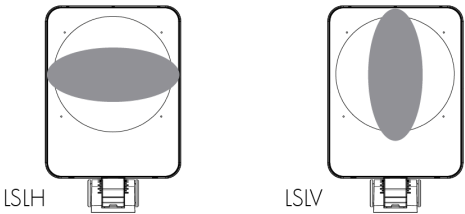


Factory installed, not adjustable on site. LSLH, LSLV not available for WFL, VWFL, NAS and WW optics.

See 'Optical Accessories' section for field adjustable spread lens (LSLA).

	Beam angle with LSLH/LSLV
XN	5° x 60°
VN	7° x 60°
NS	9° x 60°
NF	16° x 65°
M	25° x 66°
FL	35° x 70°

LLF: 0.88*
*LLF may vary slightly by distribution chosen.

HL - Honeycomb Louver




Factory installed, not adjustable on site. HL not available for WFL, VWFL, NAS and WW optics.

The addition of a honeycomb louver will affect beam distribution. Consult factory for application support.

Optical Accessories (Factory Installed, Order Separately)


Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.

SN - Snoot

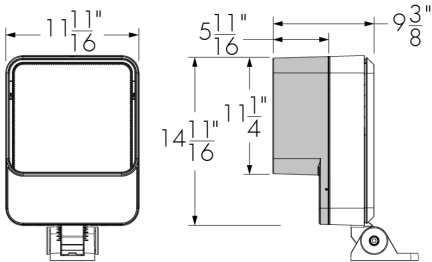

LQGSN-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


VS - Visor

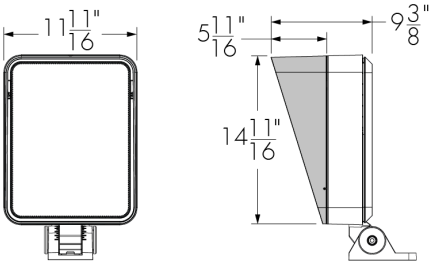

LQGVVS-FINISH-BK-OPTIONS (CRC)
Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


The Visor is not recommended for the WW optic.

LSLA - Linear Spread Lens Adjustable

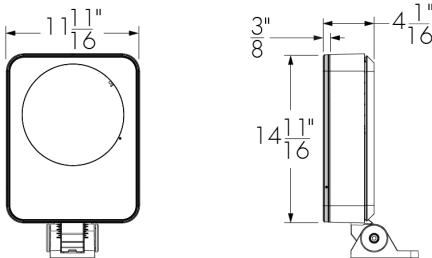

LQGLSLA-FINISH-OPTIONS (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard

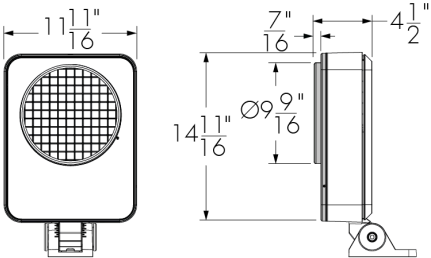

LQGWG-FINISH-OPTIONS (CRC)
Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

	+	Snoot	Visor	Wire guard
Linear spread lens adjustable		YES	YES	NO
Wire guard		YES	YES	N/A

Accessory combinations must be ordered together on a single line. Ex: A snoot + wire guard combination order code is LQGSNWG-BK-BK. A maximum of two accessories can be combined per fixture.


Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)

Diffuser Lens 1 (1 Notch)




147713

Diffuser Lens 2 (2 Notches)




147714

Diffuser Lens 3 (3 Notches)




147715

Diffuser Lens 4 (4 Notches)




147716

Diffuser Lens 5 (5 Notches)



147717

Diffuser Lens 6 (6 Notches)



147718

Final Distribution Using Diffuser Lenses

	Final Distribution Using Diffuser Lens					
Original Distribution on Fixture	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS	NF	M	FL	WFL
VN (6°)	NS					
NS (10°)						
NF (20°)						
M (30°)			FL	WFL		
FL (40°)						
WFL (60°)				VWFL		
VWFL (90°)						


Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LQS**: LQALK-S **LQM**: LQALK-M **LQL**: LQALK-L **LQG**: LQALK-G

The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LQS**: LQSLSLA-FINISH-LQALK **LQM**: LQMLSLA-FINISH-LQALK **LQL**: LQLLSLA-FINISH-LQALK **LQG**: LQGLSLA-FINISH-LQALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.
Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

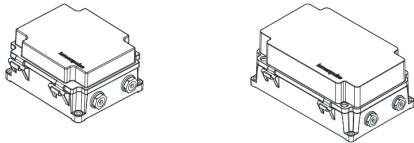

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

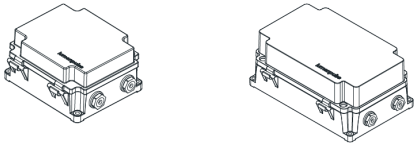

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit

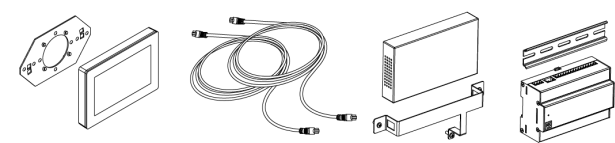

The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

EXPERT - Pharos® Express Control Kit

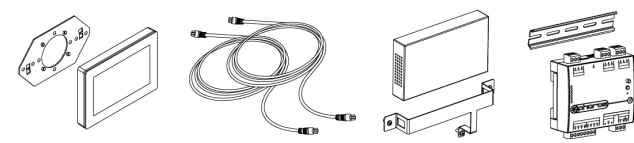

The Pharos Expert Control Kit, available for 1, 2, 4 or 6 DMX universes, allows for complete control of large lighting installations.


Diagnostic And Addressing Tools (Order Separately)

LID - LumenID




The updated LumenID (LID) is an all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Cable option may vary; please consult factory. For complete details, refer to the LID specification sheet.

EPA Guide

	FIXTURE			MOUNTING OPTIONS*			
	LQG	LQG with Snoot	LQG with Visor	WAM/WAMRJB			
					6	12	18
EPA Front (sq ft)	1.336	1.585	1.585	N/A	N/A	N/A	N/A
EPA Side (sq ft)	0.346	1.016	1.016	0.134	0.287	0.440	0.593
EPA Front 45° (sq ft)	1.233	2.06	2.06	N/A	N/A	N/A	N/A


Resolution Details

Resolution Per Board: Each Board is Addressed Independently
DMX Addresses:

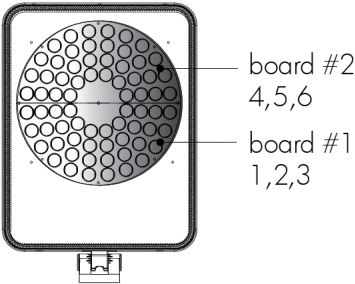


DMX/RDM control option

Resolution Per Fixture: Each Fixture Is Addressed Independently
DMX Addresses:



DMX/RDM1 control option



DMX/RDM control option


Fixture resolution can be configured on-site within the LumenID V3 software.

Typical Wiring Diagrams

Wiring Color Code


UL Color Code	USE
Green	Ground
Black	Line 100-277V AC
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -
Gray	Signal common (DMX/RDM only)

Lumentalk (LT)

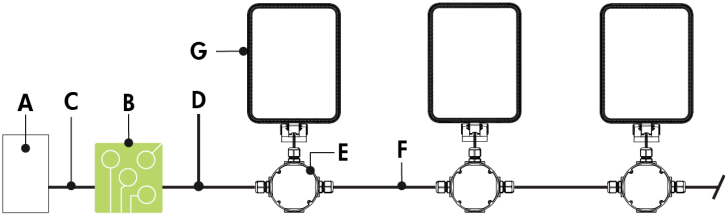

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Lumentranslator 2 (LTL2-DMX)
- C - Data wiring (by others)
- D - Power line (100-277V, wiring by others)
- E - Junction box (by others)
- F - Power wiring (by others)
- G - Lumenquad Grande


Lumentalk (LT) - Wiring Detail

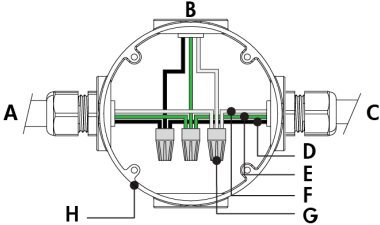

- A - Power input (control over power line via Lumentalk system) or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Wire-nuts (by others)
- H - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system. No third party fixtures allowed on the same circuit.
- 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- 100 watts per fixture.

Dim to Warm Via 0-10V (DIM/DTW*)
*Available For DWW Version Only, 2700K to 2200K

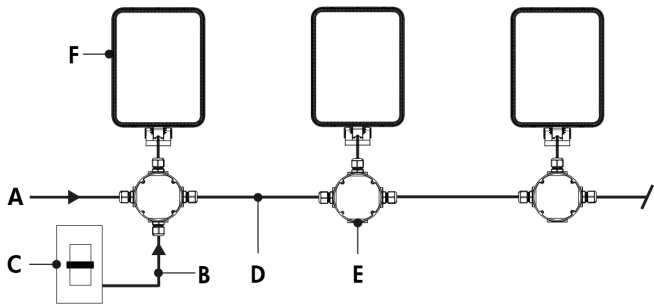

- A - Power input (100-277V, wiring by others)
- B - Data wiring (by others)
- C - Dimmer (by others)
- D - Power and data wiring (by others)
- E - Junction box (by others)
- F - Lumenquad Grande


Dim to Warm Via 0-10V (DIM/DTW) - Wiring Detail

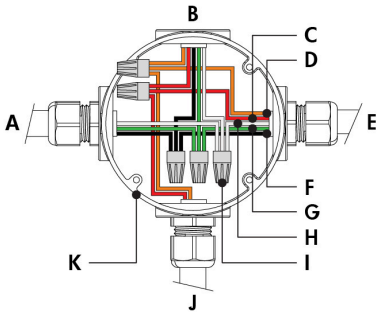

- A - Power input or from previous fixture
- B - To fixture
- C - 0-10 V +
- D - 0-10 V -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Wire-nuts (by others)
- J - From dimmer (by others)
- K - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 0-10V mA ratings: passive dimmer (Current Sink): 3mA per fixture, active dimmer (Current Source): 0.5mA per fixture.
- 71 watts per fixture.

Star Layout (Dim to Warm Via DMX/RDM1* or 3-Channel DMX/RDM)
*Available For DWW Version Only, 2700K To 2200K

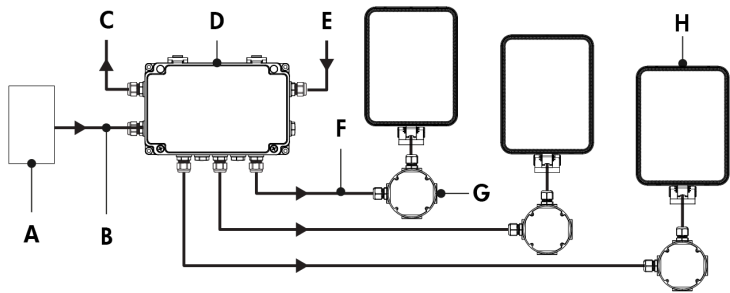

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (100-277V, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenquad Grande

Star Layout (DMX/RDM1 or DMX/RDM) - Wiring Detail



- A - From CBX or previous fixture
- B - Lumenterminator*
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Wire-nuts (by others)
- K - Junction box (by others)

Maximum Fixture Count


Maximum number of fixtures per run (Based on 15A maximum, 16AWG cable, fixtures spaced 10ft on center, first fixture 50ft from CBX)				
Configuration/Voltage	120V	208V	240V	277V
LQG	10	16	18	21

DMX/RDM1 controlled fixtures typically draw less power than DMX/RDM controlled fixtures, consult factory for maximum run length information.

- Refer to CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- DMX/RDM1 control option requires 1 DMX address. DMX/RDM control option requires 3 DMX addresses.
- 71 watts per fixture for DMX/RDM1 control, 100 watts per fixture for DMX/RDM control.


* DMX terminator is required at the end of each run to maintain data integrity. (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.

Daisy Chain Layout (Dim to Warm Via DMX/RDM1* or 3-Channel DMX/RDM)
*Available for DWW Version Only, 2700K to 2200K

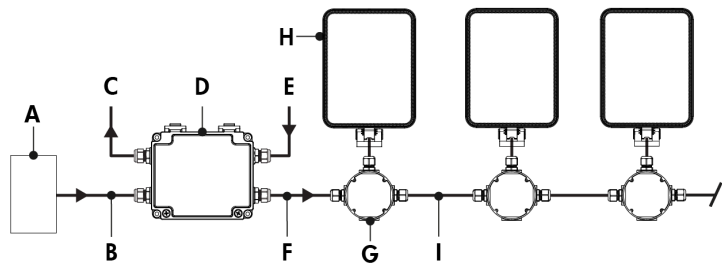

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (100-277V, wiring by others)
- F - Power and data output to fixture (wiring by others)
- G - Junction box (by others)
- H - Lumenquad Grande
- I - Power and data wiring (by others)

Daisy Chain Layout (DMX/RDM1 or DMX/RDM) - Wiring Detail (First or Middle of Run)

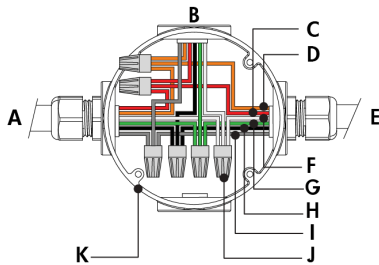


- A - From CBX or previous fixture
- B - To fixture
- C - Data -
- D - Data +
- E - To next fixture
- F - Neutral
- G - Line
- H - Ground
- I - Signal common
- J - Wire-nuts (by others)
- K - Junction box (by others)

Maximum Fixture Count

Maximum number of fixtures per run (Based on 15A maximum, 16AWG cable, fixtures spaced 10ft on center, first fixture 50ft from CBX)				
Configuration/Voltage	120V	208V	240V	277V
LQG	10	16	18	21

DMX/RDM1 controlled fixtures typically draw less power than DMX/RDM controlled fixtures, consult factory for maximum run length information.

Daisy Chain Layout (DMX/RDM1 or DMX/RDM) - Wiring Detail (End of Run)




- A - From CBX or previous fixture
- B - Lumenterminator*
- C - To fixture
- D - Data -
- E - Data +
- F - Neutral
- G - Ground
- H - Line
- I - Signal common
- J - Wire-nuts (by others)
- K - Junction box (by others)

- Refer to CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 3 ft cable length between fixture and next junction box for daisy chain layout.
- DMX/RDM1 control option requires 1 DMX address. DMX/RDM control option requires 3 DMX addresses.
- 71 watts per fixture for DMX/RDM1 control, 100 watts per fixture for DMX/RDM control.


*DMX terminator is required at the end of each run to maintain data integrity. (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.

DALI 2 T8 (DALIT8)

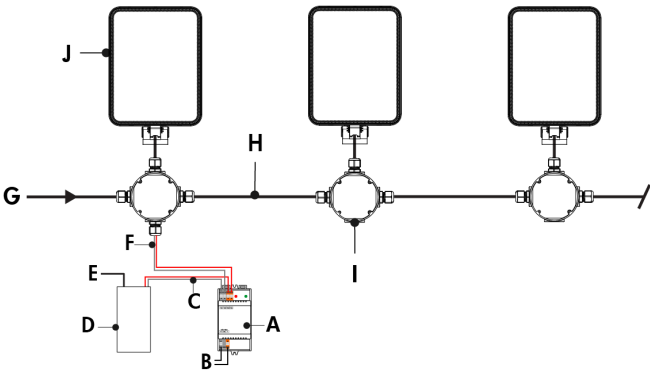

- A - DALI bus power supply
- B - Power input for DALI bus power supply (wiring by others)
- C - Data output to DALI controller (by others)
- D - DALI controller (by others)
- E - Power input for DALI controller (if required, wiring by others)
- F - Data output to fixture
- G - Power input (100-277V)
- H - Power and data wiring (by others)
- I - Junction box (by others)
- J - Lumenquad (LQL-DALIT8)

DALI 2 T8 (DALIT8) - Wiring Detail

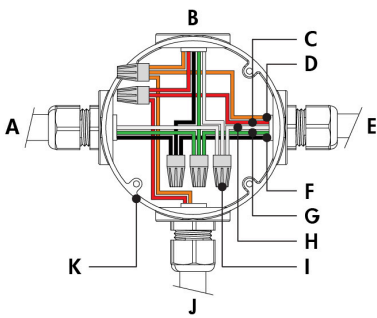

- A - Power input or from previous fixture
- B - To fixture
- C - DA +
- D - DA -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Wire-nuts (by others)
- J - From DALI controller (by others)
- K - Junction box (by others)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- 100 watts per fixture.
- The Lumenquad Large responds to RGBWAF controls.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.

How to Order

Housing	Voltage	Color and Color Temperature	Optic1	Optic2	Optical Option ⁽⁴⁾
LQG Lumenquad Grande ⁽¹⁾	100 100 Volts 120 120 Volts 208 208 Volts 220 220 Volts 240 240 Volts 277 277 Volts	DWW Dynamic Warm White (2200K to 3000K) DWH Dynamic White (2700K to 6500K)	XN Extra Narrow 4° ⁽²⁾ VN Very Narrow 6° ⁽²⁾ NS Narrow Spot 10° ⁽²⁾ NF Narrow Flood 20° ⁽²⁾ M Medium 30° ⁽²⁾ FL Flood 40° ⁽²⁾ WFL Wide Flood 60° ⁽²⁾ ⁽³⁾ VWFL Very Wide Flood 90° ⁽²⁾ ⁽³⁾ NAS Narrow Asymmetric ⁽²⁾ WW Asymmetric Wallwash ⁽²⁾	XN Extra Narrow 4° ⁽²⁾ VN Very Narrow 6° ⁽²⁾ NS Narrow Spot 10° ⁽²⁾ NF Narrow Flood 20° ⁽²⁾ M Medium 30° ⁽²⁾ FL Flood 40° ⁽²⁾ WFL Wide Flood 60° ⁽²⁾ ⁽³⁾ VWFL Very Wide Flood 90° ⁽²⁾ ⁽³⁾ NAS Narrow Asymmetric ⁽²⁾ WW Asymmetric Wallwash ⁽²⁾	LSLH Linear Spread Lens Horizontal Distribution ⁽⁵⁾ LSLV Linear Spread Lens Vertical Distribution ⁽⁵⁾ HL Honeycomb Louver ⁽⁵⁾

Notes:

1. Consult factory for products that are BAA-approved (Buy American Act).

2. Factory installed, not interchangeable on site.

3. Cannot be combined with other optics.
4. Optical options are factory installed and cannot be changed in the field.

5. Not available with WFL, VWFL, NAS and WW optics.

How to Order

Mounting Options ⁽⁶⁾ ⁽⁷⁾	Finish	Control	Option	Certification	Cable Length ⁽¹⁴⁾ ⁽²¹⁾ ⁽²³⁾
SM Surface Mount	BK Black Sandtex®	LT Lumentalk ⁽¹³⁾	CRC Corrosion-Resistant Coating ⁽¹⁷⁾ ⁽¹⁸⁾	UL UL Compliant	3FT 3 ft ⁽¹⁴⁾ ⁽²²⁾
WM Wall Mount Bracket with Decorative Cover	BRZ Bronze Sandtex®	DIM/DTW Dim to Warm via 0-10V (2700K to 2200K) ⁽¹⁴⁾		CE CE Compliant ⁽¹⁹⁾	10FT 10 ft
WMNC Wall Mount Bracket without Decorative Cover	SI Silver Sandtex®	DMX/RDM1 Dim to Warm via Single- Channel DMX/RDM (2700K to 2200K) ⁽¹⁴⁾ ⁽¹⁵⁾ ⁽¹⁶⁾		CEII CE Compliant Class II Double Insulated ⁽¹⁹⁾ ⁽²⁰⁾	20FT 20 ft
WAM6 Wall Arm Mount 6 in with Decorative Cover	WH Smooth White	DMX/RDM 3-Channel Color Temperature Control via DMX/RDM ⁽¹⁵⁾ ⁽¹⁶⁾			30FT 30 ft
WAM6NC Wall Arm Mount 6 in without Decorative Cover	BKTX Textured Black	DALI8 DALI 2 T8 Enabled Dimming 0.1%			50FT 50 ft
WAM12 Wall Arm Mount 12 in with Decorative Cover	BRZTX Textured Bronze Non-Metallic				70FT 70 ft
WAM12NC Wall Arm Mount 12 in without Decorative Cover	GRATX Textured Medium Gray				100FT 100 ft
WAM18 Wall Arm Mount 18 in with Decorative Cover	GRNTX Textured Green				
WAM18NC Wall Arm Mount 18 in without Decorative Cover	WHTX Textured White				
WAM24 Wall Arm Mount 24 in with Decorative Cover ⁽⁸⁾	CC Custom Color & Finish ⁽¹⁰⁾ ⁽¹¹⁾ ⁽¹²⁾				
WAM24NC Wall Arm Mount 24 in without Decorative Cover ⁽⁸⁾					
WMRJB Recessed JBOX Wall Mount with Decorative Cover					
WMRJBNC Recessed JBOX Wall Mount without Decorative Cover					
WAMRJB6 Recessed JBOX Wall Arm Mount 6 in with Decorative Cover					
WAMRJB6NC Recessed JBOX Wall Arm Mount 6 in without Decorative Cover					
WAMRJB12 Recessed JBOX Wall Arm Mount 12 in with Decorative Cover					
WAMRJB12NC Recessed JBOX Wall Arm Mount 12 in without Decorative Cover					
WAMRJB18 Recessed JBOX Wall Arm Mount 18 in with Decorative Cover					
WAMRJB18NC Recessed JBOX Wall Arm Mount 18 in without Decorative Cover					
WAMRJB24 Recessed JBOX Wall Arm Mount 24 in with Decorative Cover					
WAMRJB24NC Recessed JBOX Wall Arm Mount 24 in without Decorative Cover					

RPM4/1 Round Pole Mount 4 in					
RPM4.5/1 Round Pole Mount 4.5 in					
RPM5/1 Round Pole Mount 5 in					
RPM4/2 Round Pole Mount 4 in for two fixtures					
RPM4.5/2 Round Pole Mount 4.5 in for two fixtures					
RPM5/2 Round Pole Mount 5 in for two fixtures					
PLTU Lumentech Pole Mount ⁽⁹⁾					
TN2 Tenon Adapter for 2 3/8 in O.D. Pole					
TN4 Tenon Adapter for 4 in O.D. Pole					
SK Stake Mount					

Notes:

6. All mounting options (except for SM mounting) are interchangeable. Consult factory for details.

7. All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.

8. A cable length of 10 ft or greater must be specified.

9. Available for Lumentech poles with a square or round profile. A PLTU - Universal Yoke accessory must be ordered with the Lumentech pole for the Lumentech to fit with the PLTU mounting option. Refer to Lumentech specification sheet and installation instructions for more details.

10. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.

11. Setup charges apply for RAL colors. Consult factory for details.

12. Longer lead times can be expected for custom RAL color finishes.

13. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.
14. Available for DWW color temperature option only.

15. A control box (CBX) and LumenID (LID) must be specified.

16. Maximum of 3 ft cable length for daisy chain DMX applications with CBX-DS.

17. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.

18. Setup charges apply. Consult factory for details.

19. Consult European specification sheets and installation instructions for CE and CE Class II wiring information.

20. Available for 220 or 240 volts only.

21. Not applicable to WMRJB, WMRJBNC and WAMRJB 6 in to 24 in mounting options (with or without decorative cover). Cable lengths for these mounting options are determined by the length of the mounting bracket.

22. Not available with WAM24 or WAM24NC mounting options.

23. UL fixtures specified with a Smooth white finish and a SM, WM, WMNC, or WAM 6 in to 24 in mounting option (with or without decorative cover) are provided with a white cable. A black cable is provided for all other fixture configurations.