



30W SMD LED UGR19 downlight with adjustable CCT, IP44.

Complete with 700mA driver.


Complies with standard EN60598-1 and any other specific standards.




## Downloads



## Dimensions

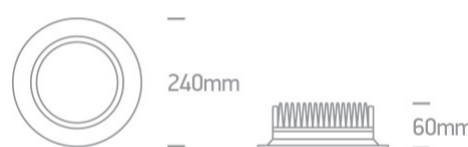

## Gallery

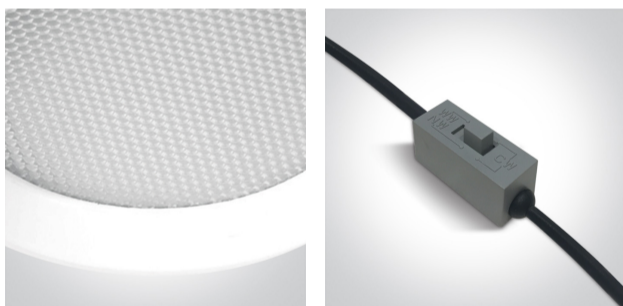




## Physical Specification

Item Group	06 Downlights Fixed LED
Family	UGR19 Adjustable CCT Range
Order Code	10130UV/W
Colour	White
Material	Die Cast
Shape	Circular
Height	60mm

Diameter	240mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No
IK Rating	4

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	40V
Safety Class	
Power(Watts)	28W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835

LED Brand
F Mark

Epistar



## Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
700mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand
Protection

Led Driver
220-240V
Yes
Yes
17,5-29,4W
0,9
Yes
25-42V
IP44

No
Plastic
Cable
Lifud
Short Circuit and Overload

## Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram
UGR

3000K-4000K-6000K
2250lm
75lm/W
80

19

## Packing Info

Pcs/Carton
------------

20
----


Barcode

5291889065326

HS Code

9405409900

## Energy Label

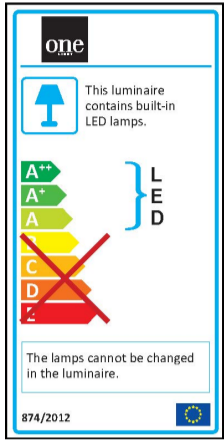

## Certification & Warranty

Warranty

3 Years

Average Lifetime

30000hrs

Weee Directive

Yes