



Assembly Instructions

January 2021


Assembly Instructions

Content

General	Page	3
GRID Basic Module	Page	4
Cross Brace	Page	5
Shelf/Side	Page	6
Top/Base/Side Panel	Page	10
Plinth	Page	13
Castors	Page	14
Legs	Page	15
Storage	Page	16
Glass Door	Page	22
Whiteboard-/Cork-/Felt Panel	Page	24
Felt Side	Page	25
Box Side Panel	Page	26
Top Box	Page	27
Plant Box Insert	Page	28
Double Side	Page	29
Magazine Shelf	Page	30
Divider Insert	Page	32
Seat	Page	34
Hanger Kit	Page	34
Hanger	Page	35
How to assemble a configuration	Page	36

General

GRID Basic Module

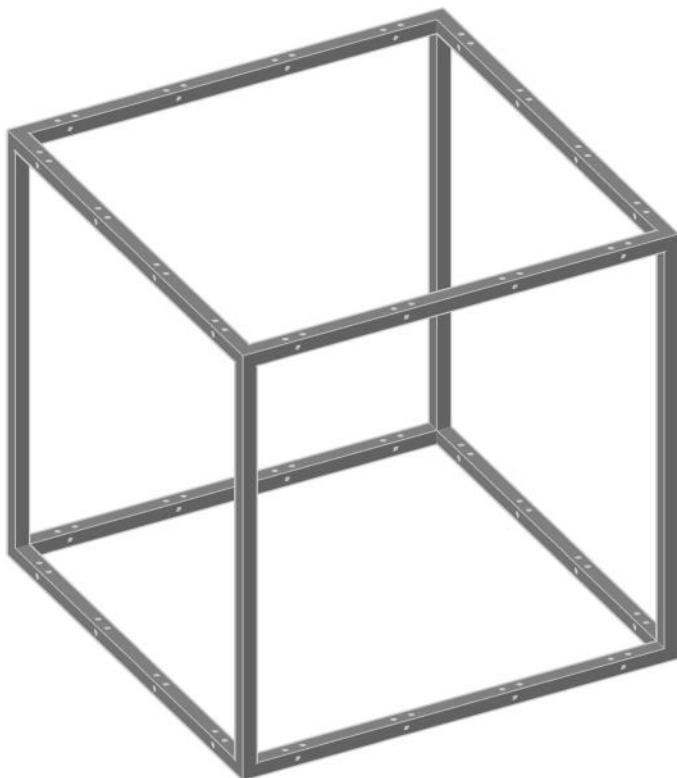

Turn the GRID Basic Module until sides without holes are positioned vertically.


Always build from the bottom up.

Tool



Use a screwdriver with the supplied bit.

Screws

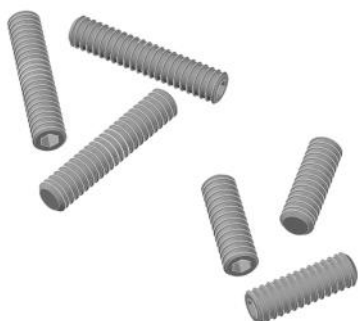

Standard GRID screw:
4x20mm set screw in stainless steel.


Use the Standard GRID screw unless otherwise specified.

Short GRID screw:
4x12mm set screw in stainless steel.

Use Short GRID screws for clear, frosted or mirror Side/Shelf.

GRID Basic Module


GRID Basic Module, stacked

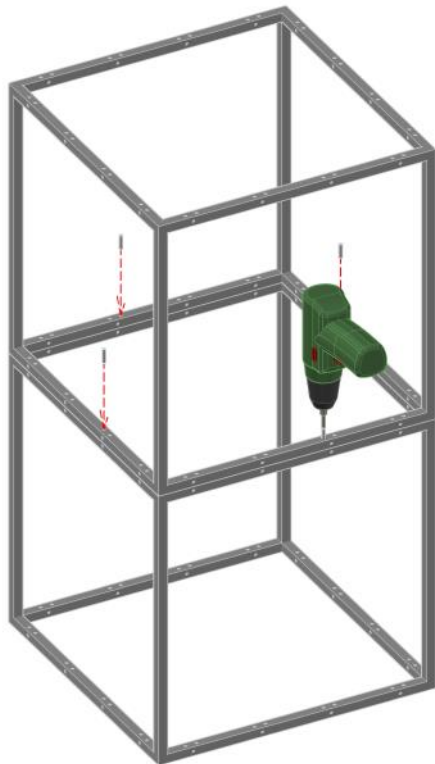

Screw 4 Standard GRID screws into the frame as illustrated.

The GRID screws must be flush with the surface.

GRID Basic Module, side by side

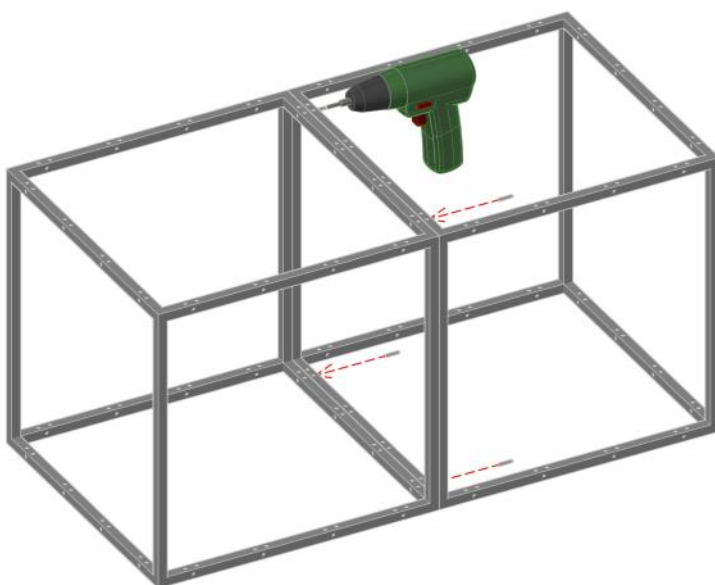


Screw 4 Standard GRID screws into the frame as illustrated.

The GRID screws must be flush with the surface.

Cross Brace


Cross Brace, clicked into the frame

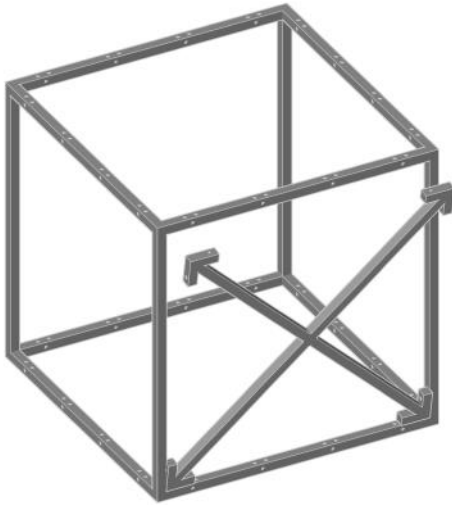


Cross Braces are used vertically only.

Turn the cross braces until the small plastic knobs point up and down respectively.

Push the Cross Brace into the frame making sure the plastic knobs meet the mounting holes of the module.

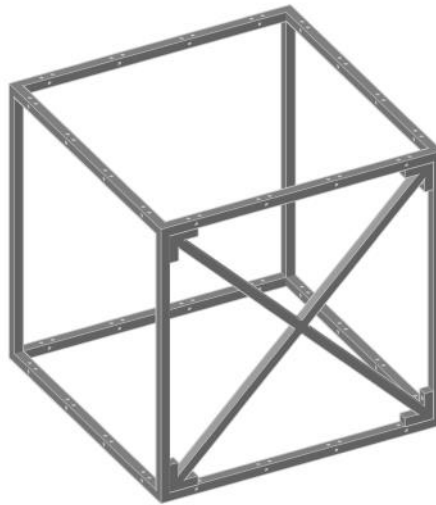

Cross Brace, screwed into the frame

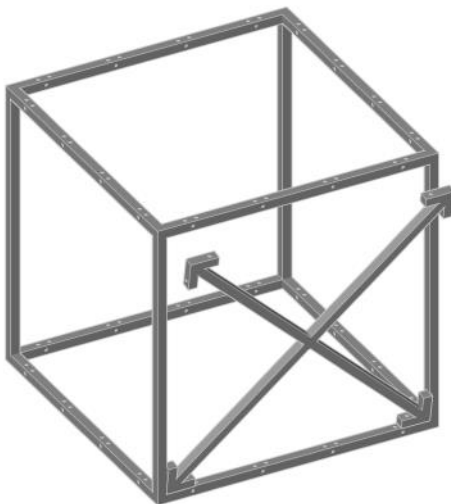


Turn the Cross Braces until the mounting holes point up and down respectively.

Push the Cross Brace into place.


Screw 4 Standard GRID screws into the frame as illustrated.

The GRID screws must be flush with the surface.

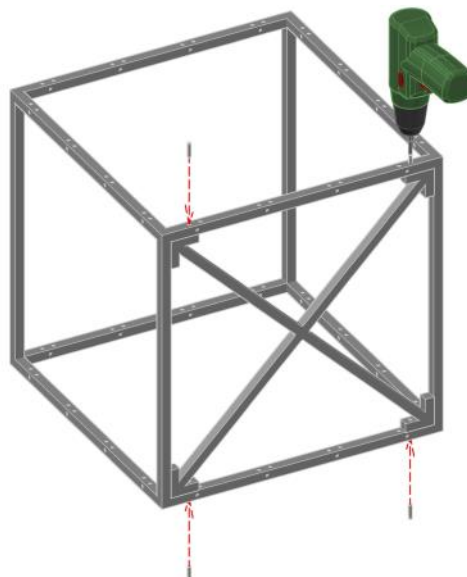

Shelf/Side

Laquered/veneered MDF, mounted as shelf

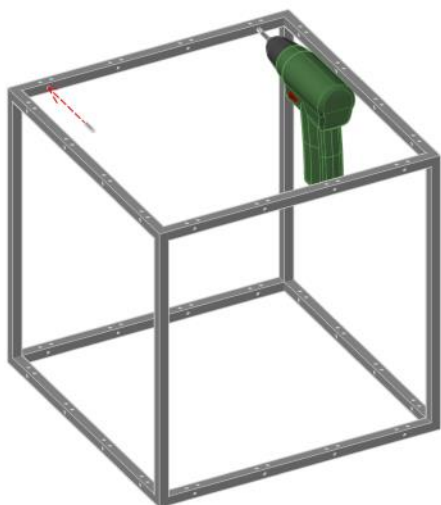

Screw 2 Standard GRID screws into the rear frame as illustrated.

The GRID screws should be protruding approx. 10mm.



Slide the Shelf/Side over the screws and push into place.




Screw 2 Standard GRID screws into the front frame as illustrated.

The GRID screws must be flush with the surface.


Shelf/Side

Laquered/veneered MDF, mounted as side

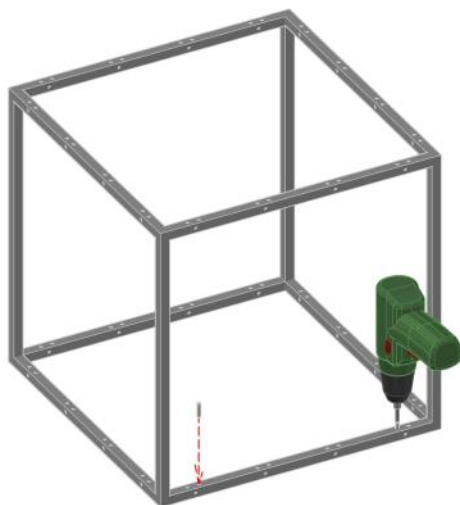


Screw 2 Standard GRID screws into the frame as illustrated.

The GRID screws should be protruding approx. 10mm.

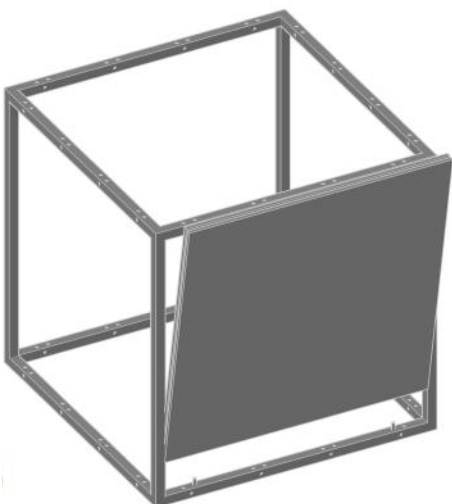

Slide the Shelf/Side over the screws and push into place.

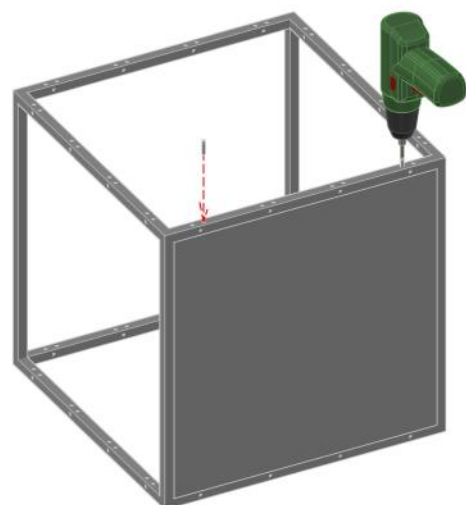


Screw 2 Standard GRID screws into the front frame as illustrated.

The GRID screws must be flush with the surface.

Shelf/Side

Clear/frosted/mirror, mounted as shelf

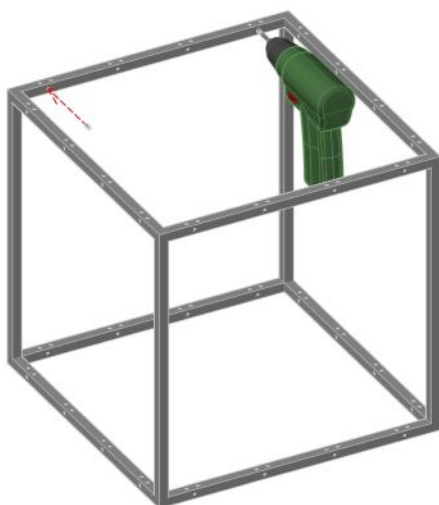


Screw 2 Short GRID screws into the rear frame as illustrated.

The GRID screws should be protruding approx. 10mm.



Slide the Shelf/Side over the screws and push into place.

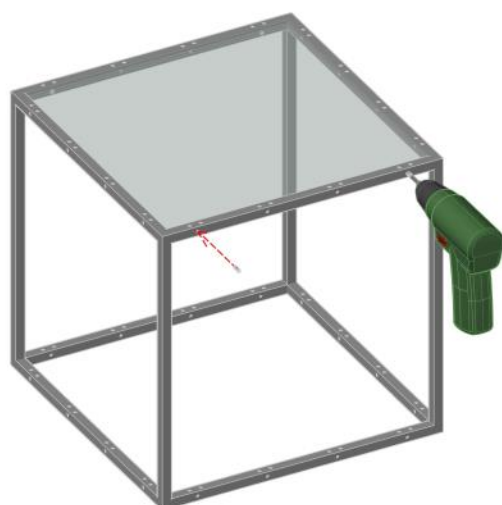


Screw 2 Short GRID screws into the front frame as illustrated.

Screw the GRID screws into the frame until you feel that the shelf is firmly fixed.


Shelf/Side

Clear/frosted/mirror, mounted as side

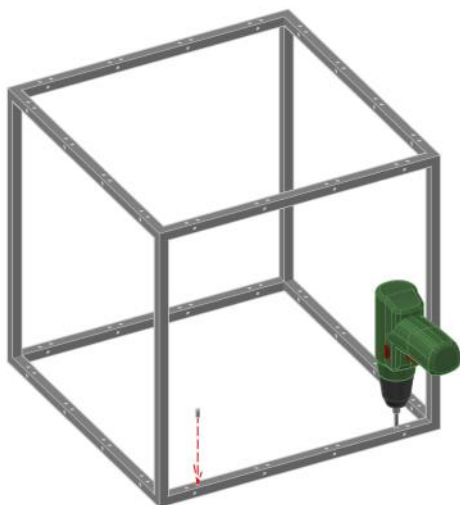


Screw 2 Short GRID screws into the base frame as illustrated.

The GRID screws should be protruding approx. 10mm.

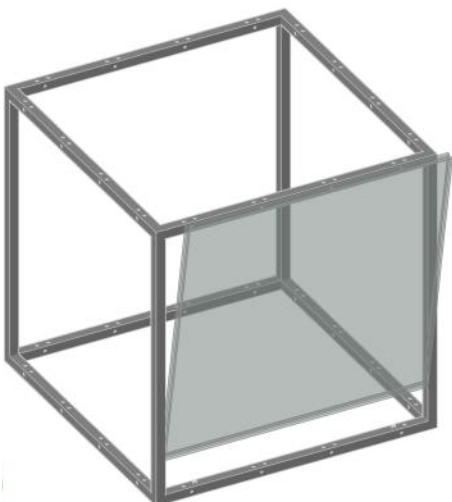

Slide the Shelf/Side over the screws and push into place.

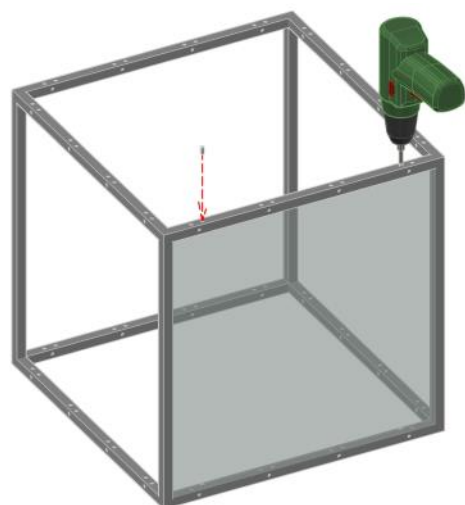


Screw 2 Standard GRID screws into the front frame as shown.


Screw the GRID screws into the frame until you feel the shelf is firmly fixed.

Top/Base/Side Panel

Mounted as Top Panel

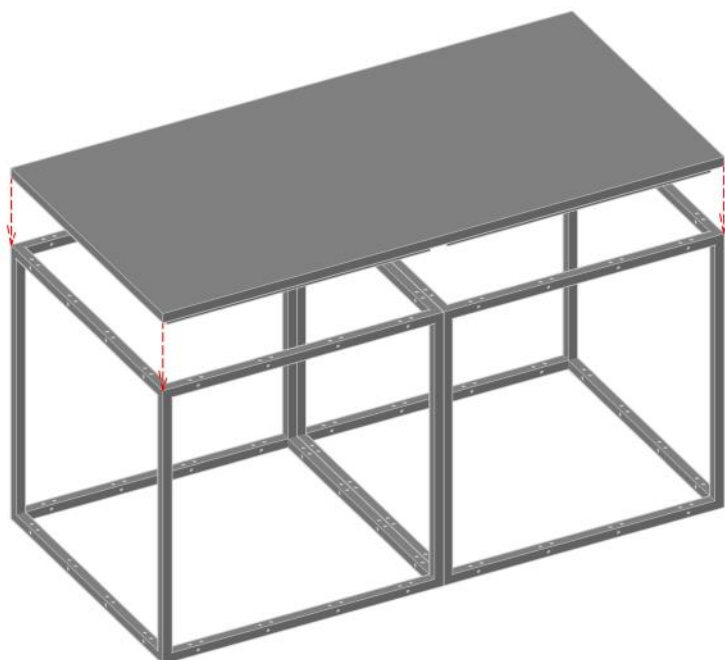

Place the Top Panel on the GRID modules and push into place.

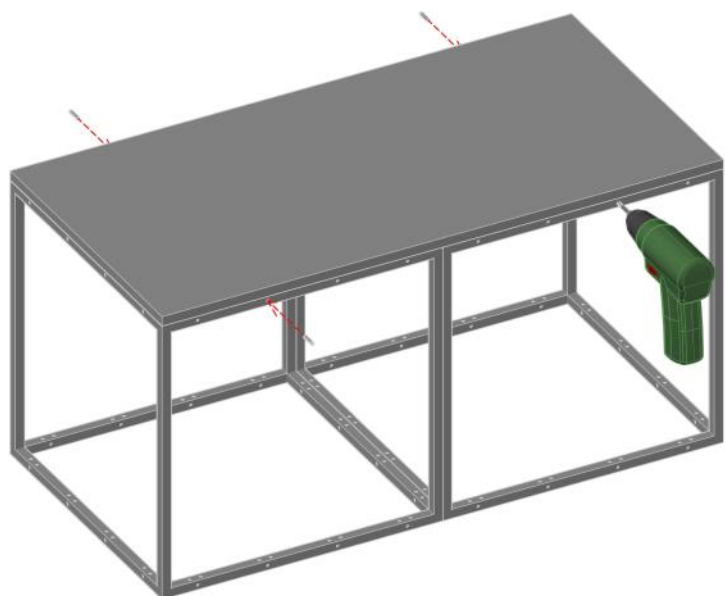


Screw 4 Standard GRID screws into the top frame as illustrated.

The GRID screws must be flush with the surface.


Top/Base/Side Panel

Mounted as Side Panel

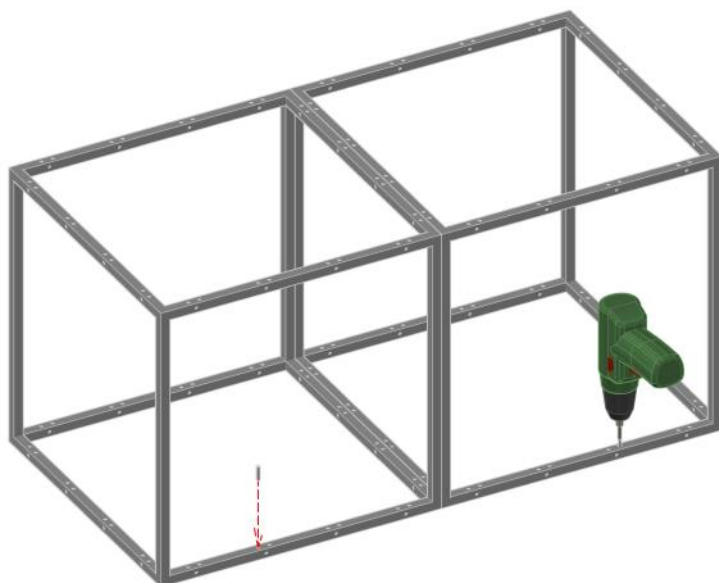


Screw 2 Standard GRID screws into the base frame as illustrated.

The GRID screws should be protruding approx. 10mm.

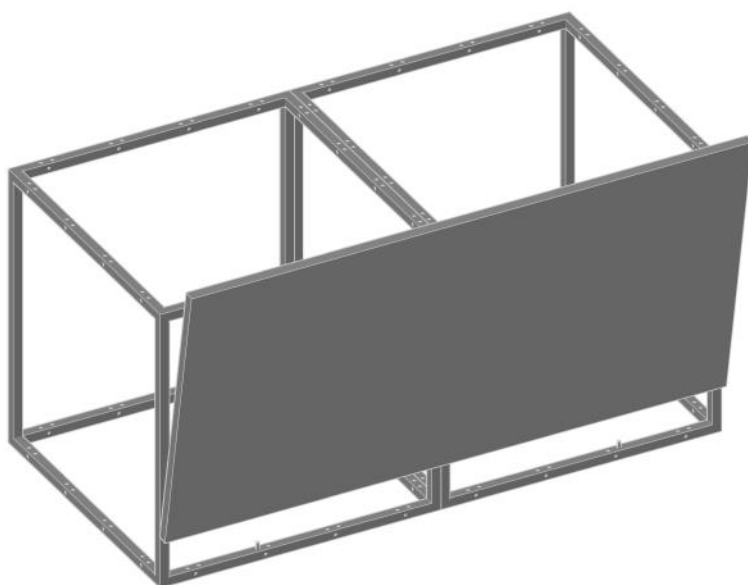

Push the Side Panel into place over the screws.

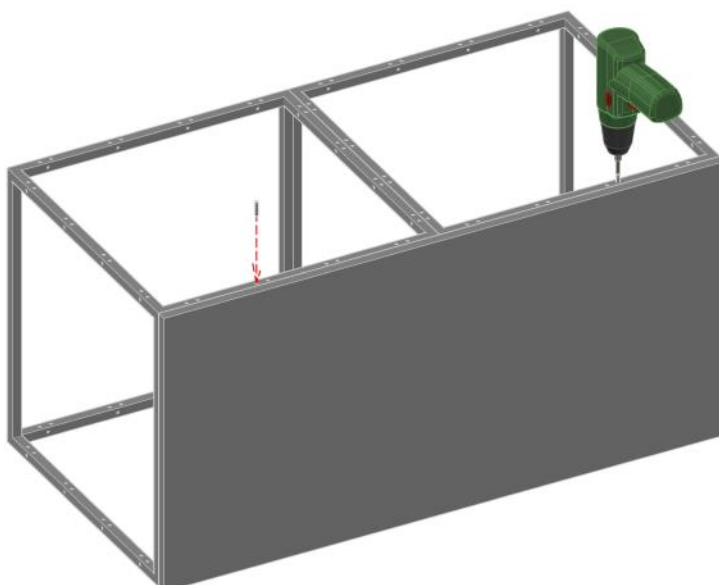


Screw 2 Standard GRID screws into the top frame as illustrated.


The GRID screws must be flush with the surface.

Top/Base/Side Panel

Mounted as Base Panel

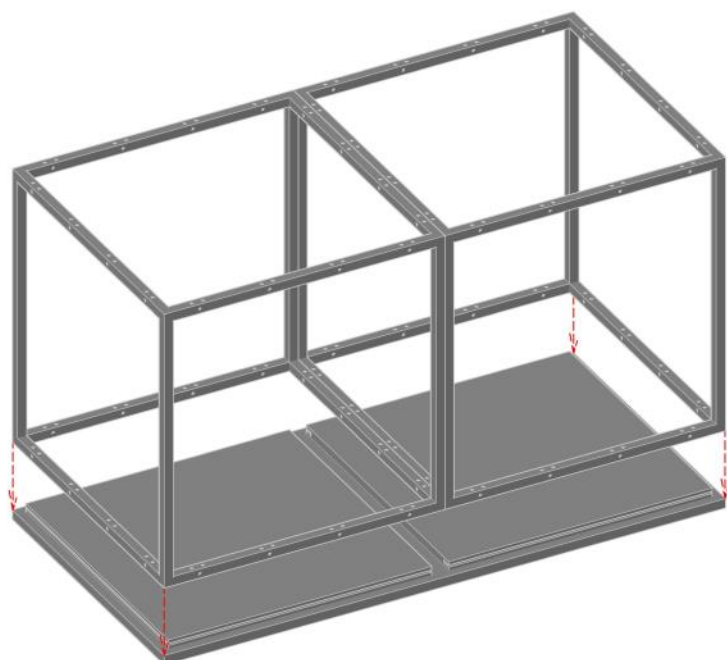

Place the GRID modules on top of the Base Panel and push into place.

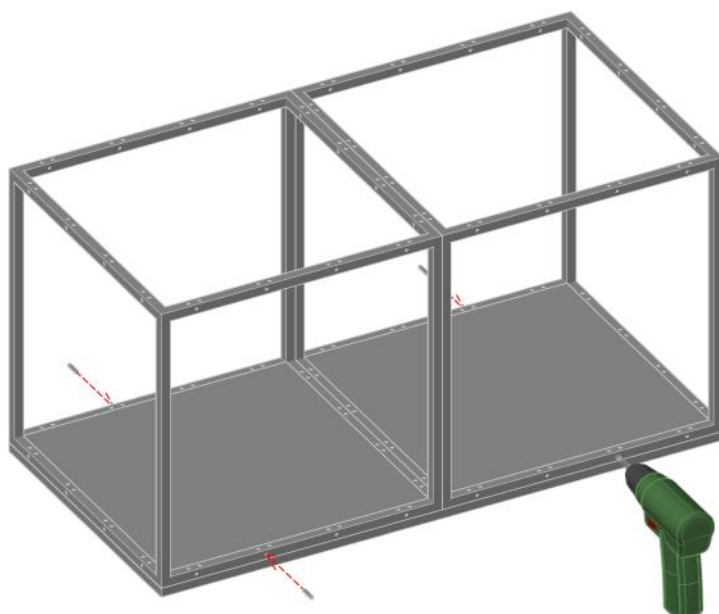


Screw 4 Standard GRID screws into the base frame as illustrated.

The GRID screws must be flush with the surface.

Plinth

Plinth

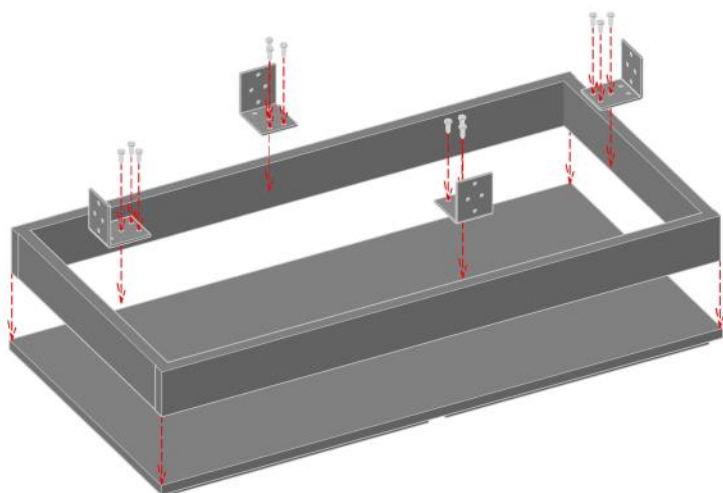


Place the Plinth centered onto the flat side of the Base Panel.

Position the brackets as shown.


Please note dimensions on the drawings below.

Screw the brackets into the Base Panel as illustrated, using the screws supplied.

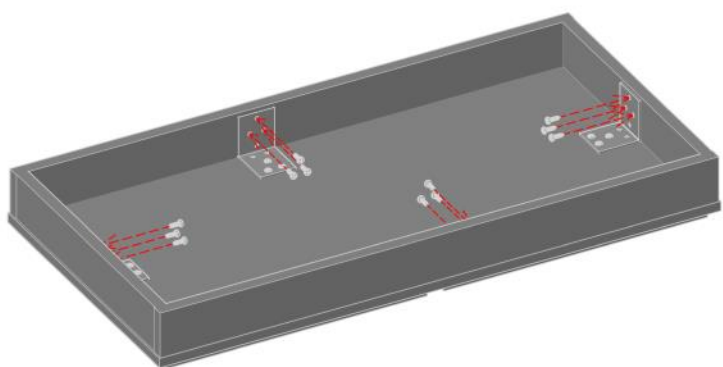


Screw the brackets to the Plinth as illustrated, using the screws supplied.


Plinth for 1 module




Plinth for 4 modules

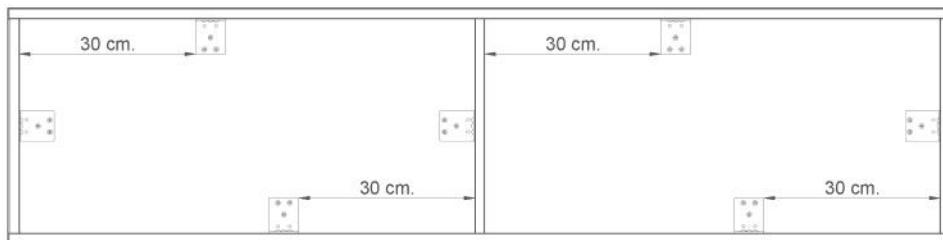

Plinth for 2 modules

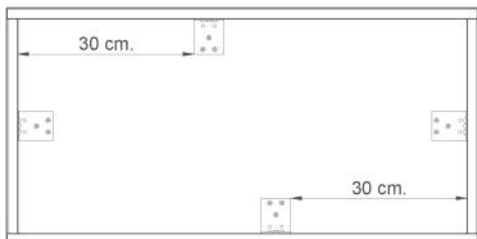


Plinth for 3 modules

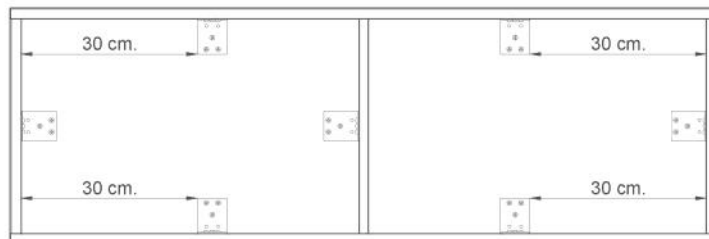

Castors


Set of Castors for 1 module

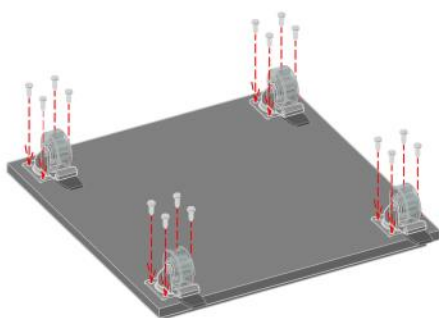

Position the castors on the flat side and in the corners of the Base Panel, 2,5cm from the edges.


Screw on the castors as illustrated, using the screws supplied.

Set of Castors for 2, 3 and 4 modules

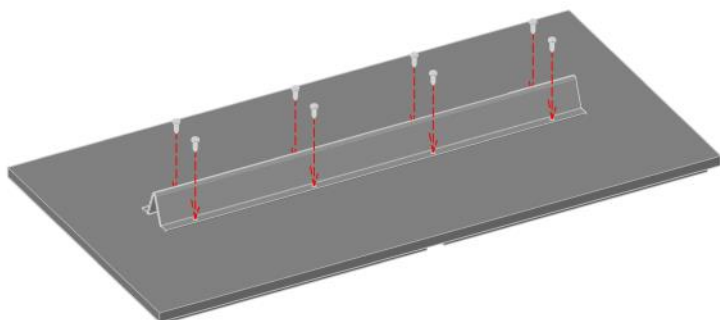

Position the cross beam centered on the flat side of the Base Panel.

Screw on the cross beam as illustrated, use all mounting holes and the screws supplied.

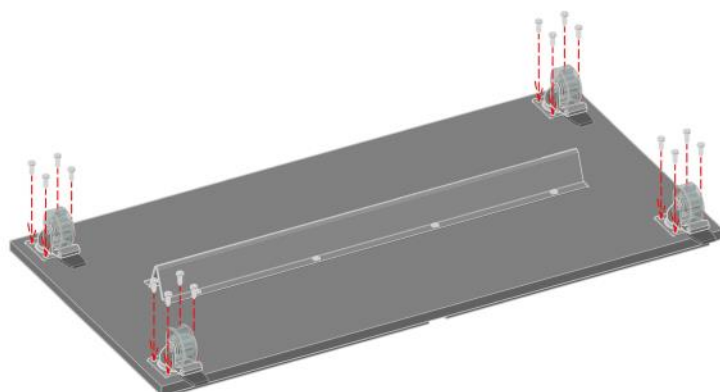


Position the castors on the flat side and in the corners of the Base Panel, 2,5cm from the edges.

Screw on the castors as illustrated, using the screws supplied.

Legs

Set of adjustable Legs for 1 module

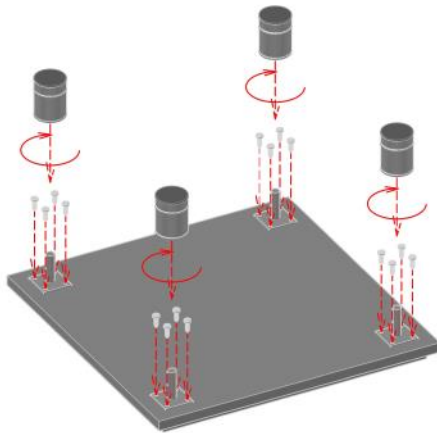


Unscrew the legs from the base fittings.

Position the base fittings on the flat side and in the corners of the Base Panel, 2,5cm from the edges.

Screw on the base fittings as illustrated, using the screws supplied.


Screw the legs back on to the base fittings.

Set of adjustable legs for 2, 3 and 4 modules

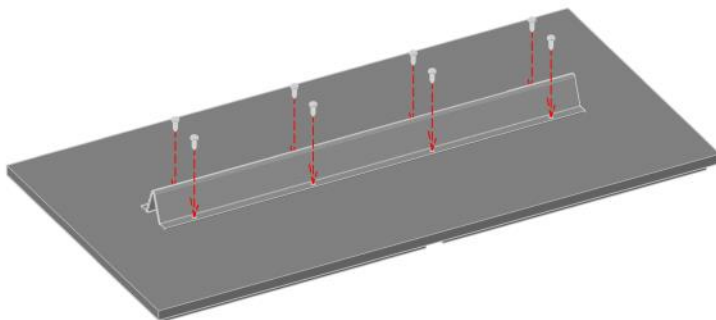

Position the cross beam centered on the flat side of the Base Panel.

Screw on the cross beam as illustrated, use all mounting holes and the screws supplied.

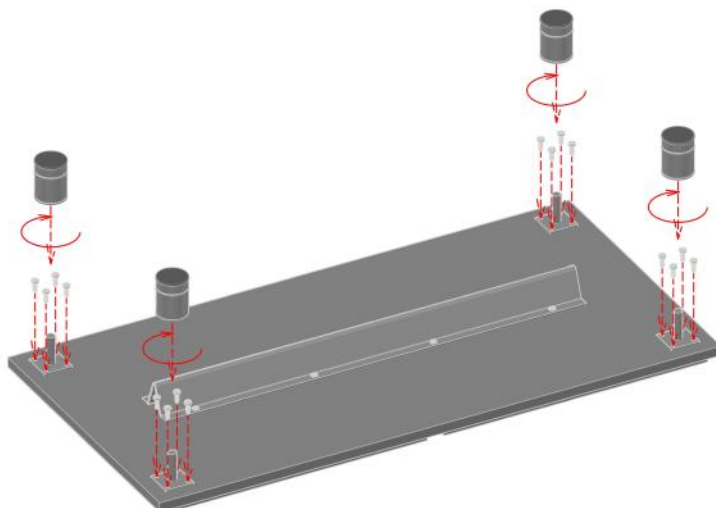

Unscrew the legs from the base fittings.


Position the base fittings on the flat side and in the corners of the Base Panel, 2,5cm from the edges.

Screw on the base fittings as shown, using the screws supplied.

Screw the legs back on to the base fittings.


Storage

Drawer Insert

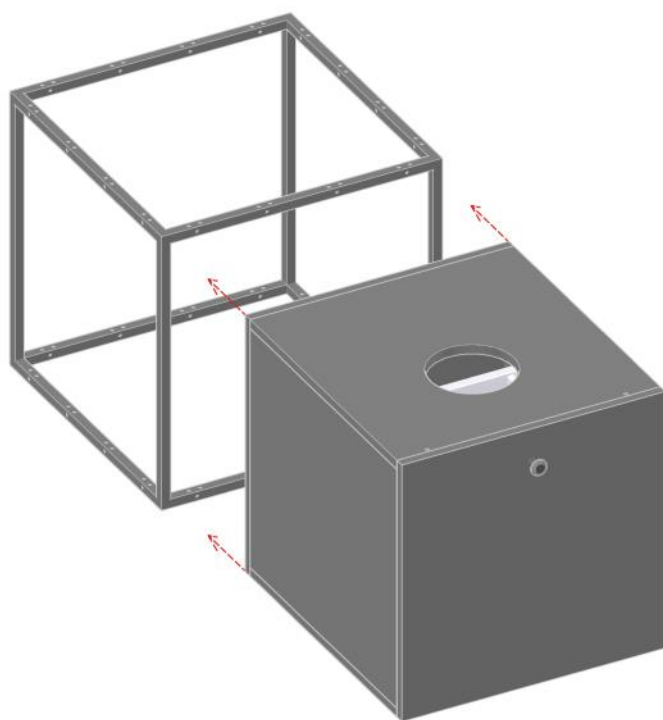

Push the Drawer Insert into the GRID module.

Handling of the Drawer Insert is easy when using the cutout on top as a handle.

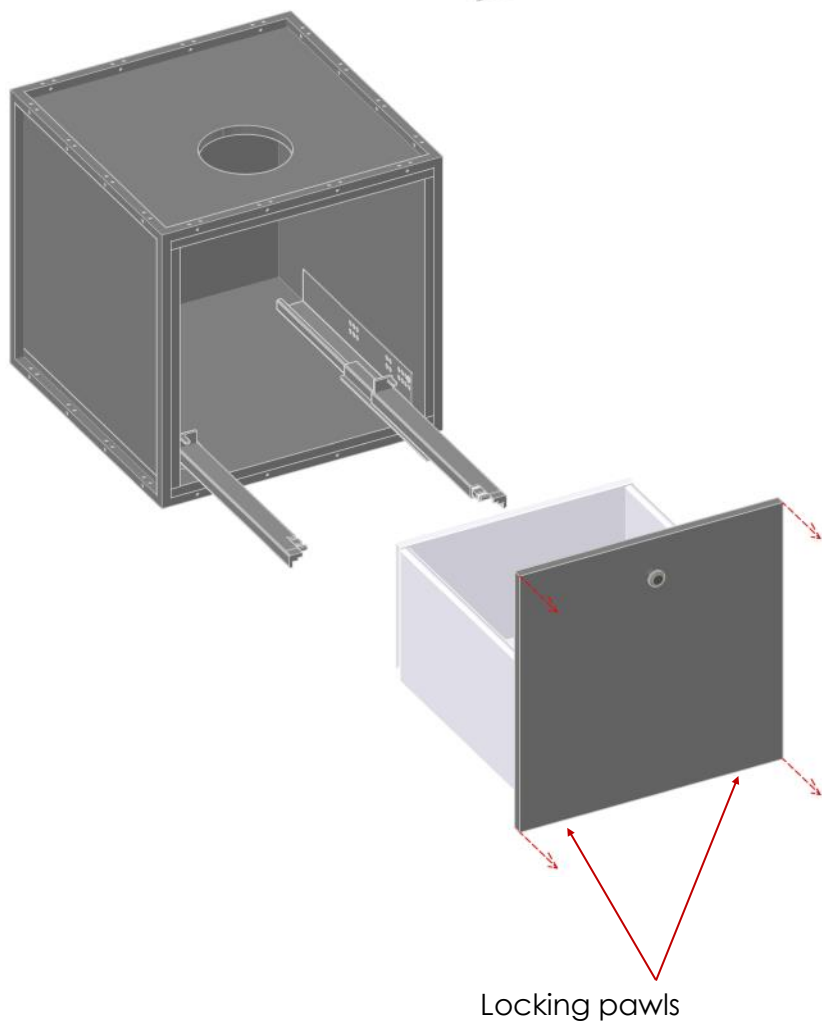


Remove the drawer by releasing the 2 locking pawls underneath the drawer, see photo.



Storage

Drawer Insert

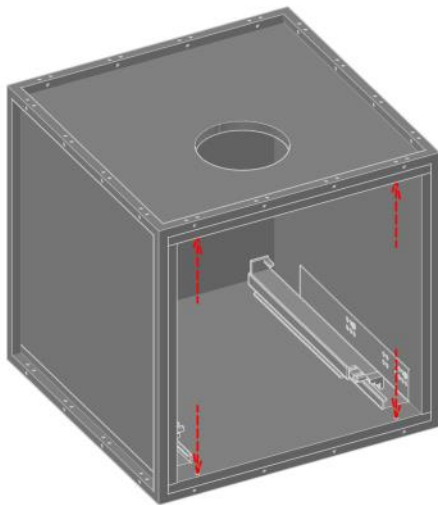

Screw 4 Standard GRID screws into the 4 mounting holes as illustrated.



The GRID screws must be flush with the surface.

Place the drawer onto the rails and pull until the drawer falls into place.

(May require several attempts.)

Push the locking pawls back in, see photo.


Adjust the height of the drawer, if necessary, using the 2 adjustment handles underneath the drawer.

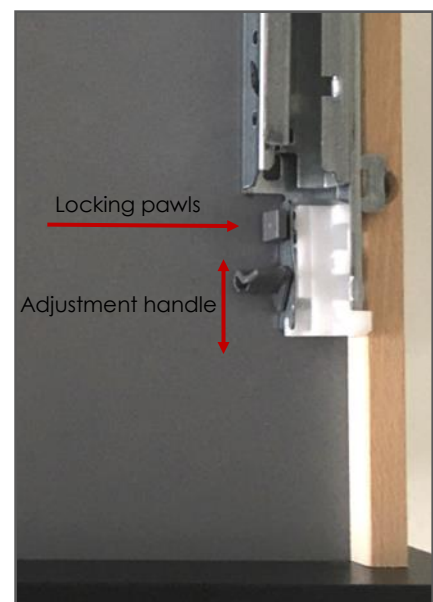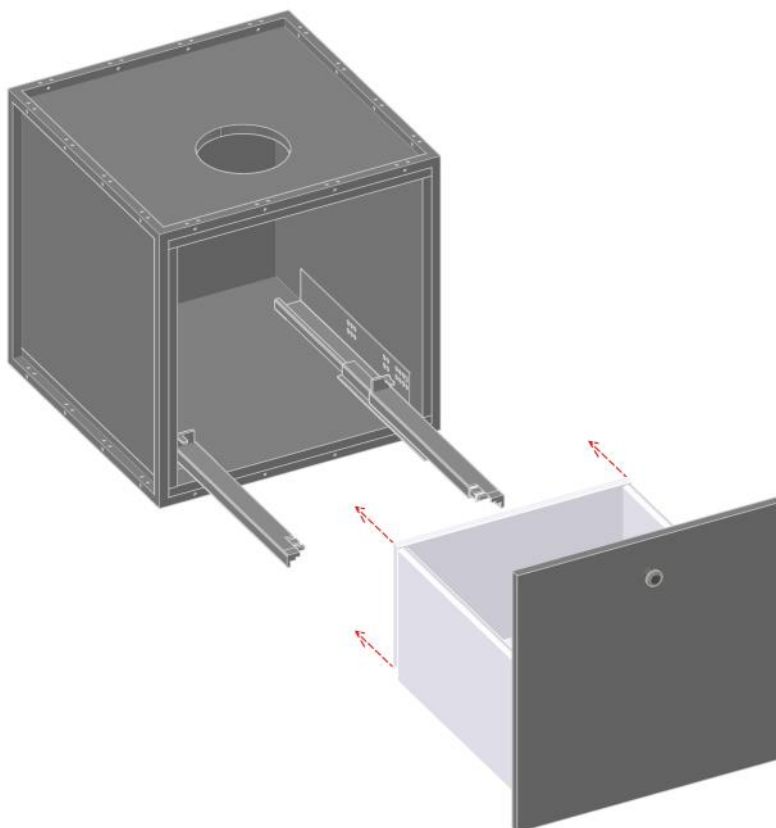

Please note that the handle is often attached to the inside of the drawer upon delivery.


Storage

Cupboard Insert

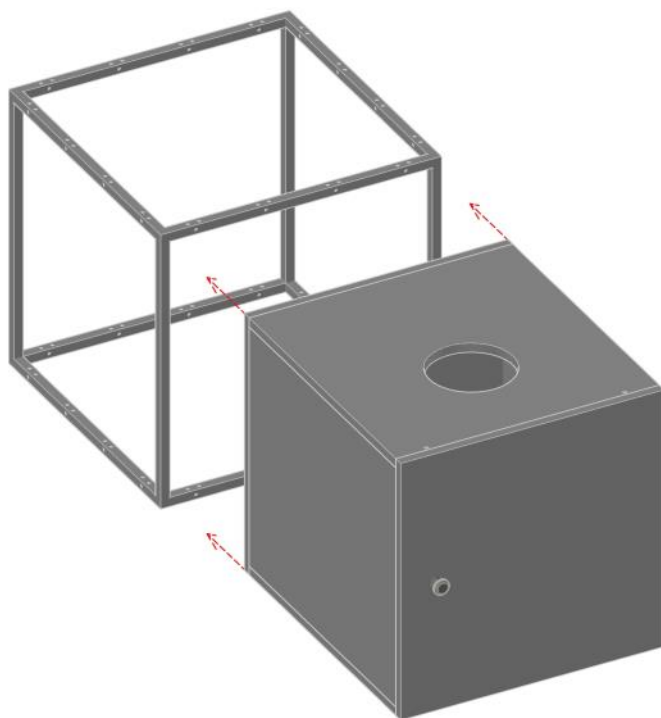

Push the Cupboard Insert into the GRID module.

Handling of the Cupboard Insert is easy when using the cutout on top as a handle.

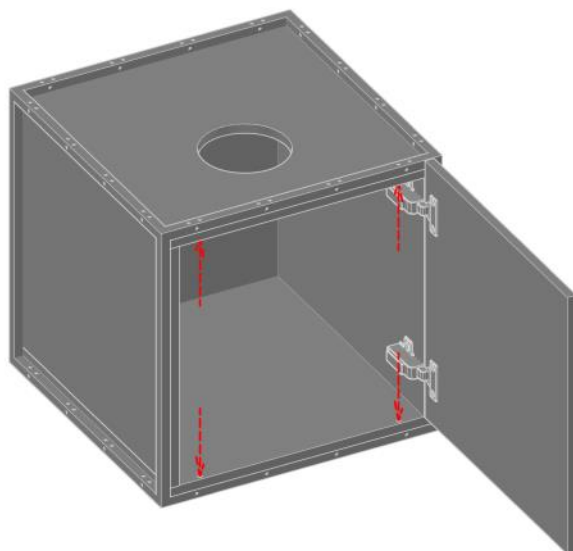


Screw 4 Standard GRID screws into the 4 mounting holes as illustrated.

The GRID screws must be flush with the surface.

Please note that the handle is often attached to the inside of the door upon delivery.


Storage

Cupboard Insert, high

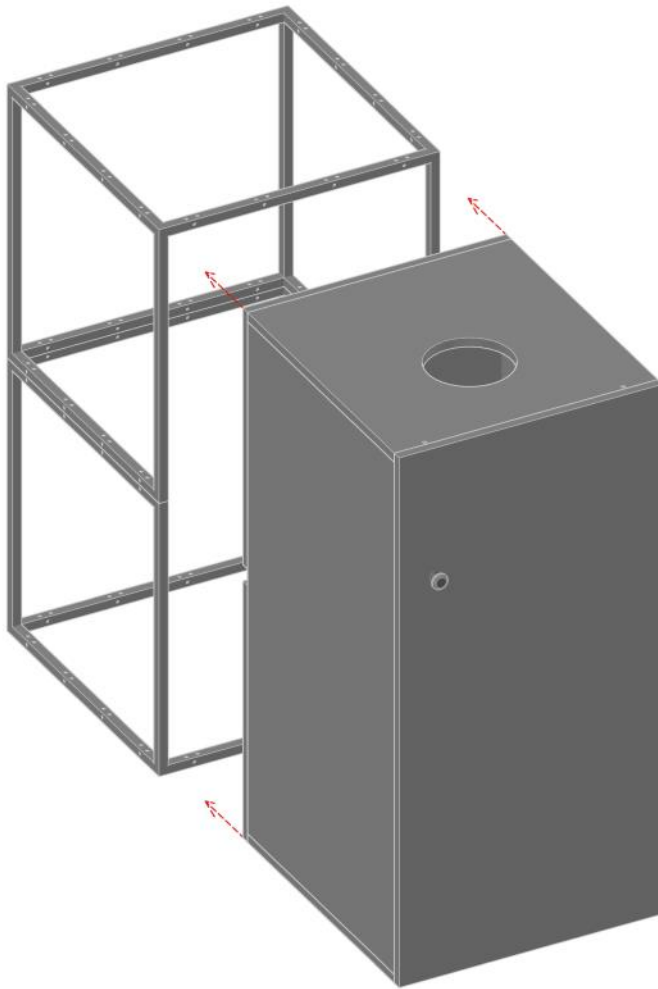

Push the Cupboard Insert into the GRID Module.

Handling of the Cupboard Insert is easy when using the cutout on top as a handle.

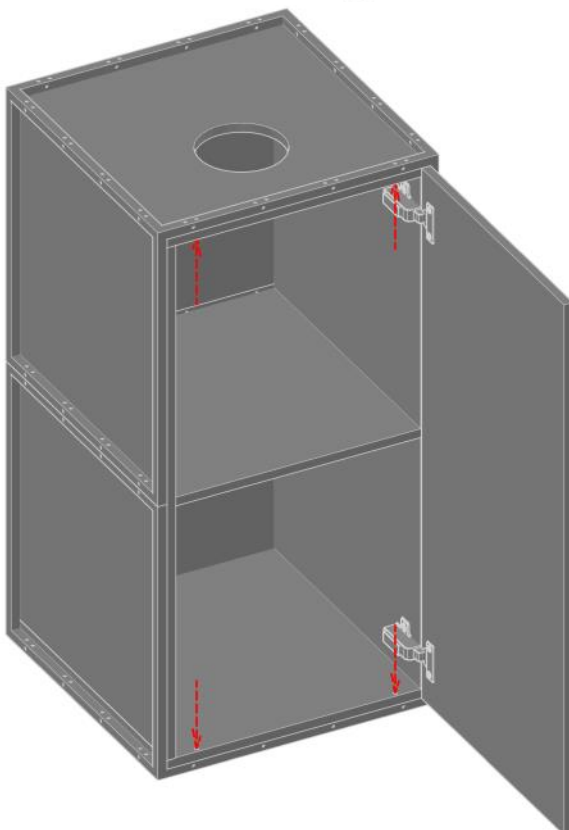


Screw 4 Standard GRID screws into the 4 mounting holes as illustrated.

The GRID screws must be flush with the surface.


Please note that the handle is often attached to the inside of the door upon delivery.

Storage


Shelf for Cupboard Insert

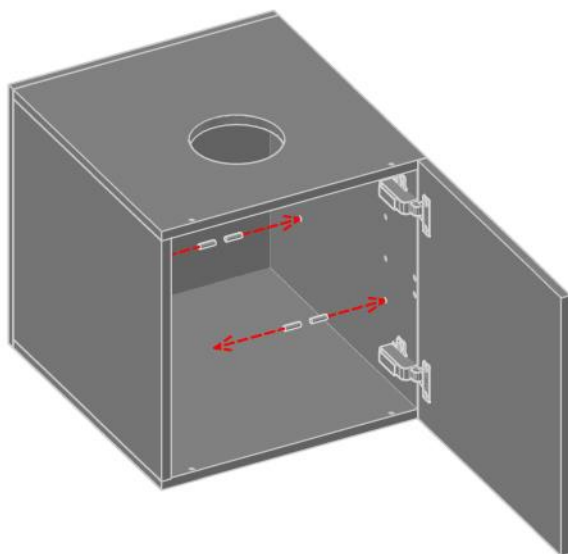

Position the 4 shelf pins at the desired height.

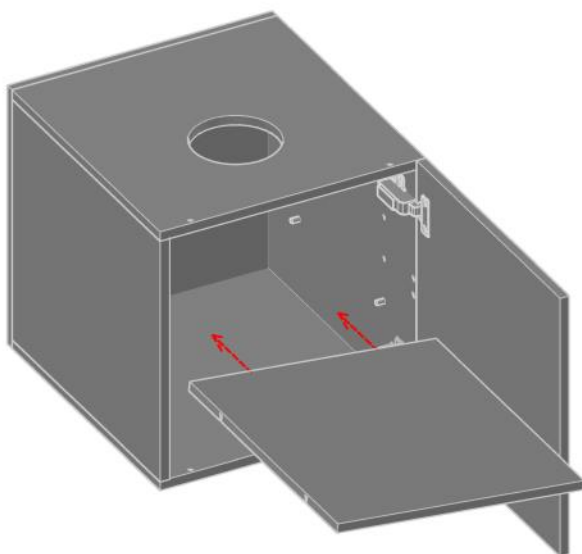


Turn the shelf slightly, push into the insert and lower until it rests on the shelf pins.

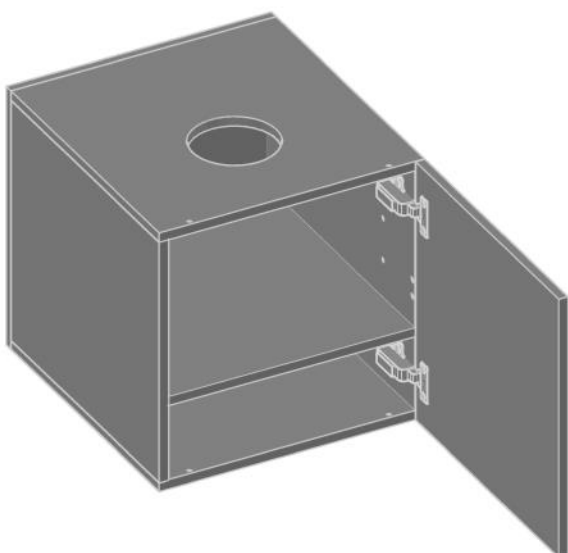


Storage

Hanging File Insert for drawer

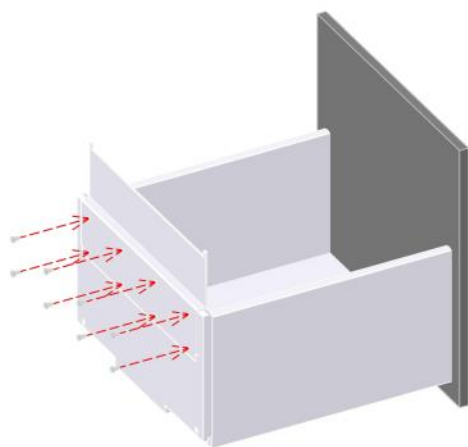

Place one bracket to rest on the rear edge of the drawer.

Fix the bracket with the screws supplied using all mounting holes as illustrated.

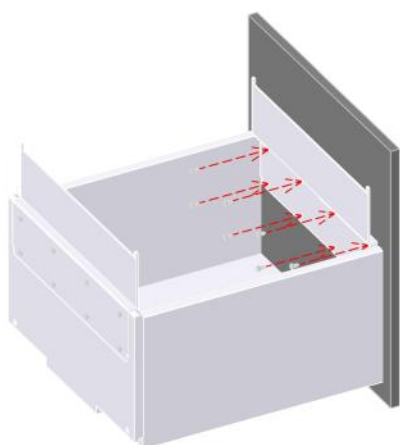


Place the other bracket on the front at the same height as the first bracket.


Fix the bracket with the screws supplied using all mounting holes as illustrated.

Storage

Door Kit

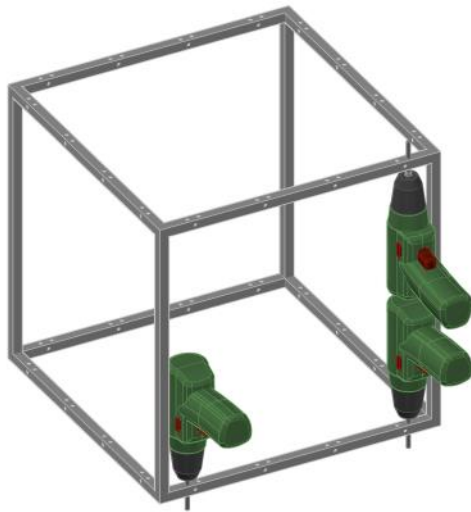

Use the drill bit supplied (4mm) to drill 3 holes as illustrated.

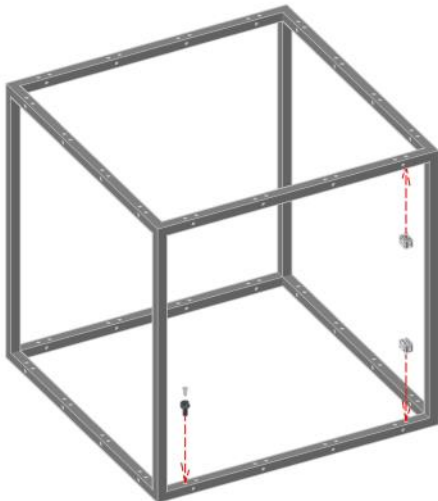


Carefully press the door stop into place.

Gently fasten the small screw.

Place the 2 hinges as illustrated.

Loosen the small screw on the hinges as much as possible.

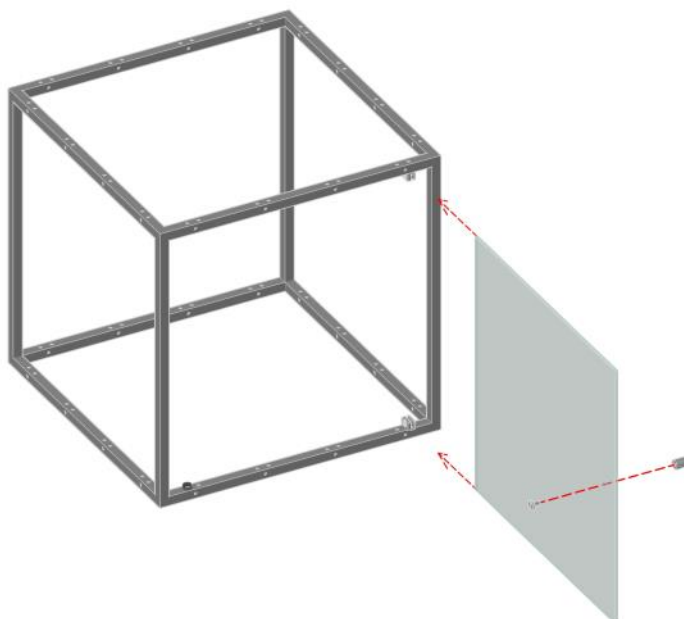

Carefully slide the door into the hinges.

Tighten the screws slightly so the door can still be adjusted.


Adjust the door and tighten carefully.

Carefully screw in the handle with the screw supplied.

Storage

Door Kit with lock

Mount the door by following the steps described on page 22.

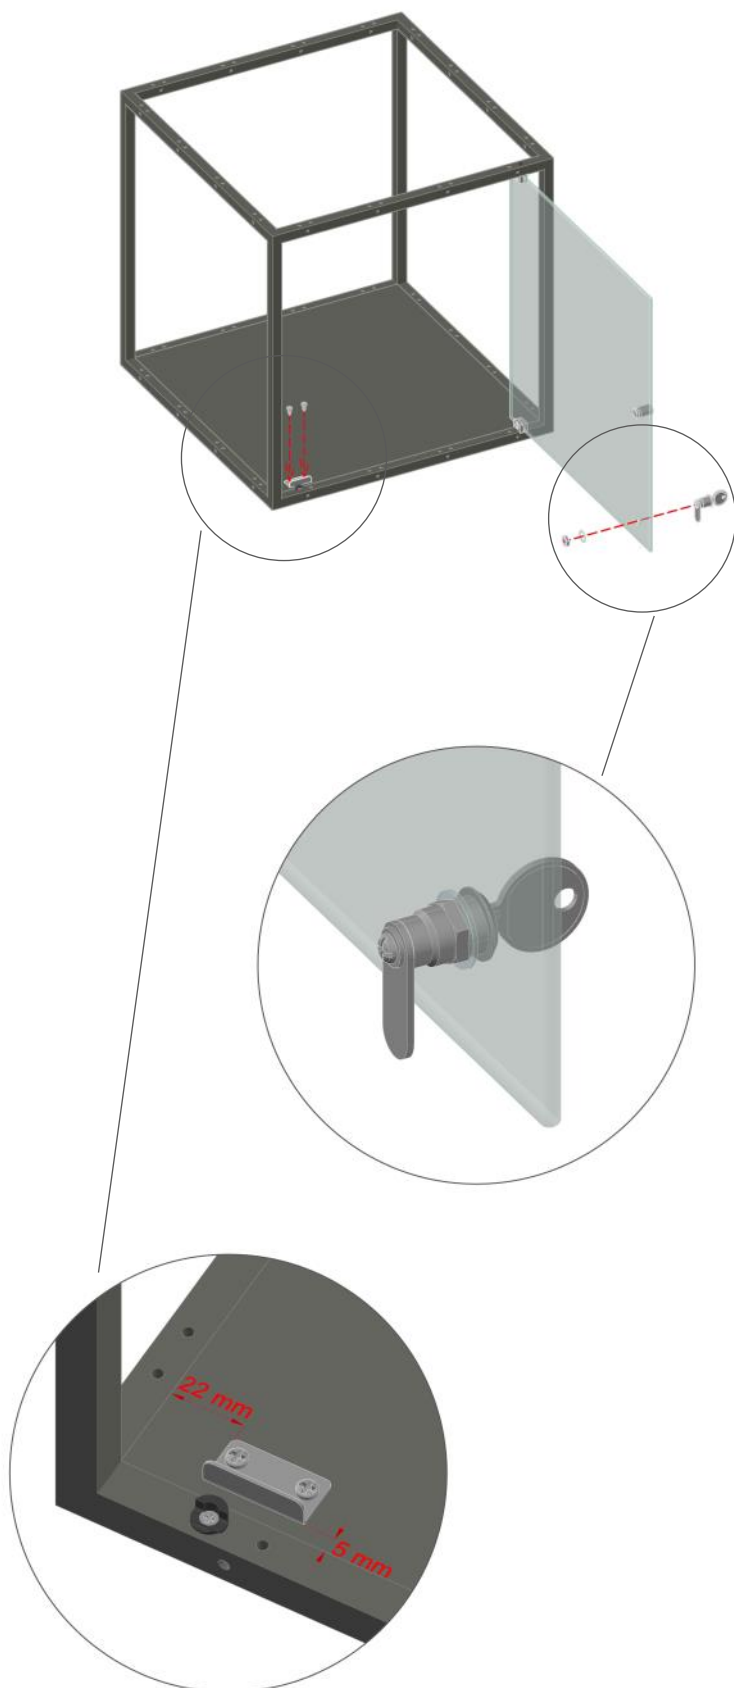


Position the lock by 'edging' it through the hole.

Fit the plastic washer first, then the nut.
Adjust the lock, then tighten the nut.

Position the striking plate as illustrated.
Screw in the 2 screws supplied.


Whiteboard/Cork/Felt Panel

Whiteboard Panel

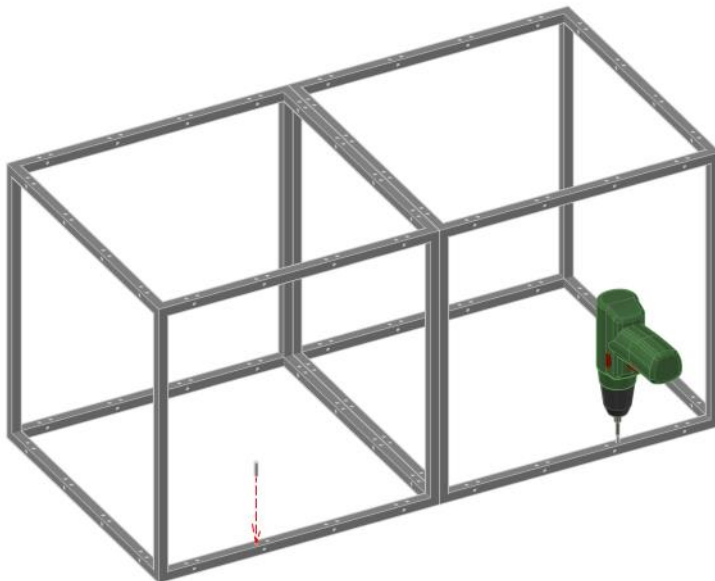


Screw 2 Standard GRID screws into the base frame as illustrated.

The GRID screws should be protruding approx. 10mm.

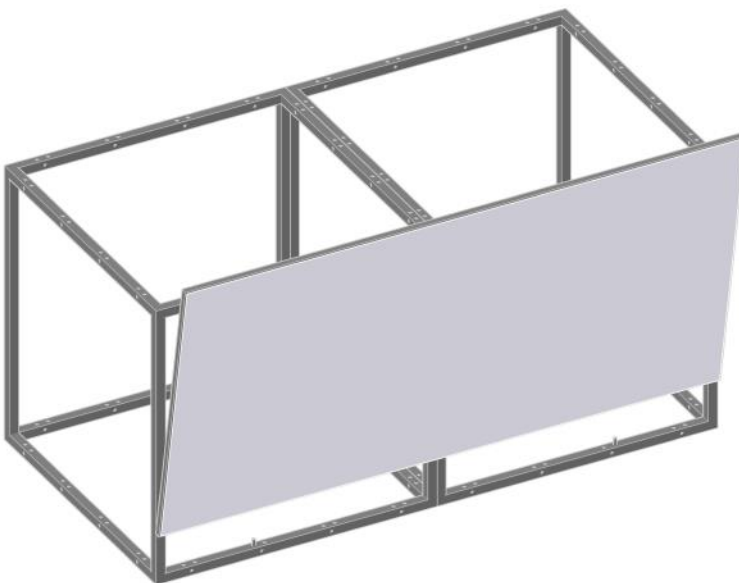

Push the Whiteboard Panel into place over the screws.

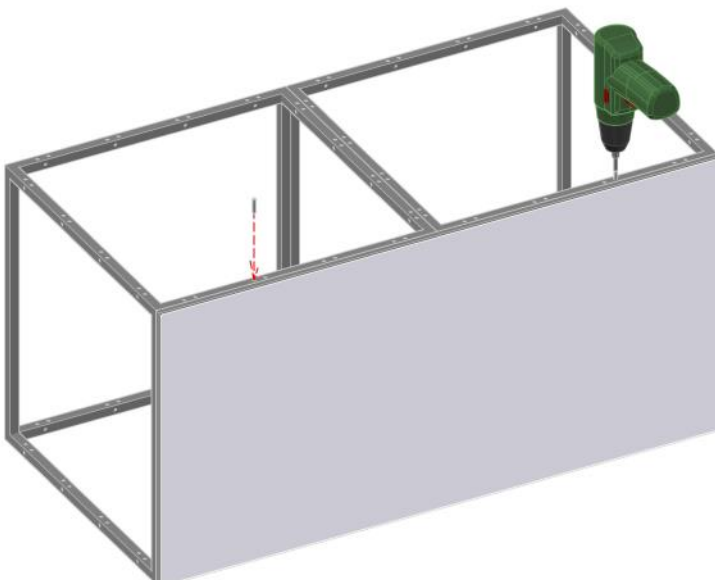


Screw 2 Standard GRID screws into the top frame as illustrated.

The GRID screws must be flush with the surface.

The same procedure applies to Felt Panel and Cork Panel.

Felt Side

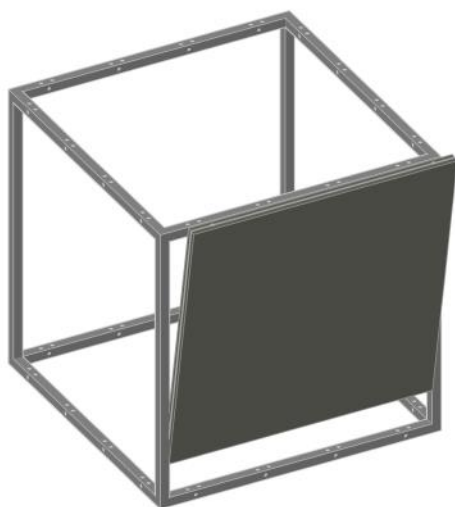

The Felt Side can only be used vertically and cannot operate as a shelf.


Turn the Felt Side until the small pins are facing up and down respectively.

Push the Felt Side into place so that the pins catch the mounting holes.

Start with the base frame and finish with the top frame of the module.

Box Side Panel

Box Side Panel


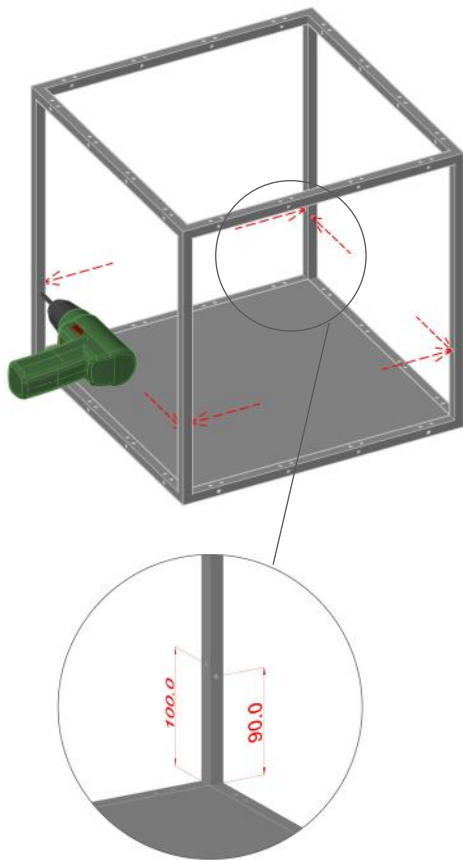


Drill 2 holes in each of the 4 vertical sides as illustrated.

Drill: 3,5 mm.

Depth: 8 mm.


Screw 8 Short GRID screws into the holes, they should be protruding approx. 5mm.

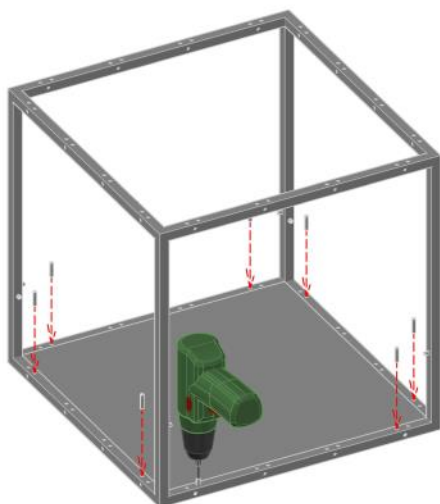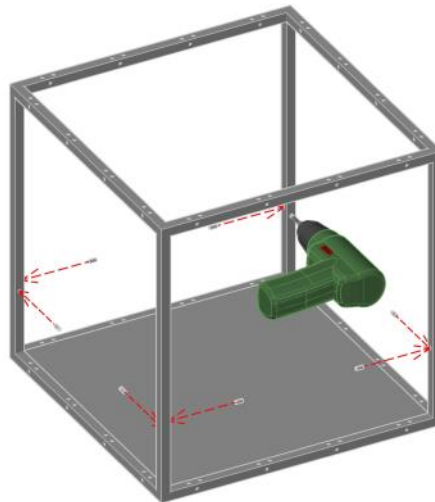

Screw 8 Standard GRID screws into the base frame as illustrated.


The GRID screws should be protruding approx. 10mm.

Mount the Box Side Panels by sliding them over the Short GRID screws and into place.

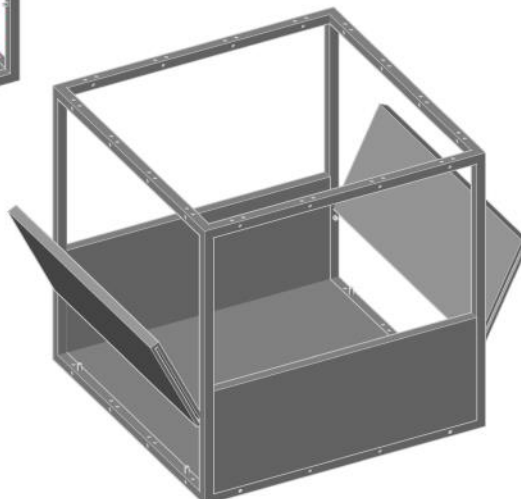


Top Box

Top Box

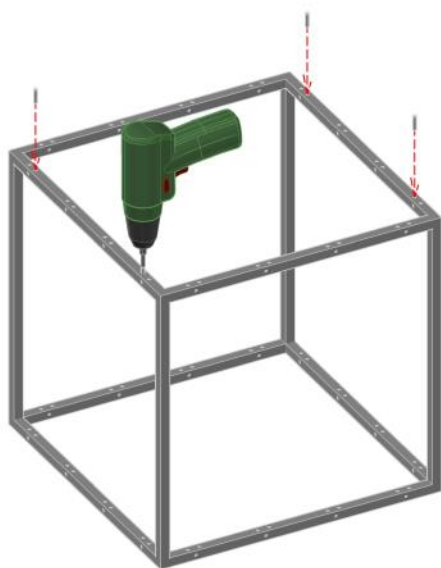

Screw 4 Standard GRID screws into the top frame as illustrated.


The GRID screws should be protruding approx. 10mm.

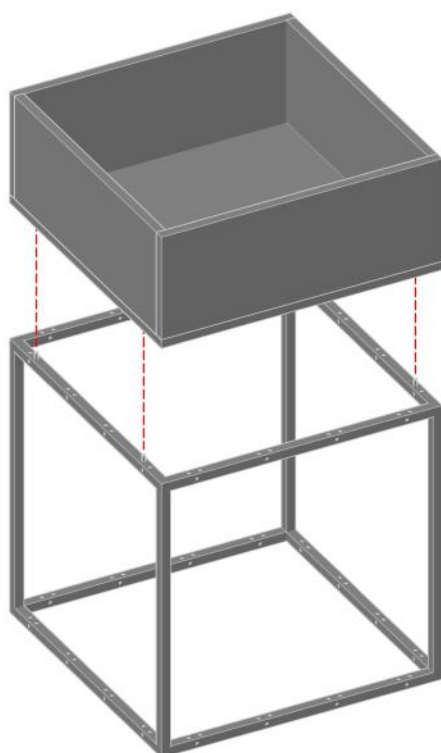


Press the Top Box over the screws into place.

Plant Box Insert

Plant Box Insert in module with Box Side Panels

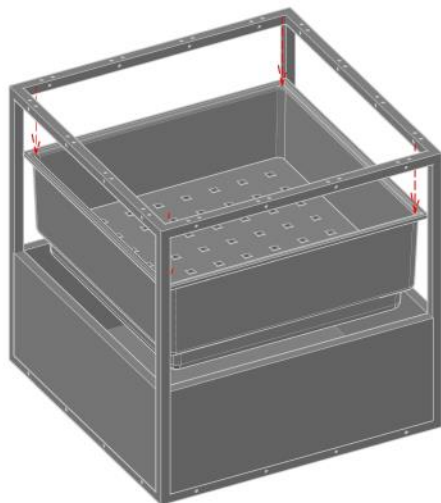


Plant Box Insert in Top Box

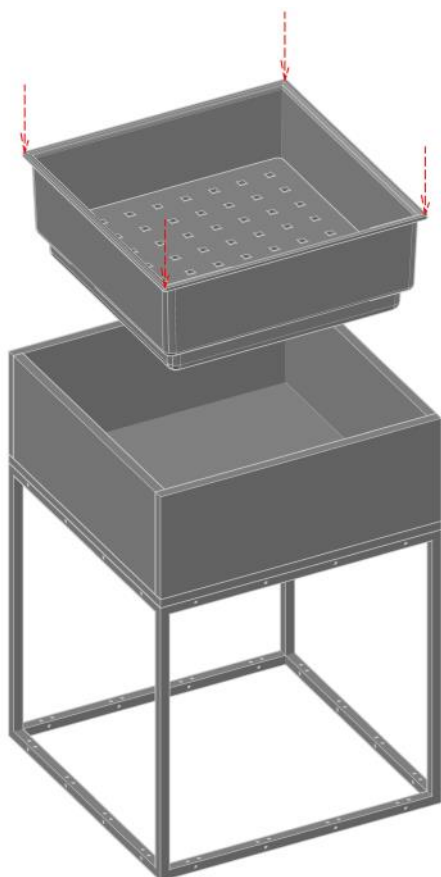


Double Side

Double Side

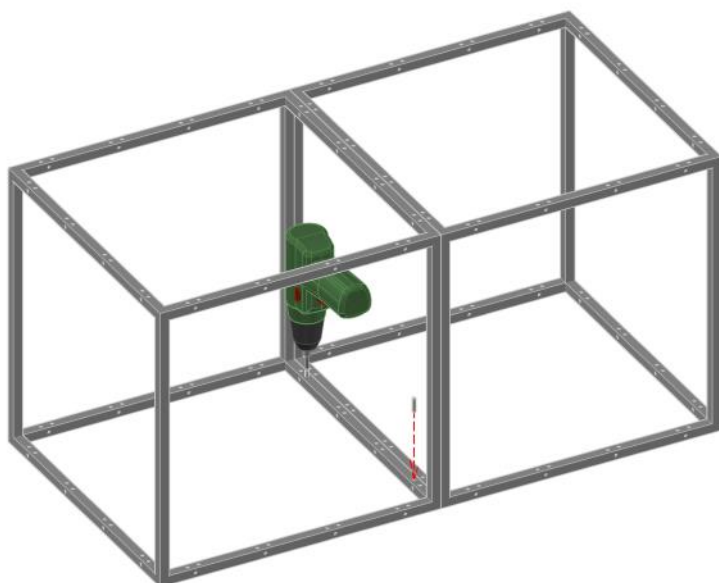


Screw 2 Standard GRID screws into the base frame as illustrated.

The GRID screws should be protruding approx. 10mm.

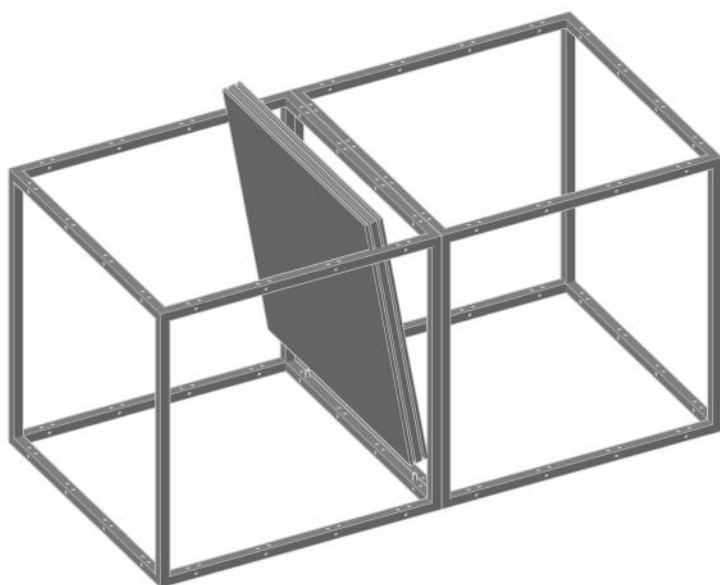

Slide the Double Side over the screws and push into place.

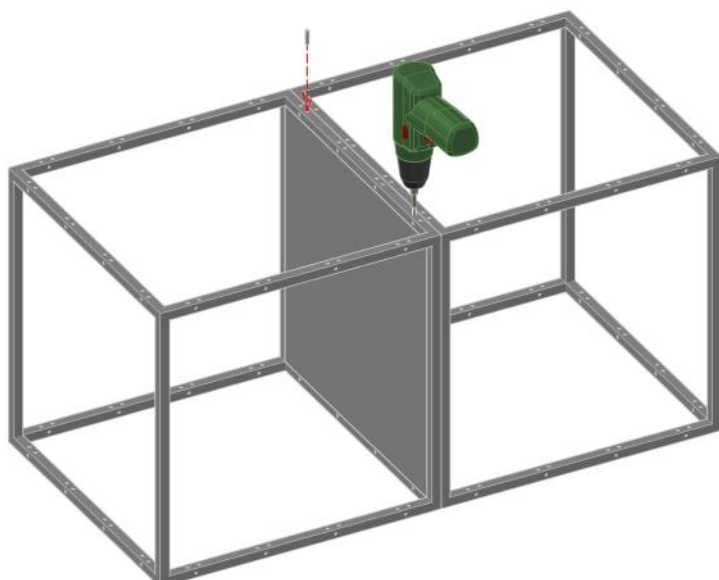


Screw 2 Standard GRID screws into the top frame as illustrated.


The GRID screws must be flush with the surface.

Magazine Shelf



Magazine Shelf, 1x1

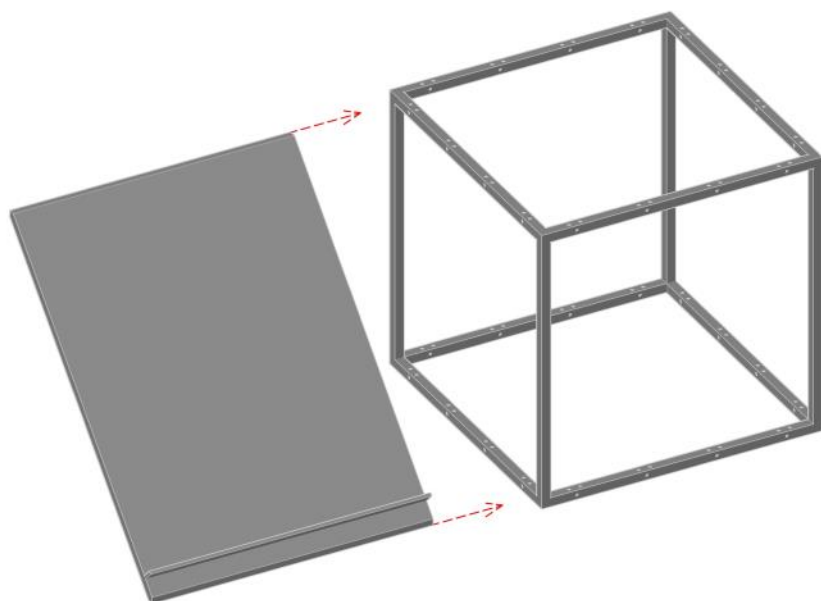

Slide in the Magazine Shelf from the side as illustrated.

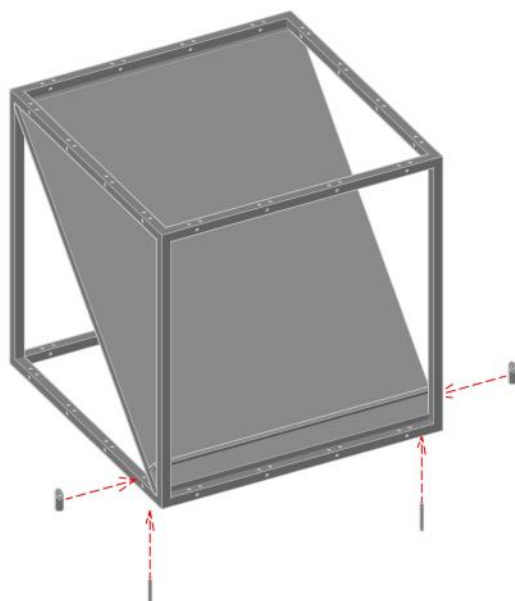


Screw 2 Standard GRID screws up into the frame from below through the bushing. The screws must catch the milling under the Magazine Shelf.

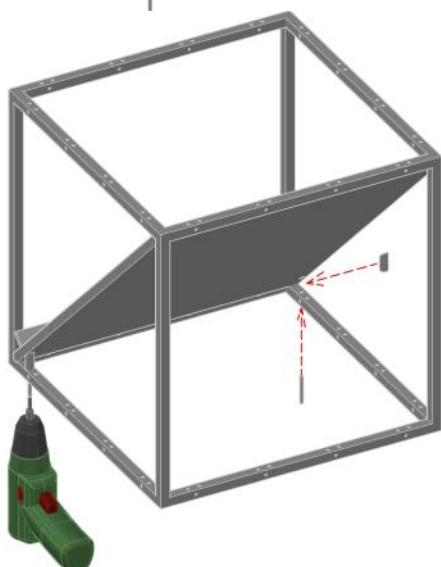


Magazine Shelf

Magazine Shelf, 1x2

Slide in the Magazine Shelf from the side as illustrated.

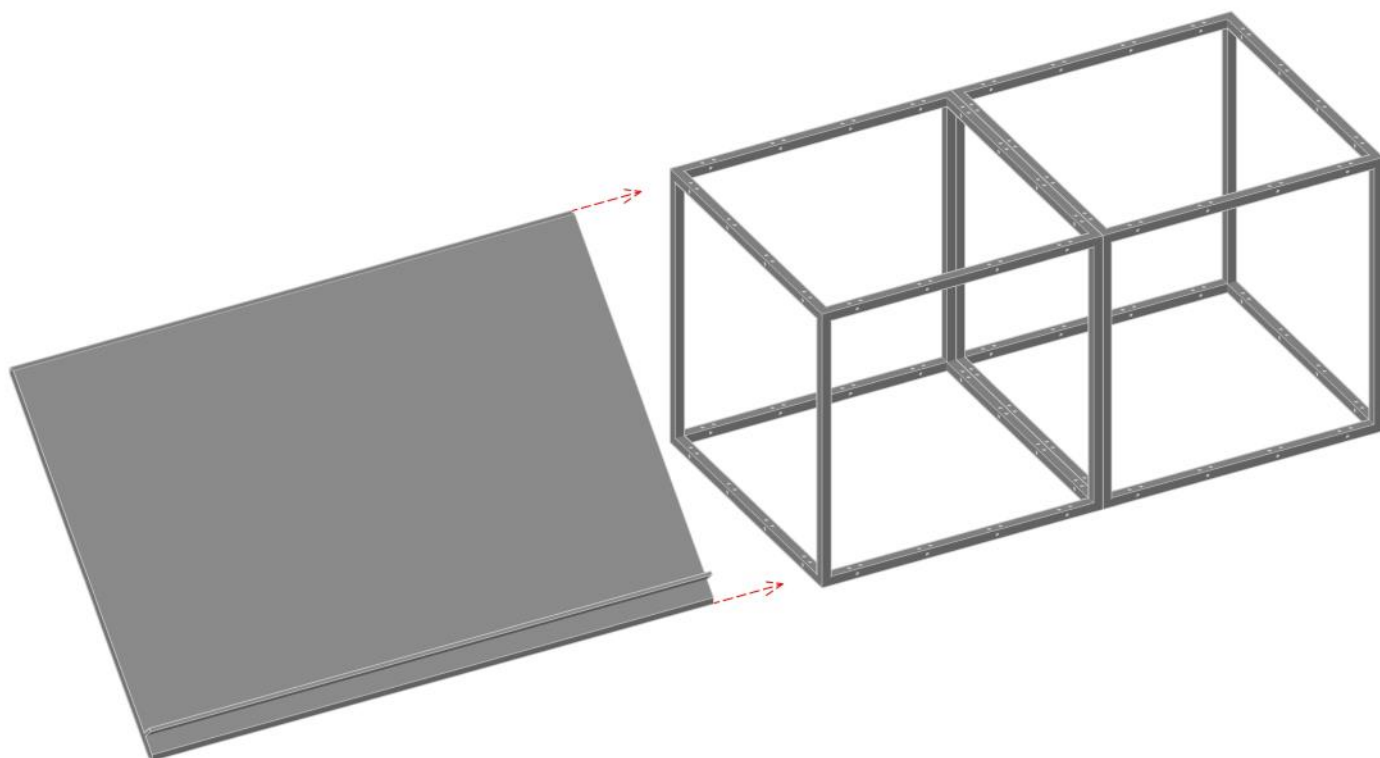

If necessary, the Magazine Shelf can be fixed in the same way as the Magazine Shelf, 1x1.

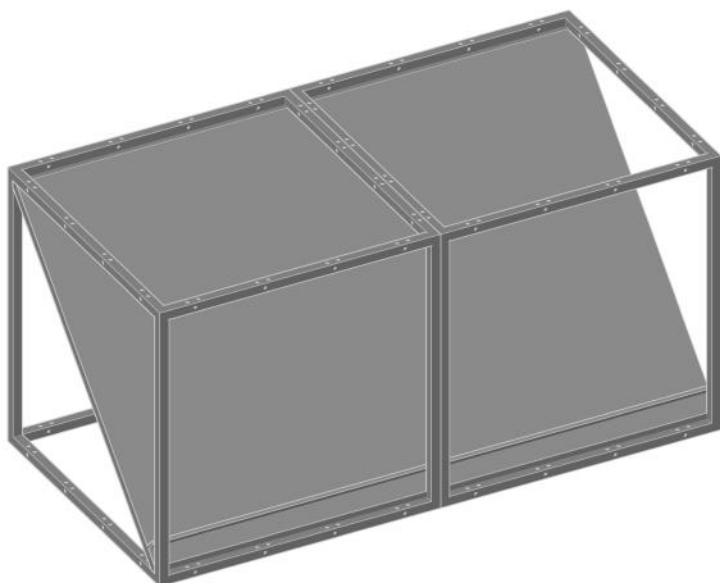

Divider Insert




Divider Insert, horizontal division

Mount one side as illustrated.

Screw 2 Standard GRID screws into the opposite base frame as illustrated.

The GRID screws should be protruding approx. 10mm.


Place 2 shelf pins in the side and 2 in the shelf as illustrated.

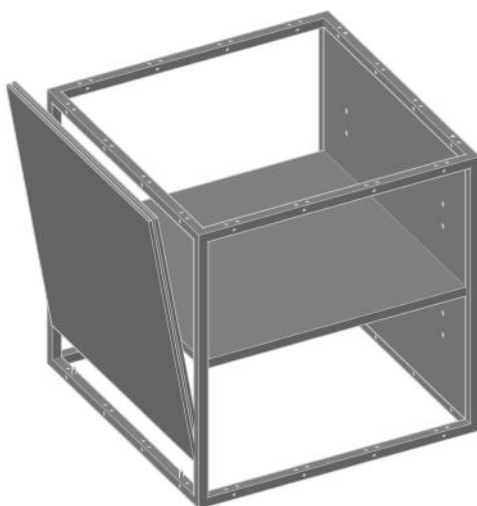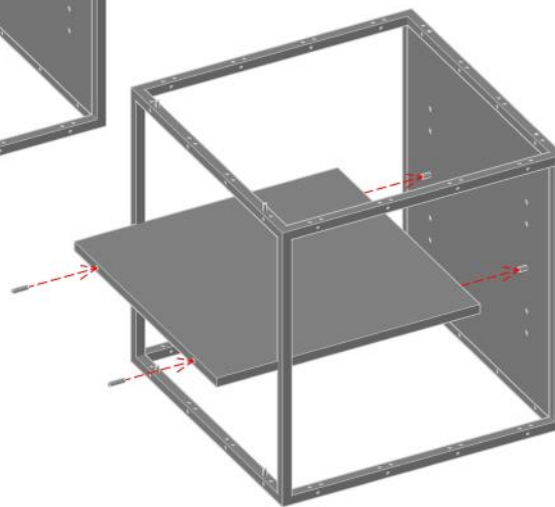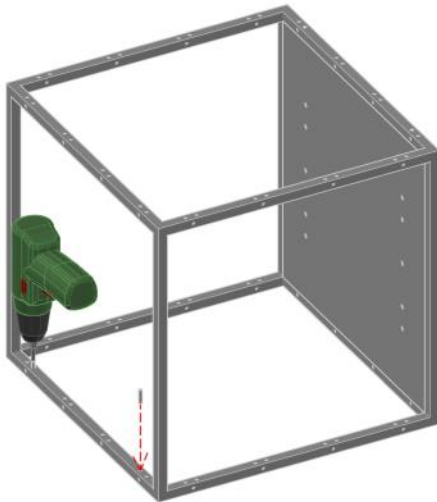

Hold the shelf and slide the side over the screws into place.


Screw 2 Standard GRID screws into the top frame as illustrated.

GRID Screws must be flush with the surface.

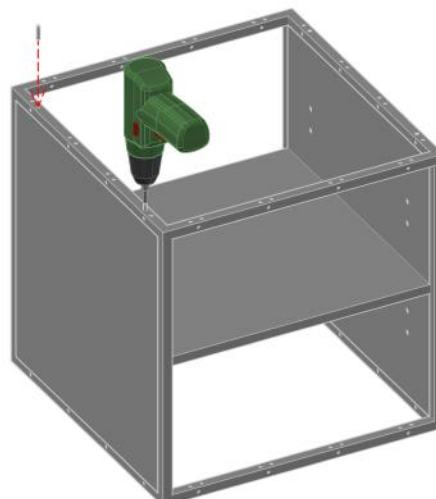

Divider Insert

Divider Insert, vertical division


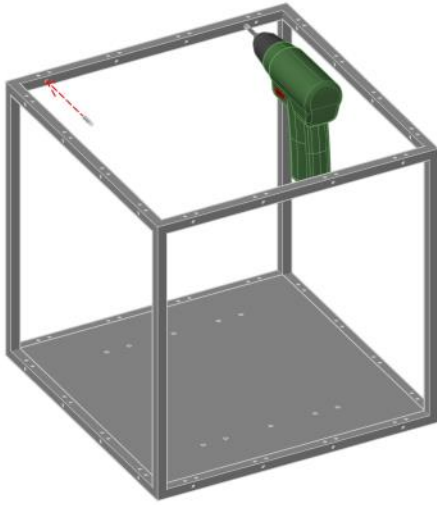


Mount the base shelf as illustrated.

Screw 2 Standard GRID screws into the top frame as illustrated.

The GRID screws should be protruding approx. 10mm.


Position 2 shelf pins in the base shelf and 2 in the side as illustrated.

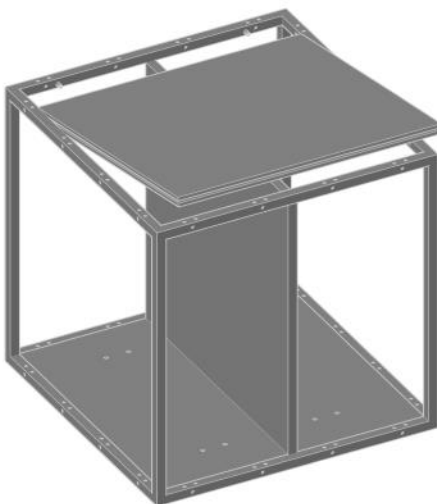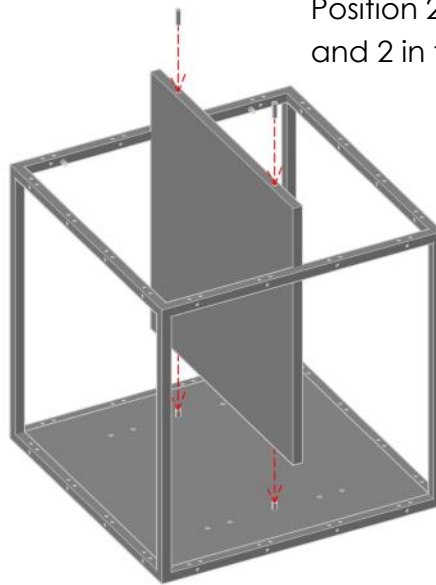

Hold the side and slide the top shelf over the screws into place.


Screw 2 Standard GRID screws into the top frame as illustrated.

The GRID screws must be flush with the surface.

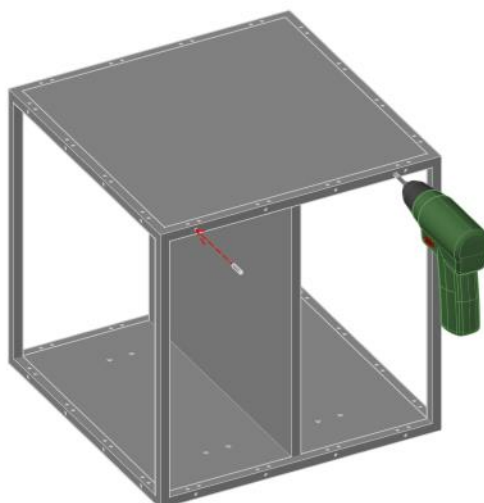

Seat and Hanger Kit

Seat, 1x1

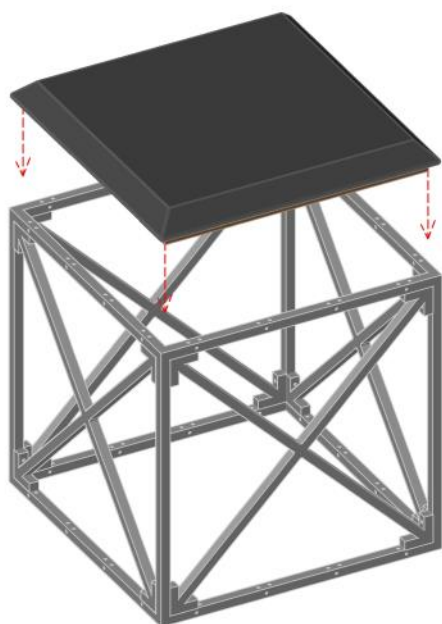


Place the seat on top of the module.


Screw 4 Standard GRID screws into the top frame as illustrated.

The GRID screws must be flush with the surface.

Seats must always be supported by sides or Cross Braces.

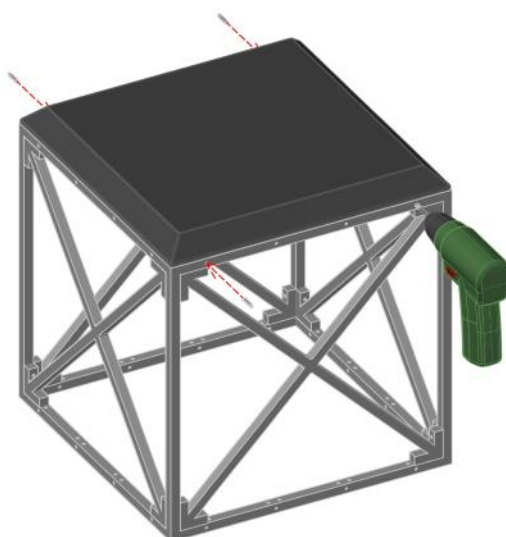

Hanger Kit

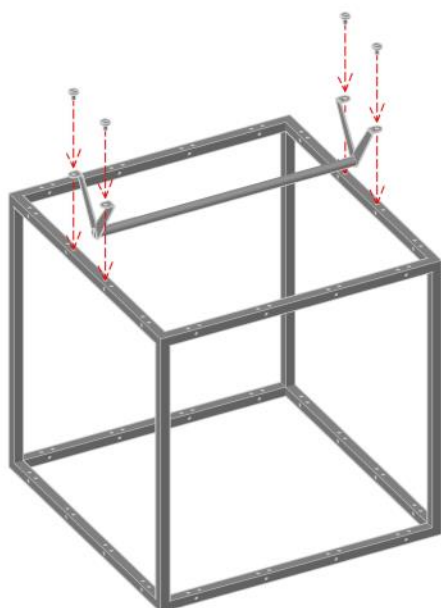

Screw the 4 supplied screws into the frame as illustrated.


The Hanger Kit can be mounted both on top of the frame or below.

Hanger


Hanger, 1x1

Mount 1 bushing on each Shelf/Side in the desired height.

Mount one Shelf/Side.

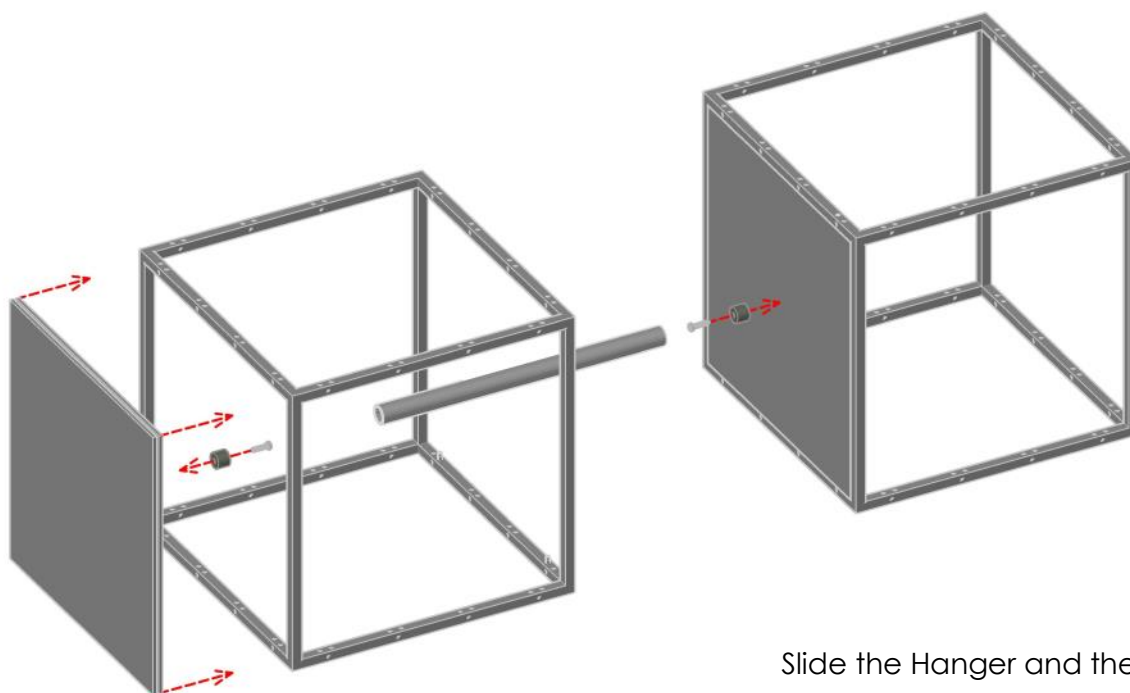


Slide the Hanger and the other Shelf/Side into place and mount the Shelf/Side.

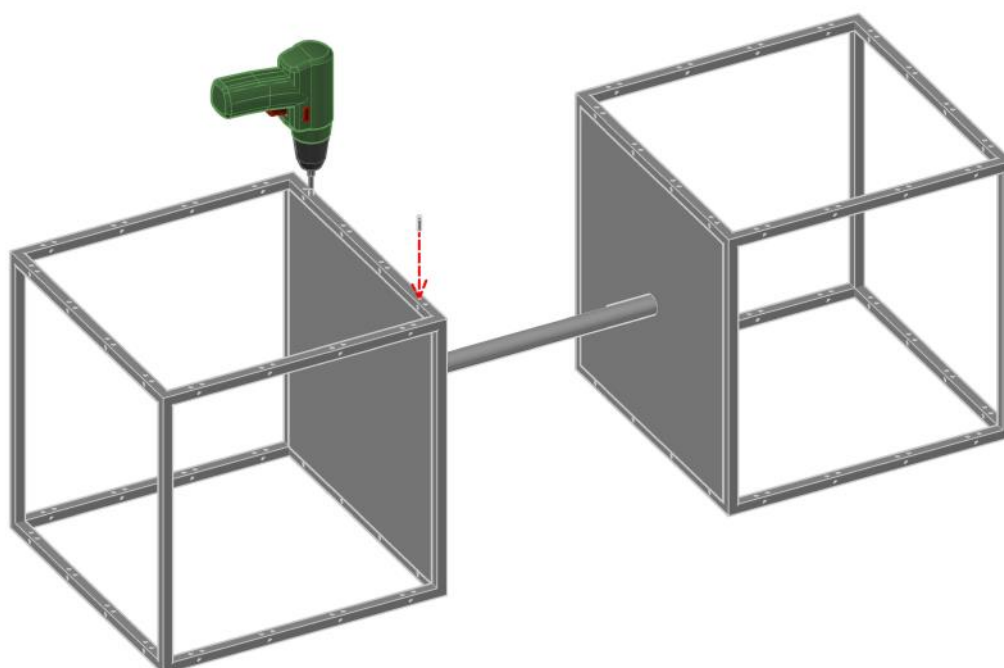

How to assemble a configuration


Configuration

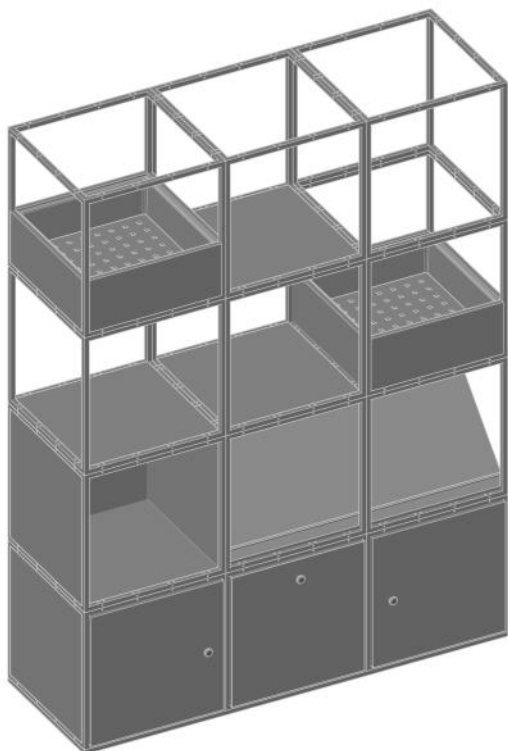

The configuration consists of:

12 x	GRID Basic Module
13 x	Shelf/Side
1 x	Base Panel, 1x3
1 x	Drawer Insert
2 x	Cupboard Insert
8 x	Box Side Panel
2 x	Plant Box Insert
1 x	Magazine Shelf, 1x2

Step 1

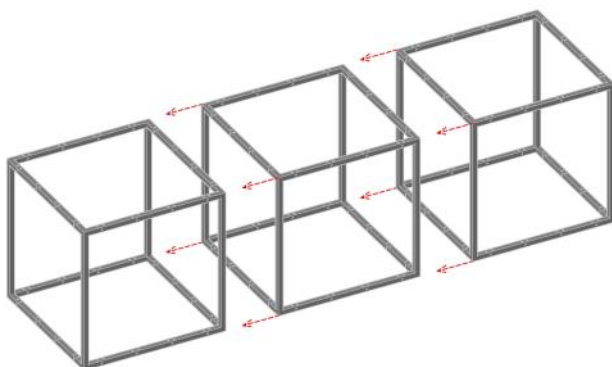


Screw 3 GRID modules together side by side, using 4 Standard GRID screws in each joint.

See page 4.

Repeat for all rows.

Step 2

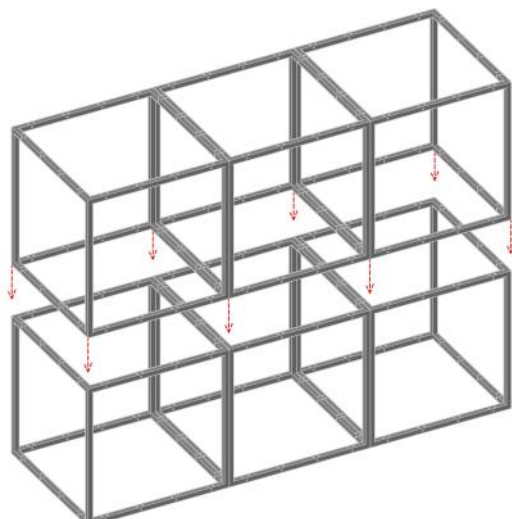


Screw 2 rows together as illustrated, using 4 Standard GRID screws in each joint.

See page 4.

Repeat for all rows.

How to assemble a configuration


Step 3

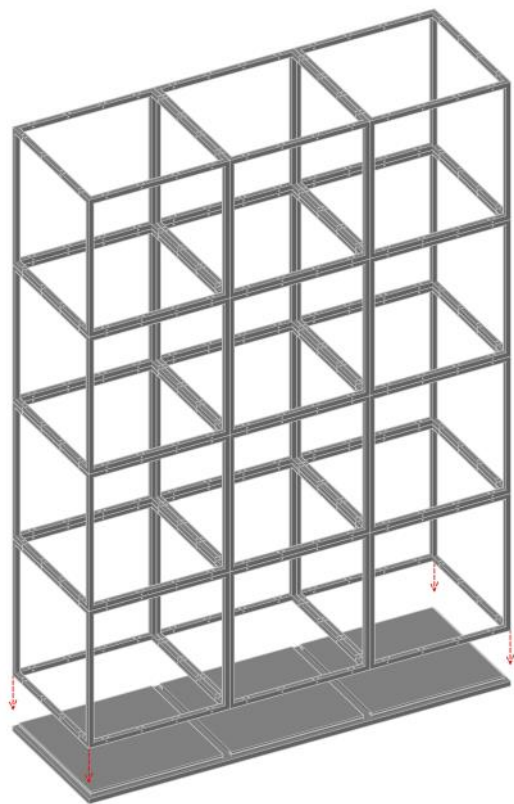

Mount the assembled modules on the Base Panel.

See page 12.

Step 4

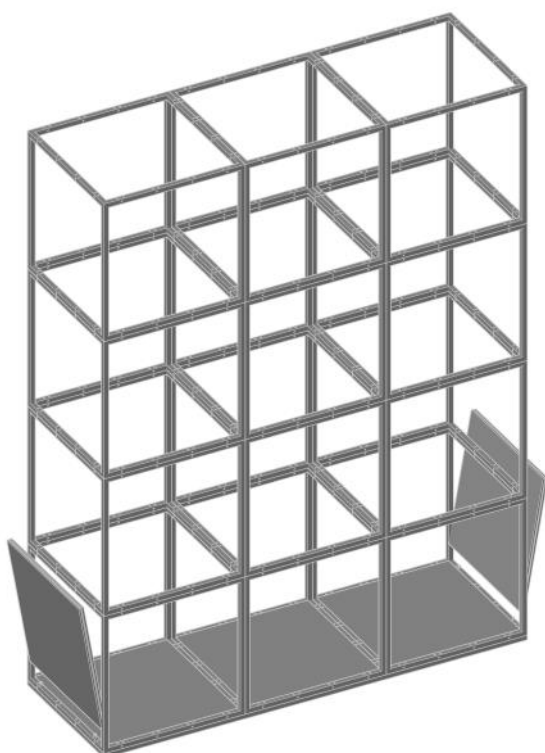


Mount 2 Shelf/Sides as sides.

See page 7.

How to assemble a configuration


Step 5

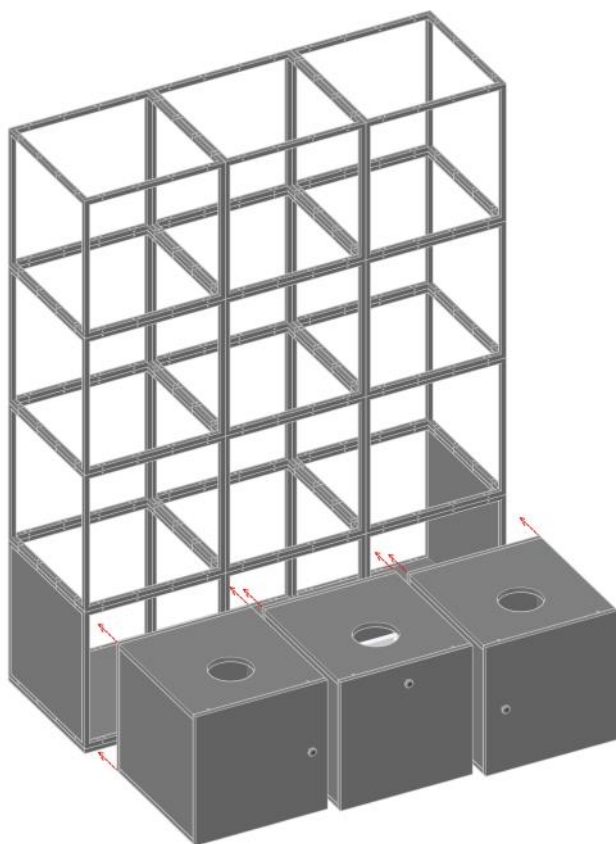

Mount the Drawer Insert and the 2 Cupboard Inserts.

See page 16,17 and 18.

Step 6

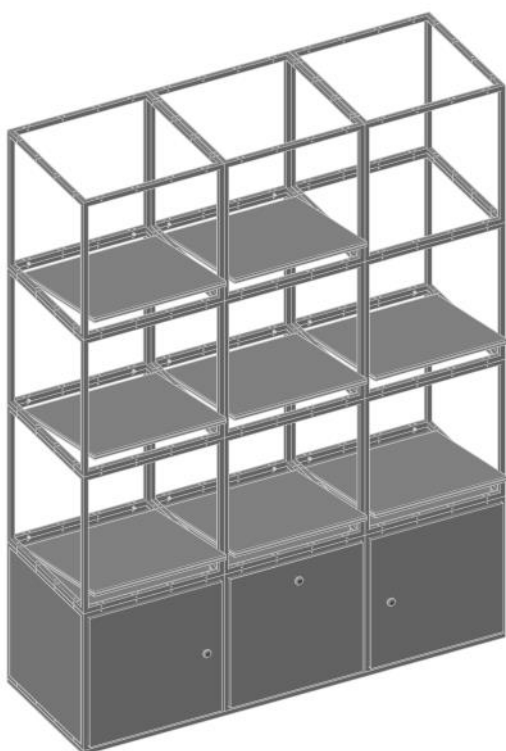


Mount 8 Shelf/Sides as shelves.

See page 6.

How to assemble a configuration

Step 7

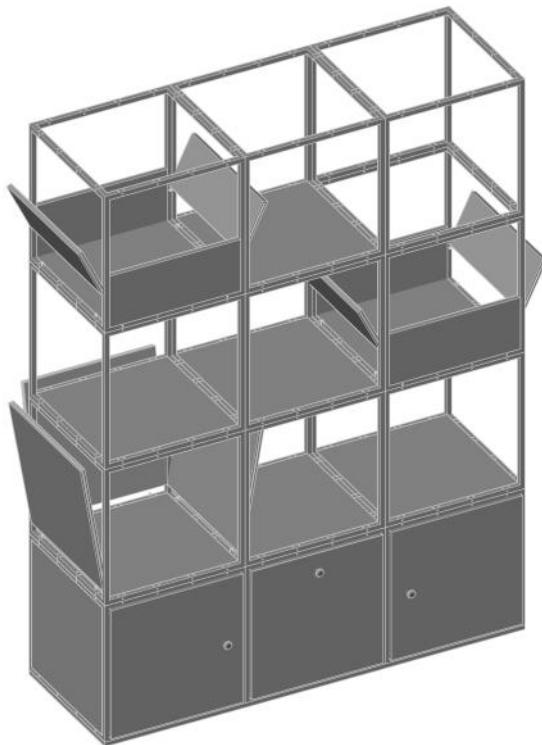


Mount 3 Shelf/Sides as sides.

See page 7.

Mount 8 Box Side Panels as illustrated.

See page 26.

Step 8

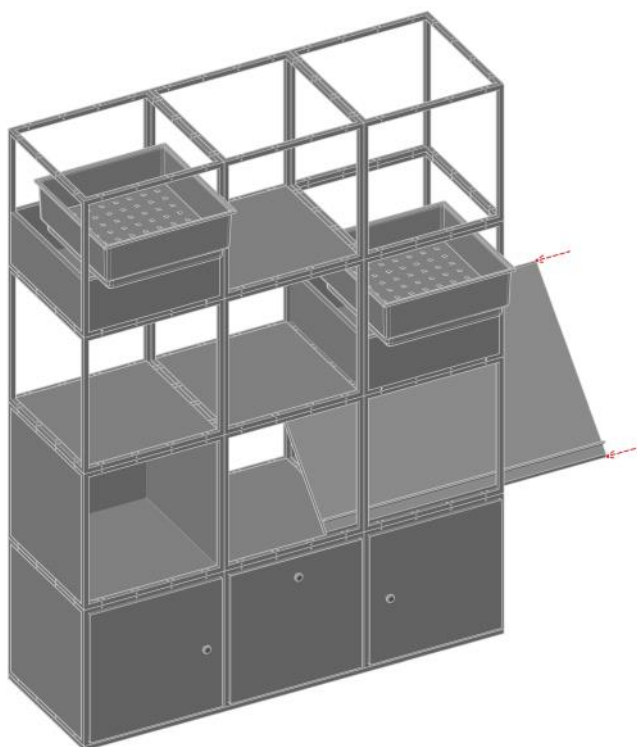

Slide the Magazine Shelf into place.

See page 31.

Lower the 2 Plant Box Inserts into place.

See page 28.

GRID System ApS

Smedevangen 2
DK-3540 Lynge
Denmark

+45 7262 6575
grid@gridsystem.dk

www.gridsystem.dk
www.instagram.com/gridsystem.dk
www.facebook.com/gridsystem
www.pinterest.com/gridsystemdk
www.linkedin.com/company/gridsystem