



Низковольтные термопечатающие механизмы FTP-628 MCL701/751 Технические характеристики

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	

Единый адрес для всех регионов: fst@nt-rt.ru || www.fujitsu.nt-rt.ru

BATTERY DRIVE, FTP-608 Series

2" HIGH SPEED THERMAL PRINTER

FTP-628 MCL701/751#01

Vertical Easy Loading Method


■ OVERVIEW

The easy loading FTP-608 MCL Series is ultra compact high speed, battery driven thermal printer, printing on 2-inch wide paper (58mm) where platens are removable. Our original platen removal mechanism improved paper loading and maintenance.

The FTP-608 MCL series can be used for a variety of applications, such as portable terminals, POS, ticket issuing terminals, label printers, banking terminals, and measurement and medical equipment.

■ HIGHLIGHTS

- **Easy loading type**
Our original platen removal mechanism improved paper loading and maintenance.
- **Ultra compact**
701: Height 31.5 mm, width 67.5 mm, depth 20.5 mm
751#01: Height 32.5 mm, width 67.5 mm, depth 19.8 mm
- **High speed printing**
It can print at 80 mm/s (640 dotlines/s) maximum by using Fujitsu's unique head drive control.
- **High resolution printing**
8 dots/mm of resolution printing is possible.
- **RoHS compliant**

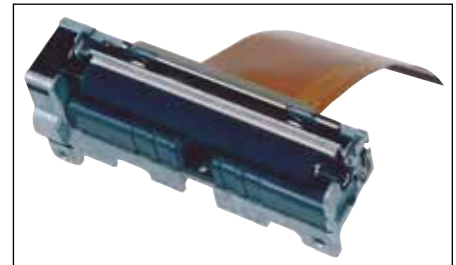

FTP-628MCL701



FTP-628MCL751#01

FTP-628MCL701/751#01

■ PART NUMBERS

Item		Part Number
Printer mechanism		FTP-628MCL701 (without platen open detect switch) no I/F board
		FTP-628MCL751#01 (Serial and USB Interface board available)
LSI for driving		FTP-628CU601R
Interface board	USB	FTP-628DSL642R
	Serial	FTP-628DSL643R
Interface cables	USB	FTP-629Y301
	Serial	FTP-628Y302
Power cables	Logic, head, motor	FTP-628Y402

■ SPECIFICATIONS

Item		Specifications
Part number		FTP-628MCL701/751#01
Printing method		Thermal line dot method
Dot structure		384 dots/line
Dot pitch (horizontal)		0.125mm (8dots/mm) - Dot density
Dot pitch (vertical)		0.125mm (8dots/mm) - Line feed pitch
Effective printing area		48 mm
Number of columns		ANK 32 columns/line (maximum 12 x 24 dot font)
Paper width		58 mm +0/-1
Paper thickness		60 to 100µm (some paper may not be used because of characteristics)
Printing speed		Maximum 80mm/sec. (640 dot lines/sec.) 8.5V
Interface		FTP-628DSL600 series
Character types	Alphanumeric, katakana:	159 types
	International and special characters:	195 types
	OCRI	103 types
	OCRIII	23 types
	OCRIV	103 types
	Extended numeric	11 types
	JIS Kanji level 1, level 2, non-Kanji (supported only when Kanji CG is mounted)	about 6,800 types
Character, dimensions (WxH), number of columns	Half size	12 x 24 dots, (1.5 x 3.0 mm), 32 columns: ANK
	Full size	24 x 24 dots, (3.0 x 3.0 mm), 16 columns: ANK, Kanji
	Half size	8 x 16 dots, (1.0 x 1.0 mm), 48 columns: ANK
	Full size	16 x 16 dots, (2.0 x 2.0 mm), 24 columns: ANK, Kanji
	OCR I	24 x 40 dots, 16 columns
	OCR III	24 x 48 dots, 16 columns
	OCRIV	36 x 60 dots, 10 columns
Extended numeric	24 x 48 dots, 16 columns	

FTP-628MCL701/751#01

■ SPECIFICATIONS

Item		Specification	
		FTP-628MCL701/751#01	
Item		Conforms to RS232C/USB	
Operating Voltage	For print head		4.2 VDC to 8.5 V, average current 0.87A (0.98), peak value Printing ratio: 12.5%, printing speed 500mm/sec. at 7.2V
	For motor		4.2 VDC to 8.5 V, 1 A maximum
	For logic		3.0 to 5.25 VDC, 0.1 A maximum
Dimensions	Printer	701	67.5 x 20 x 31.5 mm (WxDxH)
	mechanism	751	67.5 x 19.8 x 32.5 mm (WxDxH)
	Interface board		70 x 52 x 20 mm (WxDxH)
Weight	Printer	701	Approximately 40g
	mechanism	751	Approximately 46g
	Interface board		Approximately 22g
Head life			Pulse resistance: 100 million pulses/dot (under our standard conditions). Abrasion resistance: paper traveling distance 50km (print ratio: 25% or less)
Operating environment	Operating temperature*		0°C to +50°C
	Operating humidity		20 to 85% RH (no condensation)
	Storage temperature		-20°C to +60°C (paper not included)
	Storage humidity		5 to 95% RH (no condensation)
Detection function	Head temperature detection		Detected by thermistor
	Paper out/mark detection		Detected by photo-interruptor
Recommended thermal sensitive paper		High sensitive paper	TF50KS-E2 (Nippon paper)
		Standard paper	TF50KS-E2 (Nippon paper) PD150R (Oji paper) FTP-020P0701 (58mm)
		Medium life storage paper	TF60KS-F2 (Nippon paper) FTP-020P0102 (58mm) PD170R (Oji paper) AFP220VBB-1 (Mitsubishi paper)
		Long life storage paper	PD160R (Oji paper) AFP-235 (Mitsubishi paper) TP50KJ-R (Nippon paper) HA112AA (Nippon paper)

*+5°C to +40°C printing density assurance range (-25 to 70°C capability)


FTP-628MCL701/751#01

FUNCTION

Item	Item
1. Test print function	8. Mark detection function
2. Paper out detection	9. MCU operation abnormality detection
3. Paper near end detection	10. Power ON/OFF sequence protection
4. Thermal head temperature abnormality detection	11. Motor over-current protection
5. Blow-out fuse detection	12. Hardware timer
6. Head voltage abnormality detection	
7. Motor power saving function	

DIMENSIONS


FTP-628MCL701

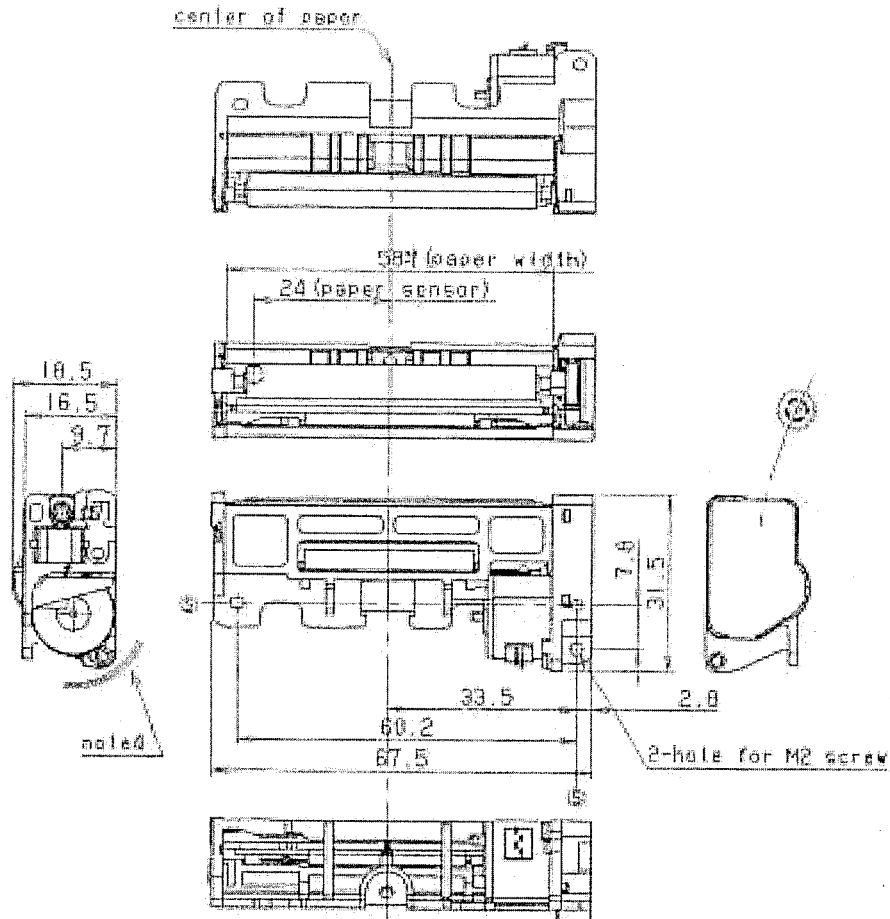

FTP-628MCL701/751#01


■ DIMENSIONS

FTP-628MCL751#01

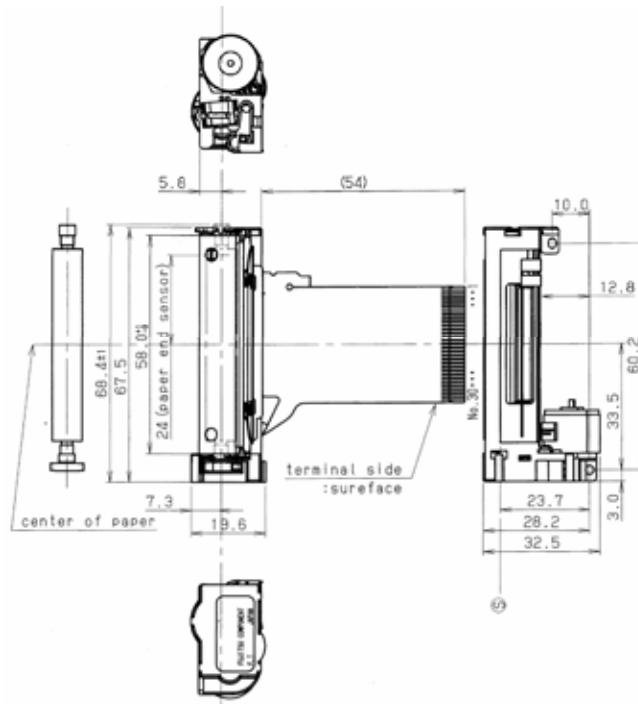

Notes:

1. The dimensions tolerance is $\pm 0.5\text{mm}$ unless specified.
2. Dimensions in parenthesis are reference dimensions.
3. $\text{\textcircled{S}}$ shows the platen center line.

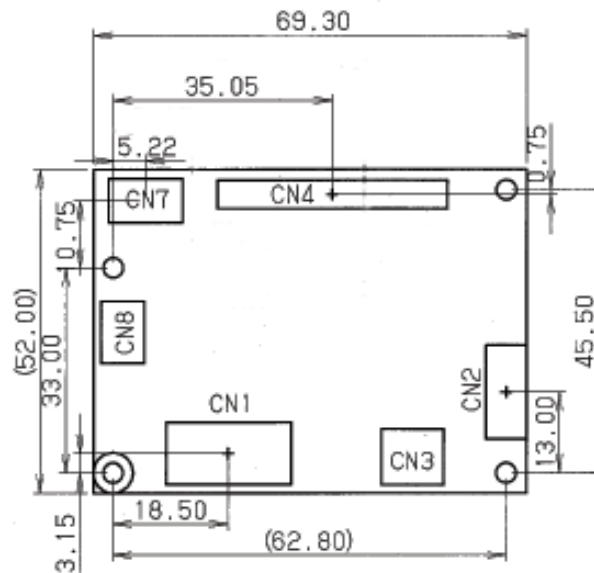

FTP-628MCL701/751#01

■ PRINTER CONNECTOR (FLEXIBLE PT BOARD) PIN ARRAYS FTP-628 MCL701

Thermal head, control circuit side connector: 52610-3090 or 3071 Molex or equivalent product

No	Signal	I/O	Contents
1	PHK	—	Cathode for photo interruptor
2	VSEN	I	Paper sensor power
3	PHE	O	Emittor for photo interruptor
4	MT B	I	Stepping motor excitation signal
5	MT \bar{B}	I	
6	MT A	I	
7	MT \bar{A}	I	
8	VH	I	Power supply for thermal head
9	VH	I	
10	DI	I	Data in
11	CLK	I	Synchronous clock for communication
12	GND	—	Ground power supply for thermal head
13	GND	—	
14	STB6	I	Thermal head energizing control signal
15	STB5	I	
16	STB4	I	
17	Vdd	I	Logic power
18	TH	O	Thermally sensitive resistor input termnial 1
19	TH	O	Thermally sensitive resistor input termnial 2
20	STB3	I	Thermal head energizing control signal
21	STB2	I	
22	STB1	I	
23	GND	—	Ground power supply for thermal head
24	GND	—	
25	\bar{LAT}	I	Data latch
26	DO	O	Data out
27	VH	I	Power supply for thermal head
28	VH	I	
29	N.C.	-	Not connected
30	N.C.	-	

Do not plug or unplug the FPC when power is on.

■ PRINTER CONNECTOR (FLEXIBLE PT BOARD) PIN ARRAYS FTP-628 MCL751#01

Thermal head, control circuit side connector: 52610-3090 or 3071 Molex or equivalent product

No	Signal	I/O	Contents
1	PHK	—	Cathode for photo interruptor
2	VSEN	I	Paper sensor power
3	PHE	O	Emitter for photo interruptor
4	N.C.	—	Not connected
5	N.C.	—	Not connected
6	VH	I	Head drive power
7	VH	I	
8	DIN	I	Data in
9	CLK	I	Synchronous clock for communication
10	GND	—	Ground power supply for thermal head
11	GND	—	
12	STB6	I	Thermal head energizing control signal
13	STB5	I	
14	STB4	I	
15	VDD	I	Logic power
16	TH	O	Thermally sensitive resistor input terminal 1
17	TH	O	Thermally sensitive resistor input terminal 2
18	STB3	I	Thermal head energizing control signal
19	STB2	I	
20	STB1	I	
21	GND	—	Ground power supply for thermal head
22	GND	—	
23	$\overline{\text{LAT}}$	I	Data latch
24	DO	O	Data out
25	VH	I	Power supply for thermal head
26	VH	I	
27	MT A	I	Stepping motor excitation signal
28	$\overline{\text{MT A}}$	I	
29	MT B	I	
30	$\overline{\text{MT B}}$	I	

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	

Единый адрес для всех регионов: fst@nt-rt.ru || www.fujitsu.nt-rt.ru