




Digital Displacement Decoder D-DD-3N-12

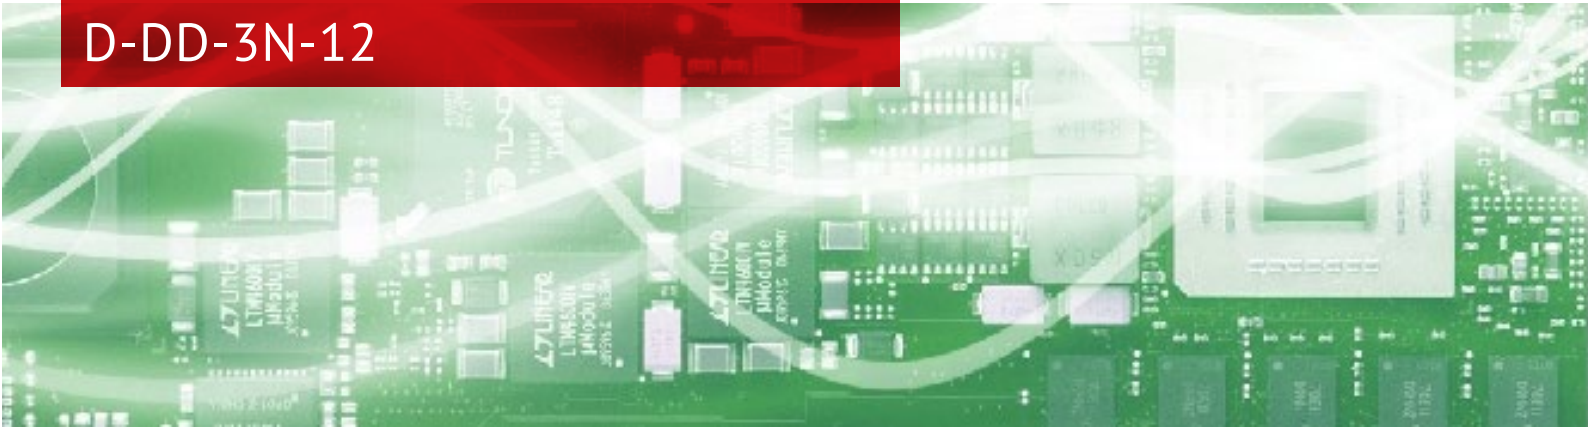

Ultrafast FPGA-based Digital Signal Processing

Optomet Vibrometers feature an end-to-end FPGA-based digital signal processing allowing a fully digital read-out of the measurement data. Digital signal processing avoids any drawbacks of analog demodulation which may result from component aging, temperature dependencies, noise and non-linearities. Significantly higher sensitivity, better resolution, and stability are the benefits of OptoMET's end-to-end digital signal processing. Extremely low noise levels produce precise results even from poorly reflecting measurement objects.

-



HIGHLIGHTS:

- Digital decoder
- 19 displacement measuring ranges
- Frequency range: DC bis 2.5 MHz
- Max. velocity up to 12 m/s
- Resolution down to 50 femtometers

Speed Displacement Decoder

All vibrometers series feature by default a velocity decoder and can be supplemented with a suitable displacement and/or acceleration decoder.

The D-DD-3N-12 displacement decoder can also measure displacements of objects with a high velocity (up to 12 m/s). The working frequency range is between DC and 2.5 MHz. It is ideally suited to supplement velocity decoder D-VD-3N-12.

Required velocity decoder: D-VD-3N-12

-

Technical data

| Pos. | Full Scale Output peak to peak | Signal Frequency Range | Max. Velocity |
|------|-----------------------------------|------------------------|---------------|
| | μm | kHz | m/s |
| 1 | 0.245 | 0 ... 2500 | 12 |
| 2 | 0.49 | 0 ... 2500 | 12 |
| 3 | 0.98 | 0 ... 2500 | 12 |
| 4 | 2.45 | 0 ... 2500 | 12 |
| 5 | 4.9 | 0 ... 2500 | 12 |
| 6 | 9.8 | 0 ... 2500 | 12 |
| 7 | 24.5 | 0 ... 2500 | 12 |
| 8 | 49 | 0 ... 2500 | 12 |
| 9 | 98 | 0 ... 2500 | 12 |
| 10 | 245 | 0 ... 2500 | 12 |
| 11 | 490 | 0 ... 2500 | 12 |
| 12 | 980 | 0 ... 2500 | 12 |
| 13 | 2,450 | 0 ... 2500 | 12 |
| 14 | 4,900 | 0 ... 2500 | 12 |
| 15 | 9,800 | 0 ... 2500 | 12 |
| 16 | 24,500 | 0 ... 2500 | 12 |
| 17 | 49,000 | 0 ... 2500 | 12 |
| 18 | 98,000 | 0 ... 2500 | 12 |
| 19 | 245,000 | 0 ... 2500 | 12 |

Range diagram

