



LED recessed downlight .

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

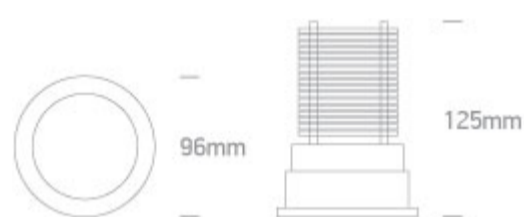

Gallery



Physical Specification

Item Group

04 Recessed Spots Adjustable LED

Family

The COB Round Spots Aluminium

Order Code

11113V/AL/W

Colour

Aluminium

Material

Natural Aluminium

Shape



Circular


Height

125mm

Diameter	96mm
Cutout Hole Diameter	81mm
Recessed Ceiling	Yes
Depth Required	140mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	13W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
IP Rating	IP20
Light Source	LED built in
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes

60 Hz
Power(Watts)
Constant Current
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal

Yes
13W
Yes
IP20

No
Plastic
Cable

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


3000K
783lm
60,23lm/W
85
50°


Packing Info

Pcs/Carton
Barcode
HS Code

32
5291889029861
9405409900

Energy Label

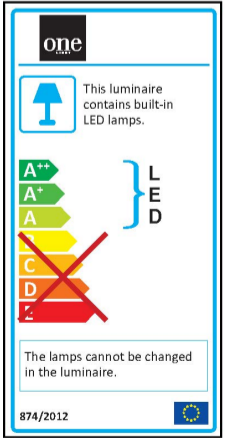

Warranty

2 Years

Weee Directive

Yes
