



15W COB LED recessed adjustable spot, for general lighting applications.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	
Family	
Order Code	
Colour	
Material	
Shape	
Height	
Diameter	
Cutout Hole Diameter	
Recessed Ceiling	
Depth Required	
Indoor	

08 Downlights Adjustable LED
The COB Pop Out Range
11115RA/W/C
White
Die Cast
Circular
90mm
105mm
90mm
Yes
70mm
Yes

Adjustable

2 Directions

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

15W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

500mA

Voltage

27,7V

Safety Class



Power(Watts)

13,35W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Bridgelux

F Mark



Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
500mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Brand
Protection

Yes
Yes
9,5-16W
0,9
Yes
19-32V
IP20

No
50°C
80°C
Plastic
Eaglerise
Short circuit Protection

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram
Dark Light

4000K
1100lm
73,33lm/W
80
36°

Yes


Packing Info

Box Length
Box Width
Box Height
Box Weight
Pcs/Carton

16,5cm
12cm
12cm
0,560
24

Barcode	5291889047759
HS Code	9405409900

Energy Label

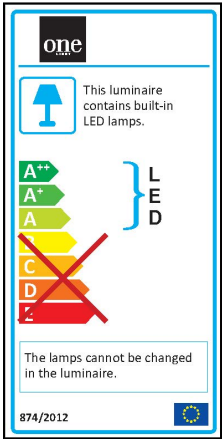

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes