




Applications



Classrooms



Retail



Home



Large surfaces









Hotels










Restaurants

Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	1.200mA
ϕ	Power factor (Cos fi)	0.96
	Dimming	No

	Measures	241x154x103mm
	Mounting position	Empotrado Techo
	Inclination	50°


	IP Tightness index	IP20
	Body color	White
	Diffuser Material	VT
	Body	AL
	Reflector	AL AN

ϕ_{LUM}	Flux (lm)	3.940lm
	Electrical isolation	CII
	Lifetime	L70>30.000h




K	Colour temperature	4.000K
	CRI Colour rendering index	>80

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions

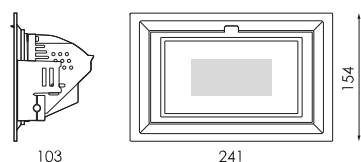

References

	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}	Δ	K	
381628	55W	58W	1200mA	4.894lm	3.940lm	80°	4.000K	241x154x103m

Photometry

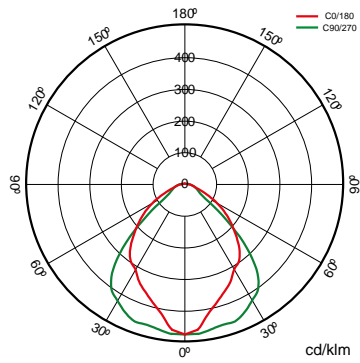

On request



Dali



Emergency kit



Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



Bluetooth package

description




Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info 

You need DALI drive