




Applications



Classrooms



Retail



Home



Large surfaces



Hotels









Restaurants








Specifications (Series luminaires)




	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	800mA
ϕ	Power factor (Cos fi)	0.96
	Dimming	No

	Measures	241x154x103mm
	Mounting position	Empotrar
	Inclination	50°

ϕ_{LUM}	Flux (lm)	2.278lm
--------------	------------------	---------

	IP Tightness index	IP20
	Body color	Black
	Diffuser Material	VT
	Body	AL
	Reflector	AL AN


	Electrical isolation	CII
---	-----------------------------	-----

	Lifetime	L70>30.000h
---	-----------------	-------------

K	Colour temperature	4.000K
	CRI Colour rendering index	>80




Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

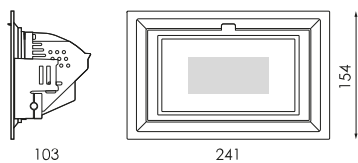Dimensions




References



	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}	Δ	K	
390958	25,8W	30W	800mA	2.784lm	2.278lm	67°	4.000K	241x154x103m

m

Photometry

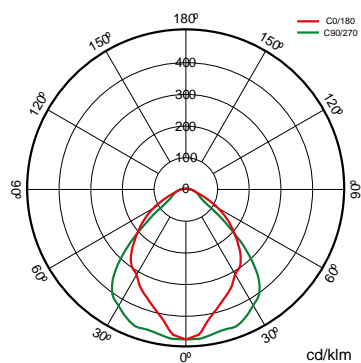

On request



Dali



Emergency kit



Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



Bluetooth package

description




Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info 

You need DALI drive