






MADE IN SPAIN Design by PRILUX



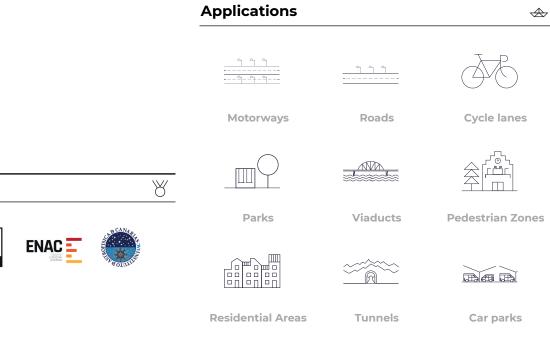



Certifications





# **Specifications (Series luminaires)**

4	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	700mA
φ	Power factor (Cos fi)	0.96
-)	LED number	24
$\bigcirc$	Dimming	8N - DALI
0	Comm. Prot. for reprogr.	CMR

${\longleftrightarrow}$	Measures	540x230x112mm
	Wind Resistance	0,124m2
Ŷ	Mounting	Crosier Mount
		1
fltc	Operating temperature	-40~+50 °C
φ <sub>lum</sub>	Flux (lm)	6290lm
	Electrical isolation	СІ
		1
( <sup>170</sup>	Lifetime	L90 B10 >200.000h
¢∕W	Efficacy	122lm/W

Ø	Body color	9007
14	Diffuser Material	VT-T
<u> </u>	Body	AL iap
К	Colour temperature	3.000K

IP66

IK10

>70

VAOOKOM

 $\stackrel{\uparrow}{\longleftrightarrow}$ 

# Dimensions

Optical

Š

Ø

. کلار

540mm

**IP Tightness index** 

IK Impact resistance


CRI Colour rendering index

Reference	es								
	W <sub>LED</sub>	W		φ	$\varphi_{_{\text{LED}}}$	Φ <sub>LUM</sub>	φ⁄W	-```	K
570220	48W	51,7W	700mA	8.479lm	7.230lm	6290lm	122lm/W	24	3.000K


# PRILUX

 $\bigotimes$ 

# Photometry



# On request

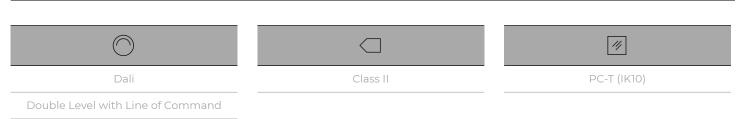

¢.		K
Available RAL colors (Consult)	PEXLOM	>70 2.700K
50 °C (Consult available powers and	PPDLOM	>80 3.000K
optics) ——	PPILOM	>80 4.000K
	S150LOM	>70 2.700K
	VA00IOP	
	VAOOLOM	
	VA01LOM	
	VA02L0M	
	VA03D0P	
	VA04D0P	
	VA05IOP	

VA06I0P

VA07L0P VA08L0M





40 0 0

Ŷ

# Light packages

			P	CA	72	22	7	27	73	50	8	27	8	30	84	40
W	-,,,		Φ <sub>lum</sub>	¢∕W	φ <sub>lum</sub>	¢∕W	Φ <sub>LUM</sub>	¢∕W	Φ <sub>LUM</sub>	¢∕W	Φ <sub>lum</sub>	¢∕W	Φ <sub>lum</sub>	¢∕W	Φ <sub>LUM</sub>	¢∕W
51,7W	24	700mA	3.126lm	60lm/W	4.766lm	92lm/W	5.656lm	109lm/W			5.074lm	98lm/W	5.074lm	98lm/W	5.349lm	103lm/W

# Mounting

Ļ		1. Crosier Mount
<b>~</b>	- ←	
	V.	





### Accessories











#### 586566

KIT ADAP. A POSTE Ø33MM VERSA-ARISA ROAD

#### 496636

KIT ADAP. A POSTE Ø42MM VERSA-ARISA ROAD

#### 496629

KIT ADAP. A POSTE Ø50MM VERSA-ARISA ROAD

#### 501743

KIT ADAP. A POSTE Ø76MM POLIVALENTE TECN. RAL9007T



Technologies



Ø





## Overstorm

OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

# SystemShield

SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.



## CMR

CMR (CORA MANAGER READY) identifies the prilux luminaires compatible with the CORA MANAGER system that provides the luminaires with control, regulation and programming.

Ø

Ø





S

(i)

## Solutions



# description

One of the key pieces to achieve the pathtowards smart cities is lighting. Lighting management systems are advancing by leapsand bounds, prioritizing primary objectives such as service quality, cost reduction and care for the environment. CORA Manager is the control system developedby Prilux that, together with our compatible luminaires that provides intelligent management of public lighting, maintaining harmony between sustainable development and quality of life forcitizens, while promoting safety and saving.

# Info

Ø

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es