



LED recessed trailing edge dimmable downlight .

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

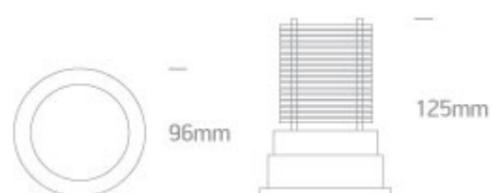

Gallery



Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The COB Round Spots Aluminium
Order Code	11126V/AL/W
Colour	Aluminium
Material	Natural Aluminium
Shape	Circular
Height	125mm

Diameter	96mm
Cutout Hole Diameter	81mm
Recessed Ceiling	Yes
Depth Required	140mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	26W
IP Rating	IP20
Light Source	LED built in
Dimmable	Yes
Dimmer type	Trailing Edge
F Mark	

Fitting	
Input Type	Constant Current
IP Rating	IP20
Light Source	LED built in
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V

50 Hz
60 Hz
Power(Watts)
Constant Current
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal

Yes
Yes
26W
Yes
IP20

No
Plastic
Cable

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram


3000K
1400lm
53,84lm/W
85
50°


Packing Info

Pcs/Carton
Barcode
HS Code

32
5291889031185
9405409900

Energy Label

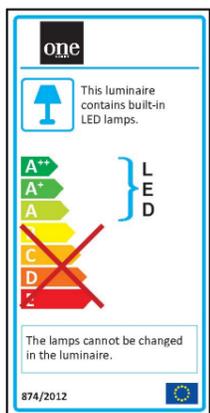

Warranty

2 Years

Weee Directive

Yes
