






MADE IN SPAIN Design by PRILUX



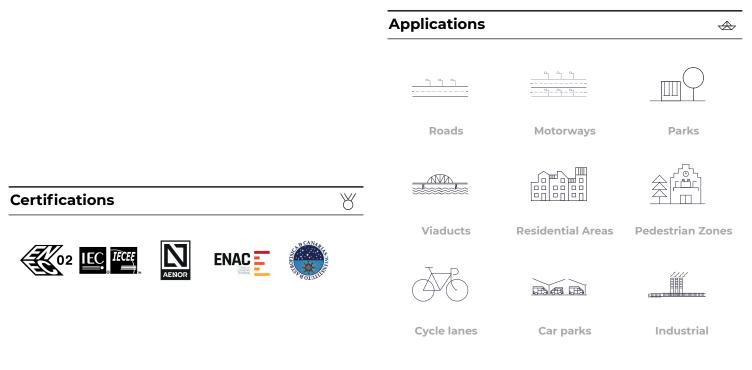





Specifications (Series luminaires)

4	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
Ð	Current (A)	700mA
φ	Power factor (Cos fi)	0.97
-)	LED number	12
\bigcirc	Dimming	8N - DALI
0	Comm. Prot. for reprogr.	CMR

IP66

IK09

9007

VT-T

AL iap

$\stackrel{\uparrow}{\longleftrightarrow}$	Measures	478x670x107mm
kg_∖	Weight	8Kg
\square	Wind Resistance	0,072m2
fl ^{tc}	Operating temperature	-40~+50°C
$\varphi_{_{\text{LUM}}}$	Flux (lm)	3.478lm
	Performance	0,85%
	Electrical isolation	CI
(²⁷⁰	Lifetime	L90 B10 >200.000h

(L ⁷⁰	Lifetime	L90 B10 >200.000h
¢∕W	Efficacy	1311m/W

K	Colour temperature	3.000K
Ŕ	CRI Colour rendering index	>70
ې ت	Optical	VAOOKOM

Prilux guarantees a ± 10% tolerance in light flux measurements.

 $\stackrel{}\longleftrightarrow$

Dimensions

×

 \odot

14


IP Tightness index

IK Impact resistance

Diffuser Material

Body color

Body



Referenc	es									
	W _{LED}	W		φ	$\varphi_{_{\text{LED}}}$	Φ _{LUM}	ф / W		-)	K
572880	24W	26,5W	700mA	4.239lm	4.092lm	3.478lm	1311m/W	0,85%	12	3.000K





VA04D0P

VA05I0P VA06I0P VA07L0P


VA08LOM VA00LOM

PEXLOM


 \bigotimes

]___

Photometry



On request

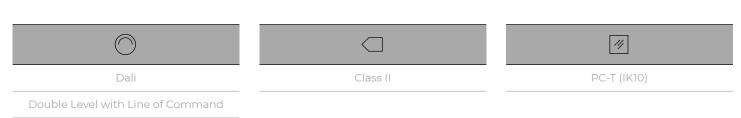

К	<pre> {</pre>	
PCAmbar	Available RAL colors (Consult)	PPDLOM
>70 2.700K		S150LOM
>80 3.000K		VA00IOP
>80 4.000K		VA01LOM
>70 2.700K		VA02L0M
		VA03D0P






40 0 0

Ŷ

Light packages

			PCA		PCA 722		727		730		827		830		840	
W	-)		Φ _{lum}	¢∕W	$\varphi_{\rm LUM}$	¢∕W	Φ _{lum}	¢∕W	Φ _{LUM}	¢∕W	Φ _{lum}	¢∕W	Φ _{lum}	¢∕W	Φ _{LUM}	¢∕W
26,5W	12	700mA	1.8511m	70lm/W	2.823lm	107lm/W	3.272lm	1231m/W			3.006lm	113lm/W	3.006lm	113lm/W	3.168lm	120lm/W

Mounting

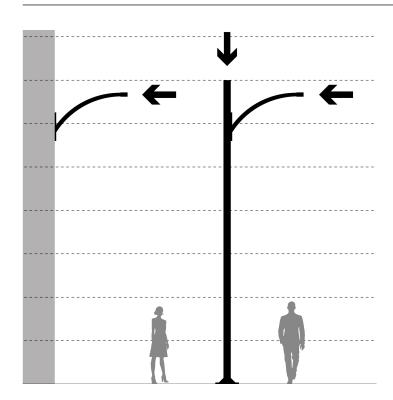





Accessories









 $\langle \bigcirc$

586566

KIT ADAP. A POSTE Ø33MM VERSA-ARISA ROAD

496636

KIT ADAP. A POSTE Ø42MM VERSA-ARISA ROAD

496629

KIT ADAP. A POSTE Ø50MM VERSA-ARISA ROAD

501743

KIT ADAP. A POSTE Ø76MM POLIVALENTE TECN. RAL9007T





Ø

Technologies





Overstorm

OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

SystemShield

Ø

Ø

SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.



CMR

CMR (CORA MANAGER READY) identifies the prilux luminaires compatible with the CORA MANAGER system that provides the luminaires with control, regulation and programming.





S

(i)

Solutions



description

WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature, CCT. WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature



description

SAFELIGHT allows the lighting of zebra crossings with road luminaires adapted with special optics for this application that illuminate with white light with a continuous level of 100%



description

Ø

Ø

One of the key pieces to achieve the pathtowards smart cities is lighting. Lighting management systems are advancing by leapsand bounds, prioritizing primary objectives such as service quality, cost reduction and care for the environment. CORA Manager is the control system developed by Prilux that, together with our compatible luminaires that provides intelligent management of public lighting, maintaining harmony between sustainable development and quality of life forcitizens, while promoting safety and saving.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es







(j)

Info

Compact design

8