











Specifications (Series luminaires)

Voltage (V)	220-240V
Frecuency (Hz)	50-60Hz
Current (A)	1.000mA
Power factor (Cos fi)	0.98
LED number	12
Dimming	8N - DALI
Comm. Prot. for reprogr.	CMR
	Frecuency (Hz) Current (A) Power factor (Cos fi) LED number Dimming

${\longleftrightarrow}$	Measures	478x478x546mm
O kg	Weight	8Kg
\square	Wind Resistance	0,188m2
ftc	Operating temperature	-40~+50°C
$\varphi_{_{\text{LUM}}}$	Flux (lm)	4.511lm
	Electrical isolation	CI
(²⁷⁰	Lifetime	L90 B10 >200.000h
¢∕W	Efficacy	116lm/W


L O O O	IP Tightness index	IP66
, L	IK Impact resistance	IK09
\odot	Body color	9007
14	Diffuser Material	VT-T
<u> </u>	Body	AL iap

K	Colour temperature	3.000K
Ŕ	CRI Colour rendering index	>70
ک ر	Optical	VA00K0M

Prilux guarantees a ± 10% tolerance in light flux measurements.

 $\stackrel{ }{\longleftrightarrow}$

Dimensions






Reference	25								
	W_ LED	W		ф	$\varphi_{_{\text{LED}}}$	Φ _{LUM}	ф / /V	-).	K
573429	36W	38,8W	1000mA	5.700lm	5.435lm	4.5111m	116lm/W	12	3.000K






 \bigotimes

Photometry



On request



<pre></pre>	کې د د	K
Available RAL colors (Consult)	VA00IOP	>70 2.700K
	VA00L0M	>80 3.000K
	VA01LOM	>80 4.000K
	VA02L0M	>70 2.700K
	VA03D0P	
	VA04D0P	
	 VA05I0P	
	VA06I0P	
	VA07L0P	
	VA08LOM	






Light packages

			PC	CA	7	722 72		727		730		827		830		840	
W	-)		$\varphi_{\rm LUM}$	¢∕W	Φ _{lum}	¢∕W	φ _{lum}	¢∕W	Φ _{LUM}	¢∕W	Φ _{lum}	¢∕W	Φ _{lum}	¢∕W	$\varphi_{\rm LUM}$	¢∕W	
38,8W	12	1.000mA	2.241lm	61lm/W	3.665lm	94lm/W	4.244lm	1091m/W			3.903lm	1011m/W	3.903lm	1011m/W	4.113lm	106lm/W	

Mounting

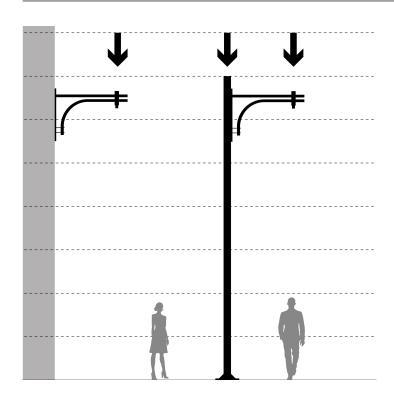

Ŷ

40 0 0





RAL9007T

Accessories $\langle \bigcirc$ MM MM MM 586573 581417 579827 501743 KIT ADAP. A POSTE KIT ADAP. A POSTE KIT ADAP. A POSTE KIT ADAP. A POSTE Ø33MM ARISA TOP Ø42MM ARISA TOP Ø50MM ARISA TOP Ø76MM POLIVALENTE TECN.





Ø

Technologies





Overstorm

OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

SystemShield

Ø

Ø

SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.



CMR

CMR (CORA MANAGER READY) identifies the prilux luminaires compatible with the CORA MANAGER system that provides the luminaires with control, regulation and programming.





S

(i)

Solutions



description

WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature, CCT. WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature



description

SAFELIGHT allows the lighting of zebra crossings with road luminaires adapted with special optics for this application that illuminate with white light with a continuous level of 100%



description

Ø

Ø

One of the key pieces to achieve the pathtowards smart cities is lighting. Lighting management systems are advancing by leapsand bounds, prioritizing primary objectives such as service quality, cost reduction and care for the environment. CORA Manager is the control system developed by Prilux that, together with our compatible luminaires that provides intelligent management of public lighting, maintaining harmony between sustainable development and quality of life forcitizens, while promoting safety and saving.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es