





#### **Applications**









Roads

**Parks** 

**Viaducts** 







**Residential Areas** 

**Pedestrian Zones** 

Cycle lanes



Certifications













Car parks





#### **Specifications (Series luminaires)** 4 $\longleftrightarrow$ Voltage (V) 220-240V Measures 478x478x546mm O kg Hz Frecuency (Hz) 50-60Hz Weight 8Kg Current (A) 500mA **Wind Resistance** 0,188m2 φ Power factor (Cos fi) 0.95 **LED** number 32 Operating temperature -40~+50°C 8N - DALI **Dimming** $\varphi_{_{\text{LUM}}}$ Comm. Prot. for reprogr. CMR Flux (lm) 6.809lm **IP Tightness index** IP66 **Electrical isolation IK Impact resistance** IK09 L90 B10 >200.000h $\bigcirc$ **Body color** 9007 Lifetime 11/ VT-T **Diffuser Material** φ**/**W **Efficacy** 138lm/W Body AL iap K **Colour temperature** 4.000K Prilux guarantees a ± 10% tolerance in light flux measurements. Ø >70 **CRI Colour rendering index** 777. Optical VA00K0M

#### **Dimensions**








References											
	V <sub>LED</sub>	W		ф	ф	Ф	φ/W	<u>-\ -</u>	K		
573535	48W	49,2W	500mA	8.828lm	8.204lm	6.809lm	138lm/W	32	4.000K		



#### **Photometry**





On request

1



Class II



Double Level with Line of Command



PC-T (IK10)

K	
PCAmbar	_
>70 2.700K	_
>80 3.000K	_
>80 4.000K	_
>70 2.700K	



<del>深</del>
VA00I0P
VAOOLOM
VAOILOM
VA02L0M
VA03D0P
VA04D0P
VA05I0P
VA06I0P
VA07L0P
VA08L0M




### Light packages



		PCA		722		727		730		827		830		840		
W	-\		ф	φ <b>/</b> W	ф	φ⁄W	Ф	<b>∳</b> /W	ф	φ⁄W	Ф	<b>∳</b> /W	ф	φ⁄W	ф	φ <b>/</b> W
49,2W	32	500mA	3.552lm	72lm/W	5.258lm	107lm/W	6.093lm	124lm/W			5.598lm	114lm/W	5.598lm	114lm/W	5.901lm	120lm/W

Mounting "

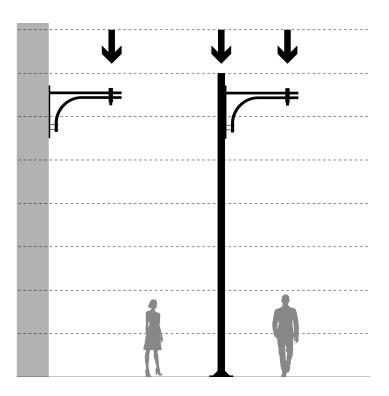





Accessories

3 "

3 ...

3 "

...

586573

KIT ADAP. A POSTE Ø33MM ARISA TOP 581417

KIT ADAP. A POSTE Ø42MM ARISA TOP 579827

KIT ADAP. A POSTE Ø50MM ARISA TOP 501743

KIT ADAP. A POSTE Ø76MM POLIVALENTE TECN. RAL9007T

# Arisa Top 1 573535



Technologies Establishment 
E





#### **Overstorm**



#### SystemShield



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.



#### **CMR**



CMR (CORA MANAGER READY) identifies the prilux luminaires compatible with the CORA MANAGER system that provides the luminaires with control, regulation and programming.



S Solutions



### Was Outdoor

## Cora Manager

#### description



WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature, CCT. WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature



### Safelight

#### description



SAFELIGHT allows the lighting of zebra crossings with road luminaires adapted with special optics for this application that illuminate with white light with a continuous level of 100%

#### description



One of the key pieces to achieve the pathtowards smart cities is lighting. Lighting management systems are advancing by leapsand bounds, prioritizing primary objectives such as service quality, cost reduction and care for the environment. CORA Manager is the control system developedby Prilux that, together with our compatible luminaires that provides intelligent management of public lighting, maintaining harmony between sustainable development and quality of life forcitizens, while promoting safety and saving.

#### Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es