











Specifications (Series luminaires)

4	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
Ð	Current (A)	700mA
φ	Power factor (Cos fi)	0.97
	LED number	32
\bigcirc	Dimming	8N - DALI
0	Comm. Prot. for reprogr.	CMR

${\longleftrightarrow}$	Measures	478x478x546mm
O /kg	Weight	8Kg
	Wind Resistance	0,188m2
ftc	Operating temperature	-40~+50°C
$\varphi_{_{\text{LUM}}}$	Flux (lm)	9075lm
	Electrical isolation	СІ
(¹⁷⁰	Lifetime	L90 B10 >200.000h
¢∕W	Efficacy	132lm/W


	IP Tightness index	IP66
``↓	IK Impact resistance	IK09
00	Body color	9007
14	Diffuser Material	VT-T
<u> </u>	Body	AL iap

Κ	Colour temperature	4.000K	
Ŕ	CRI Colour rendering index	>70	P
<u>'</u>	Optical	VA00K0M	

Prilux guarantees a ± 10% tolerance in light flux measurements.

 $\stackrel{}\longleftrightarrow$

Dimensions






Reference	25								
	V LED	W		φ	$\varphi_{_{\text{LED}}}$	$\varphi_{_{\text{LUM}}}$	ф / /V	-"	K
573559	64W	68,7W	700mA	11831lm	10934lm	9075lm	1321m/W	32	4.000K






 \bigotimes

Photometry



On request



К		
PCAmbar	Available RAL colors (Consult)	VA00I0P
 >70 2.700K		VAOOLOM
>80 3.000K		VA01LOM
>80 4.000K		VA02L0M
 >70 2.700K		VA03D0P

VA0010P
VAOOLOM
VA01LOM
VA02L0M
VA03D0P
VA04D0P
VA05IOP
VA06I0P
VA07L0P
VA08LOM






Light packages

			РСА		PCA		7:	22	7:	27	73	30	82	27	8	30	84	40
W	-)		$\varphi_{\rm LUM}$	¢∕W	$\varphi_{\rm LUM}$	¢∕W	$\varphi_{\rm LUM}$	¢∕W	$\varphi_{_{\text{LUM}}}$	¢∕W	Φ _{lum}	¢∕W	$\varphi_{\rm LUM}$	¢∕W	$\varphi_{\rm LUM}$	¢∕W		
68,7W	32	700mA	4.596lm	67lm/W	7.008lm	102lm/W	8.122lm	118lm/W			7.462lm	109lm/W	7.462lm	109lm/W	7.865lm	114lm/W		

Mounting

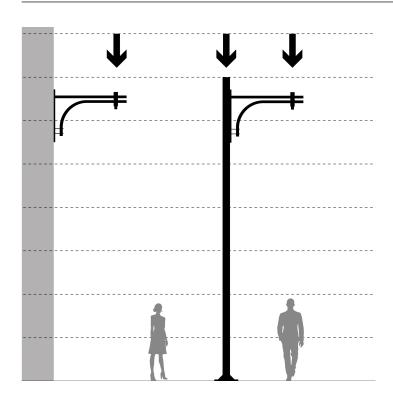

 $\left\langle \cdot \right\rangle$

40 0 0





RAL9007T

Accessories $\langle \bigcirc$ MM MM MM 586573 581417 579827 501743 KIT ADAP. A POSTE KIT ADAP. A POSTE KIT ADAP. A POSTE KIT ADAP. A POSTE Ø33MM ARISA TOP Ø42MM ARISA TOP Ø50MM ARISA TOP Ø76MM POLIVALENTE TECN.





Ø

Technologies





Overstorm

OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

SystemShield

Ø

Ø

SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.



CMR

CMR (CORA MANAGER READY) identifies the prilux luminaires compatible with the CORA MANAGER system that provides the luminaires with control, regulation and programming.





S

(i)

Solutions



description

WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature, CCT. WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature



description

SAFELIGHT allows the lighting of zebra crossings with road luminaires adapted with special optics for this application that illuminate with white light with a continuous level of 100%



description

Ø

Ø

One of the key pieces to achieve the pathtowards smart cities is lighting. Lighting management systems are advancing by leapsand bounds, prioritizing primary objectives such as service quality, cost reduction and care for the environment. CORA Manager is the control system developed by Prilux that, together with our compatible luminaires that provides intelligent management of public lighting, maintaining harmony between sustainable development and quality of life forcitizens, while promoting safety and saving.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es