



MADE IN SPAIN
Design by PRILUX



Applications



Monuments



Fairgrounds



Facades




















Historic buildings



Cultural spaces

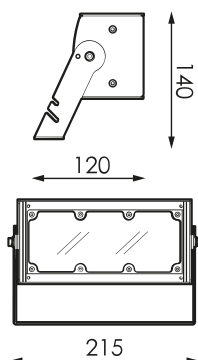
Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	1.400mA
ϕ	Power factor (Cos fi)	0.97
	LED number	12
	Dimming	No
	IP Tightness index	IP67
	IK Impact resistance	IK10
	Body color	9007
	Body	FE
K	Colour temperature	4.000K
	CRI Colour rendering index	>70
	Optical	S060L0P






	Measures	215x140x120mm
	Weight	1.8Kg
	Wind Resistance	0,018m2
	Operating temperature	-40~+40°C
	Surges protection	No
ϕ_{LUM}	Flux (lm)	6.168lm
	Electrical isolation	CI
	Lifetime	L90B10>200.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions



References

	W_{LED}		ϕ_{LED}	ϕ_{LUM}			
628532	52 máx.	1400mA	6.892lm	6.168lm	12	TAAQ-S060L0P	No

On request



K

>70 3.000K

>70 5.000K

>80 3.000K

>80 4.000K

>80 4.000K

Accessories



480307

ACCESS. 3P TANEK
ARCH CONNECTOR

480291

ACCESS. 2P TANEK
ARCH CONNECTOR

480635

ACCES. SUPPORT
BOX TANEK ARQ
REMOTE

628716

CONNECTION KIT
TANEK ARQ NEO
REMOTE 5M

Accessories



628723

CONNECTION KIT
TANEK ARQ NEO
REMOTE 10M



628730

CONNECTION KIT
TANEK ARQ NEO
REMOTE 20M

Technologies



Overstorm

Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

Warning



The RSSY remote installation systems are indivisibly composed of HEXAGON RSSY floodlights connected to a POWER BOX(not included in the luminaire). The POWER BOX must be purchased separately. Check with your local sales representative for the best combination adapted to your installation.