


## 14 Wall & Ceiling LED>Adjustable Display Spots

# 12108LA/B/W

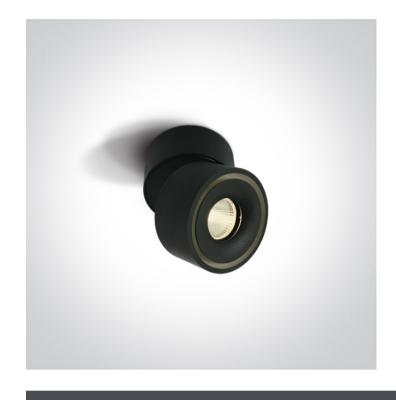

8W COB LED adjustable ceiling downlight, ideal for residential and commercial illumination.

Complete with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



## Downloads









### Dimensions



#### **Physical Specification**

Item Group	14 Wall & Ceiling LED
Family	Adjustable Display Spots
Order Code	12108LA/B/W
Colour	Black
Material	Aluminium
Shape	Circular
Height	40mm
Diameter	78mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Adjustable	2 Directions

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	8W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	200mA
Voltage	35V
Power(Watts)	7W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Cree
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	5,4-8W
Power Factor	0,9

27-40V  IP Rating  IP Rating  IP 20  Safety Class  Dimmable  No  Housing Material  Brand  Colour Temperature  Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  25°  Illumination Diagram  Dark Light  Packing Info
Safety Class  Dimmable  Housing Material  Brand  Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Yes
Dimmable No Housing Material Plastic  Brand SECOCO   Illumination Data  Colour Temperature 3000K  Lumen Output 600Im  Light Efficiency 75Im/W  CRI 80  Beam Angle 25°  Illumination Diagram  Dark Light Yes
Housing Material  Brand  SECOCO  Illumination Data  Colour Temperature 2000lm  Lumen Output 600lm  Light Efficiency 75lm/W  CRI 80  Beam Angle 25°  Illumination Diagram Dark Light Yes
Brand  Ellumination Data  Colour Temperature 3000K  Lumen Output 600Im  Light Efficiency 75Im/W  CRI 80  Beam Angle 25°  Illumination Diagram Dark Light Yes  Packing Info
Illumination Data  Colour Temperature 3000K  Lumen Output 600Im  Light Efficiency 75Im/W  CRI 80  Beam Angle 25°  Illumination Diagram Dark Light Yes
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info
Lumen Output 600 lm   Light Efficiency 75 lm/W   CRI 80   Beam Angle 25°   Illumination Diagram \textstyle{\textst
Light Efficiency  CRI  Beam Angle  Illumination Diagram  Dark Light  Packing Info
CRI Beam Angle Illumination Diagram Dark Light  Packing Info
Beam Angle  Illumination Diagram  Dark Light  Packing Info
Dark Light   Yes   Packing Info
Dark Light Yes  Packing Info
Packing Info
Box Length 10,5cm
Box Width 10,5cm
Box Height 11cm
Pcs/Carton 24
Barcode 5291889058908
HS Code 9405409900

Warranty	2 Years
Weee Directive	Yes

Certification & Warranty