


14 Wall & Ceiling LED>LED Fashion Cylinders

12122C/B/W

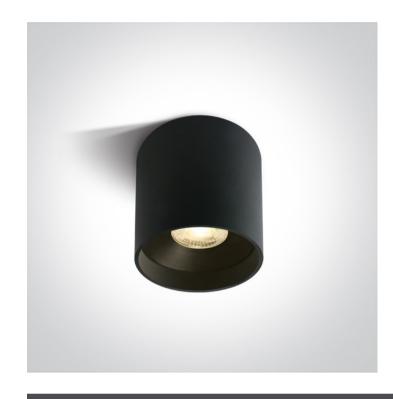

22W COB LED Cylinder, ideal for residential and commercial illumination.

Complete with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions




Physical Specification

Item Group	14 Wall & Ceiling LED
Family	LED Fashion Cylinders
Order Code	12122C/B/W
Colour	Black
Material	Die Cast
Shape	Circular
Height	100mm
Diameter	100mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	22W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	39,4V
Power(Watts)	19,7W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Bridgelux
Gear	
Gear Type	Led Driver
Innut Valtage	
Input Voltage	220-240V
50 Hz	220-240V Yes
50 Hz	Yes
50 Hz 60 Hz	Yes

Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram 3000K 1500Im 68,18Im/W 90 38°	Constant Current	Yes
Dimmable	500mA	30-42V
Dimmable	IP Rating	IP20
Housing Material Plastic	Safety Class	
Brand Kegu	Dimmable	No
Colour Temperature	Housing Material	Plastic
Colour Temperature 3000K Lumen Output 1500Im Light Efficiency 68,18Im/W CRI 90 Beam Angle 38° Illumination Diagram	Brand	Kegu
Colour Temperature 3000K Lumen Output 1500Im Light Efficiency 68,18Im/W CRI 90 Beam Angle 38° Illumination Diagram		
Colour Temperature 3000K Lumen Output 1500lm Light Efficiency 68,18lm/W CRI 90 Beam Angle 38° Illumination Diagram	Illumination Data	
Lumen Output 1500lm Light Efficiency 68,18lm/W CRI 90 Beam Angle 38° Illumination Diagram ✓ Packing Info 14,5cm Box Length 14cm Box Width 11cm Pcs/Carton 20 Barcode 5291889059370		
Light Efficiency 68,18lm/W CRI 90 Beam Angle 38° Illumination Diagram Illumination Diagram Packing Info 14,5cm Box Length 14cm Box Width 11cm Pcs/Carton 20 Barcode 5291889059370		
CRI 90 Beam Angle 38° Illumination Diagram ✓ Box Length 14,5cm Box Width 14cm Box Height 11cm Pcs/Carton 20 Barcode 5291889059370	Lumen Output	1500lm
Beam Angle 38° Illumination Diagram ✓ Packing Info 14,5cm Box Length 14cm Box Width 14cm Box Height 11cm Pcs/Carton 20 Barcode 5291889059370	Light Efficiency	68,18lm/W
Box Length 14,5cm Box Width 14cm Box Height 11cm Pcs/Carton 20 Barcode 5291889059370	CRI	90
Packing Info Box Length 14,5cm Box Width 14cm Box Height 11cm Pcs/Carton 20 Barcode 5291889059370	Beam Angle	38°
Box Length 14,5cm Box Width 14cm Box Height 11cm Pcs/Carton 20 Barcode 5291889059370	Illumination Diagram	
Box Length 14,5cm Box Width 14cm Box Height 11cm Pcs/Carton 20 Barcode 5291889059370		
Box Width14cmBox Height11cmPcs/Carton20Barcode5291889059370	Packing Info	
Box Width14cmBox Height11cmPcs/Carton20Barcode5291889059370		
Box Height 11cm Pcs/Carton 20 Barcode 5291889059370		
Pcs/Carton 20 Barcode 5291889059370		14cm
Barcode 5291889059370	Box Height	11cm
	Pcs/Carton	20
HS Code 9405409900	Barcode	5291889059370
	HS Code	9405409900
Energy Label	Energy Label	



Certification & Warranty	
Warranty	2 Years
Weee Directive	Yes