


14 Wall & Ceiling LED>Mirror Square Boxes

12906B/W/W

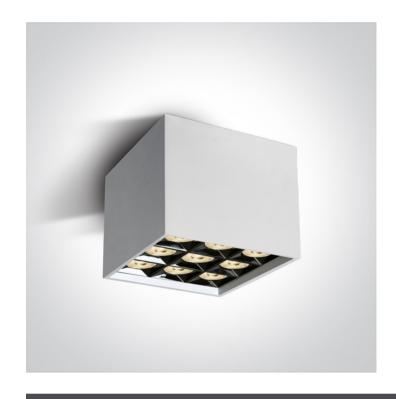

30W COB LED surface Spot with dark chrome reflector.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions




Physical Specification

Item Group	14 Wall & Ceiling LED
Family	Mirror Square Boxes
Order Code	12906B/W/W
Colour	White
Material	Aluminium
Shape	Rectangular
Length	123mm
Width	123mm
Height	88mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	40V
Safety Class	
Power(Watts)	28W
Power(Watts) IP Rating	28W IP20
IP Rating	IP20
IP Rating Light Source	IP20 LED built in
IP Rating Light Source LED Type	IP20 LED built in COB
IP Rating Light Source LED Type LED Brand	IP20 LED built in COB Cree
IP Rating Light Source LED Type LED Brand LED Number	IP20 LED built in COB Cree
IP Rating Light Source LED Type LED Brand LED Number	IP20 LED built in COB Cree
IP Rating Light Source LED Type LED Brand LED Number F Mark	IP20 LED built in COB Cree
IP Rating Light Source LED Type LED Brand LED Number F Mark	LED built in COB Cree 9 F

60 Hz	Yes
Power(Watts)	19,6-29,4W
Power Factor	0,9
Constant Current	Yes
700mA	28-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Eaglerise
llumination Data	
	3000K
Colour Temperature	3000K
Colour Temperature Lumen Output	2400lm
Colour Temperature	
Colour Temperature Lumen Output	2400lm
Colour Temperature Lumen Output Light Efficiency	2400lm 80lm/W
Colour Temperature Lumen Output Light Efficiency CRI	2400lm 80lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	2400lm 80lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	2400lm 80lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	2400lm 80lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	2400lm 80lm/W 90
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	2400lm 80lm/W 90 38°

Energy Label



Certification & Warranty		

Warranty	3 Years
Weee Directive	Yes