


PLAN VIEW

1" = 200'
Planimetric DGN Provided by TxDOT

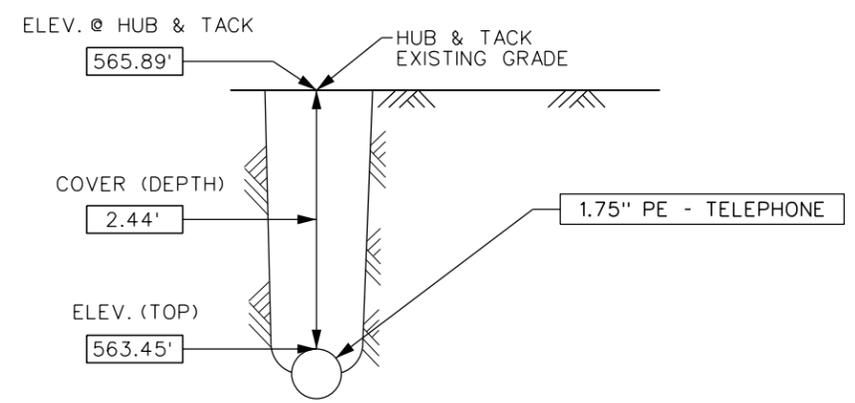

UTILITY CROSS-SECTION VIEW

NOT TO SCALE

COMPANY	CONTACT	PHONE	EMAIL
AT&T	MARC COSTELLO	972-470-7577	MC9971@ATT.COM


LEGEND

- TH — UTILITY DESCRIPTION
- ⊙ TEST HOLE LOCATION
- UTILITY SECTION

PROJECT CONTROL:
CONTROL POINTS:
E0435127 N:7080222.677 E:2559400.000 EL:574.27'
E0435137 N:7084239.674 E:2556875.671 EL:596.22'

PROJECTION ZONE: 4202 NORTH CENTRAL ZONE
UNIT: US SURVEY FEET
GEOID: 12B
TEST HOLE MARKER: 5/8" CAPPED IRON ROD

NOTE: SURVEYED USING THE TXDOT VRS NETWORK

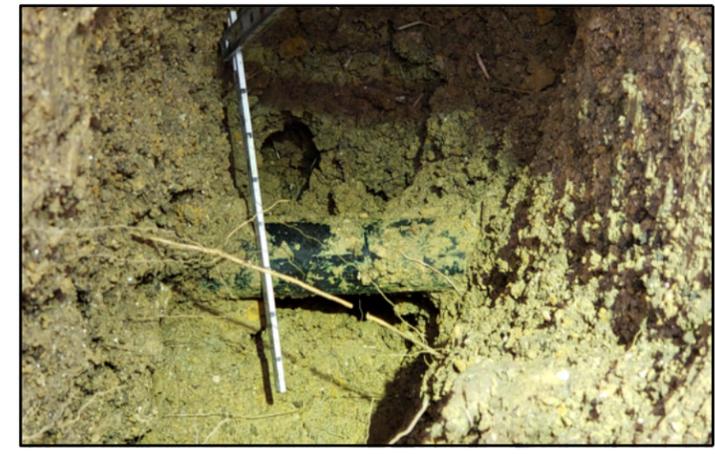

TEST HOLE PHOTO OF UTILITY



PHOTO OF DEPTH INFORMATION



LOCATION MAP

NOT TO SCALE

LOCATION:	APPROX. 35' N OF E. LUCAS RD EOP APPROX. 28' E OF LOST VALLEY DR EOP		
UTILITY STATION/OFFSET:	73+51.05 / 54.92' LT		
HORIZONTAL DATUM:	NAD 83' (2011), NORTH CENTRAL(4202)		
SURFACE ADJUSTMENT FACTOR:	1.000152710 (COLLIN)		
VERTICAL DATUM:	NAVD 88, GEOID 12B		
TEST HOLE NO.:	3-3	POINT NUMBER:	65006
NORTHING:	7084026.604	EASTING:	2559318.813
GROUND ELEVATION:	565.89'	DEPTH OF UTILITY:	2.44'
FIELD MANAGER:	JAE KOONTZ		
DATE OF WORK:	1/31/2022		
VACUUM TRUCK NO.:	4424		
UTILITY INFORMATION			
DESCRIPTION:	TEST HOLE LOCATION BASED ON LEVEL B FIELD DATA.		
UTILITY OWNER:	AT&T		
UTILITY TYPE:	TELEPHONE		
UTILITY SIZE:	1.75"	T.O.U.	563.45'
UTILITY MATERIAL:	PE		
UTILITY UNCOVERED?	YES		
SURFACE MATERIAL:	NATURAL GROUND		
PAVEMENT TYPE/DEPTH:	N/A		



NO.	DATE	REVISION	APPROV.



FM 1378
TEST HOLE DATA SHEET
LEVEL A SUE


DESIGNED	JS	FED. NO.	6	FEDERAL AID PROJECT NO.		PROJECT	FM 1378
DRAWN	CM	STATE	TX	DISTRICT	DALLAS	COUNTY	COLLIN
CHECKED	JS	CONTROL		SECTION		JOB	
APPROVED	MH		1392		01		048

243J

4/25/2022 10:49:07 AM P:\30118066.07 FM 1378\DGN\SHEETS\2022 SHEETS\FM 1378 SUE_TH 3-3.dgn

SUMMARY OF SMALL SIGNS

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

PLAN SHEET NO.	SIGN NO.	SIGN NOMENCLATURE	SIGN	DIMENSIONS	FLAT ALUMINUM (TYPE A)	EXAL ALUMINUM (TYPE G)	SM RD SGN ASSM TY XXXXX (X) XX (X-XXXX)				BRIDGE MOUNT CLEARANCE SIGNS (See Note 2)		
							POST TYPE	POSTS	ANCHOR TYPE	MOUNTING DESIGNATION		TYPE N	TYPE S
										PREFABRICATED	1EXT or 2EXT = # of Ext BM = Extruded Wind Beam WC = 1.12 #/ft Wing Channel EXAL= Extruded Alum Sign Panels		
			FM 1378 AT FM 3286										
	A		STREET NAME SIGNS										
	B		PROVIDED BY THE										
	D		CITY OF LUCAS										
	*C	R10-3eR	 X 2	9" X 15"	X								
	*F												
	*E	R10-3eL	 X 2	9" X 15"	X								
	*G												
	H	W3-3		30" X 30"	X								

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080"
7.5 to 15	0.100"
Greater than 15	0.125"

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website:
<http://www.txdot.gov/>

- NOTE:**
- Sign supports shall be located as shown on the plans, except that the Engineer may shift the sign supports, within design guidelines, where necessary to secure a more desirable location or to avoid conflict with utilities. Unless otherwise shown on the plans, the Contractor shall stake and the Engineer will verify all sign support locations.
 - For installation of bridge mount clearance signs, see Bridge Mounted Clearance Sign Assembly (BMCS) Standard Sheet.
 - For Sign Support Descriptive Codes, see Sign Mounting Details Small Roadside Signs General Notes & Details SMD(GEN).

* SUBSIDIARY TO ITEM 680






SUMMARY OF SMALL SIGNS

SOSS

FILE: slums16.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT May 1987	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392 01	044, ETC.	FW 139, ETC.	
	DIST	COUNTY	SHEET NO.	
	DAL	COLLIN	244	

LEGEND

-  EXISTING MAST ARM SIGNAL WITH HEAD NUMBERS AND 250 WATT EQ LED LUMINAIRE
-  E1 EXISTING SIGNAL POLE NUMBER
-  EXISTING CONDUIT
-  EXISTING POLE MOUNTED CONTROLLER CABINET WITH EVP
-  EXISTING MAST ARM SIGN
-  EXISTING ELECTRICAL SERVICE
-  V1 EXISTING VIVDS CAMERA AND NUMBER
-  R1 EXISTING RADAR DETECTOR AND NUMBER
-  PHASED WORK ZONE AREA
-  TEMPORARY PAVEMENT
-  WORK ZONE DRUMS
-  EXISTING BBU
-  OH OVERHEAD ELECTRIC LINE
-  R.O.W. RIGHT OF WAY
-  EXISTING OPTICOM
-  EXISTING GROUND BOX
-  EXISTING POLE WITH SSR ANTENNA
-  TRAFFIC FLOW

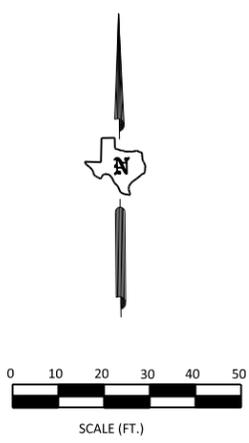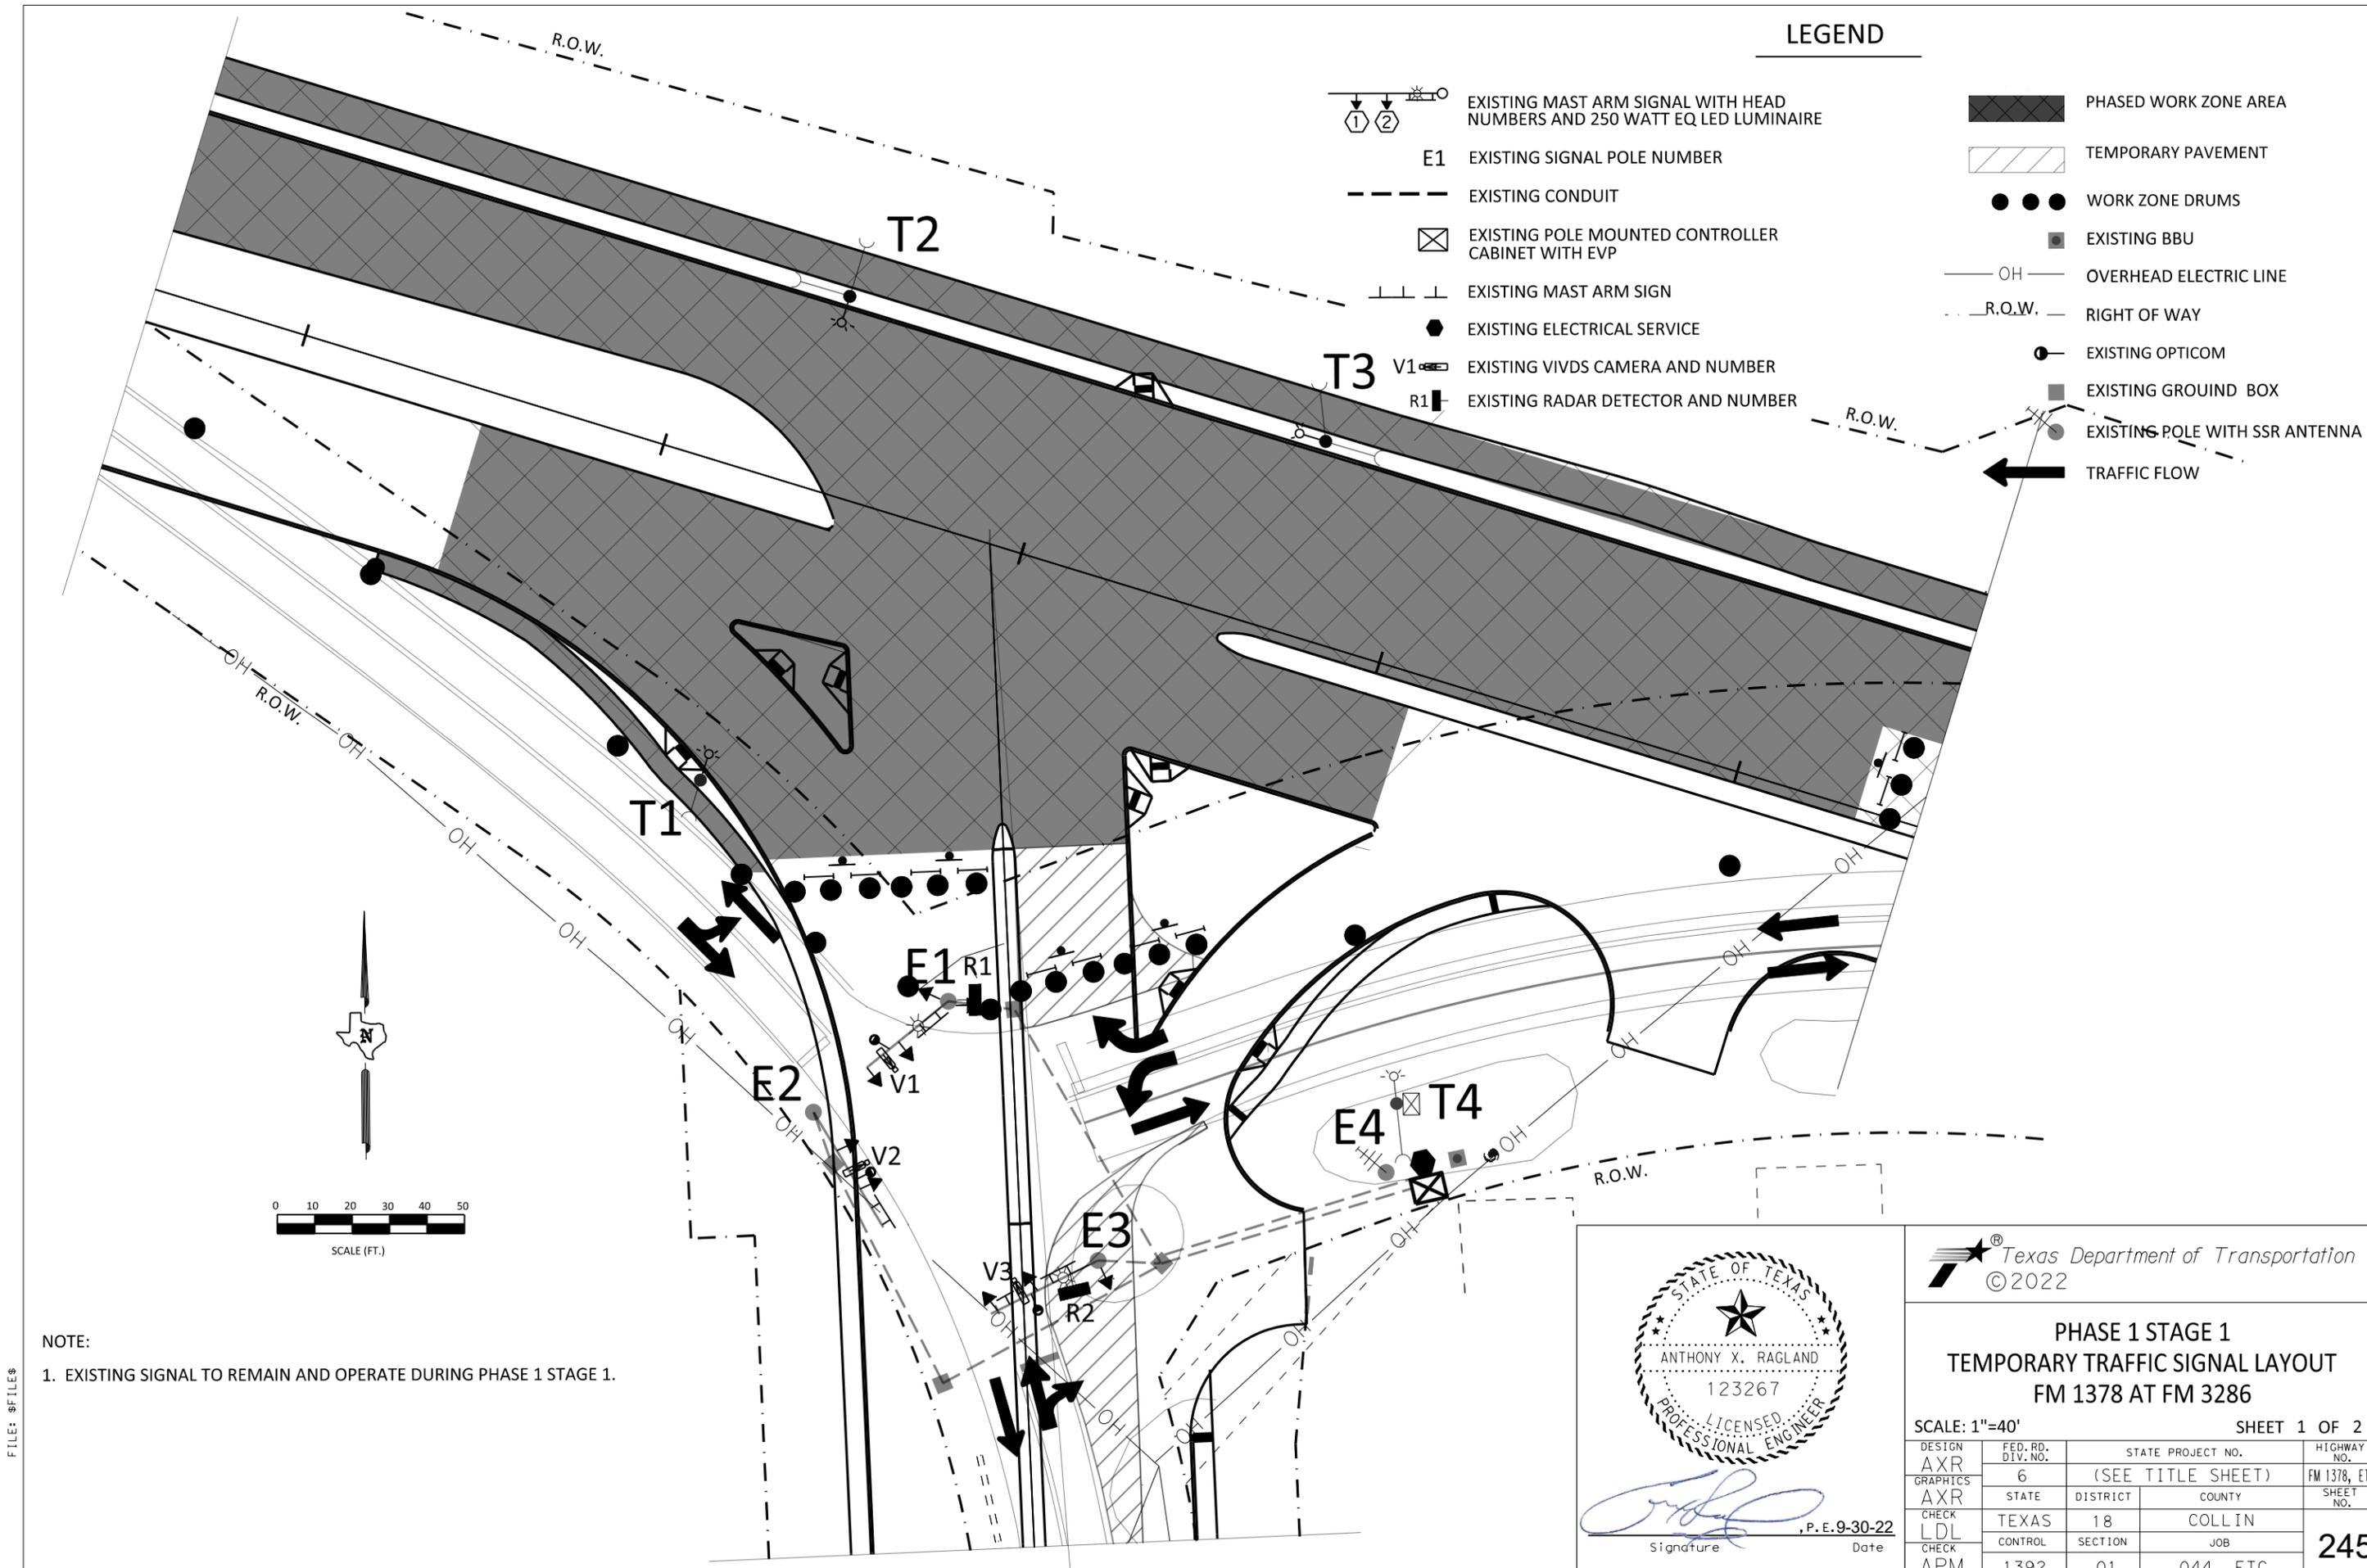

NOTE:
1. EXISTING SIGNAL TO REMAIN AND OPERATE DURING PHASE 1 STAGE 1.



ANTHONY X. RAGLAND
123267
LICENSED PROFESSIONAL ENGINEER

[Signature]
Signature

P.E. 9-30-22
Date

 Texas Department of Transportation
© 2022



**PHASE 1 STAGE 1
TEMPORARY TRAFFIC SIGNAL LAYOUT
FM 1378 AT FM 3286**

SCALE: 1"=40'		SHEET 1 OF 2	
DESIGN AXR	FED. RD. DIV. NO. 6	STATE PROJECT NO. (SEE TITLE SHEET)	
GRAPHICS AXR	STATE	DISTRICT 18	HIGHWAY NO. FM 1378, ETC
CHECK LDL	TEXAS	COUNTY COLLIN	SHEET NO.
CHECK APM	CONTROL	SECTION 01	JOB 044, ETC
			245

LEGEND

- E1 EXISTING POLE NUMBER
- T1 TEMPORARY POLE NUMBER
- EXISTING CONDUIT

-  TEMPORARY PAVEMENT
-  R.O.W. RIGHT OF WAY
-  TRAFFIC FLOW
-  EXISTING FLASHER ASSEMBLY
-  PROPOSED SIGN ASSEMBLY

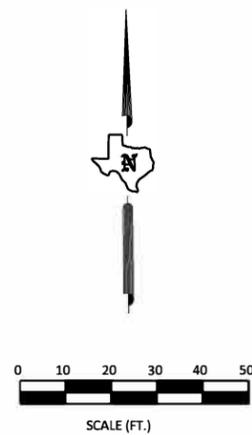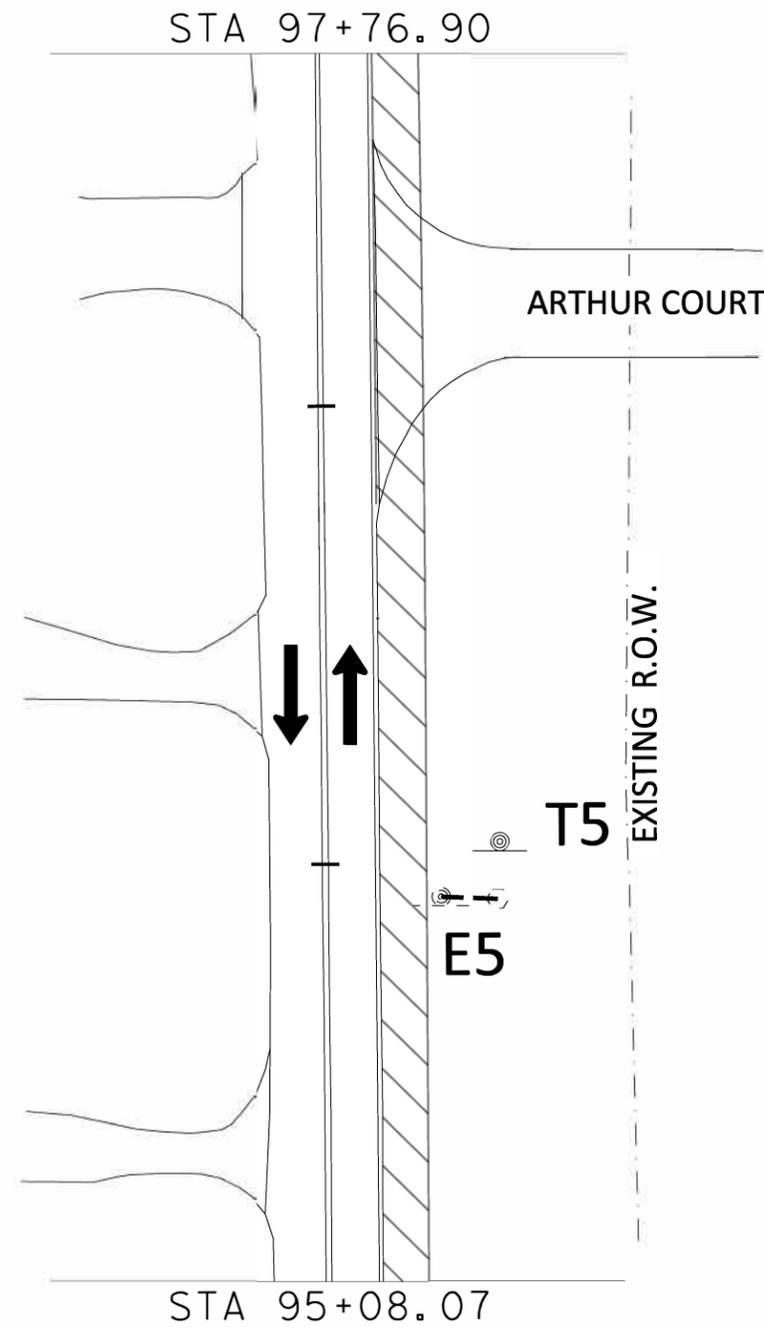

NOTE:

1. EXISTING E5 FLASHER ASSEMBLY TO BE SALVAGED AND RELOCATED TO NEW LOCATION SHOWN ON THE PERMANENT SIGNAL LAYOUT SHEET 2 OF 5.
2. USE THE EXISTING E5 W3-3 SIGN AND INSTALL T5 STATIC SIGN ASSEMBLY WITH FLAGS.

FILE: \$FILE\$

Signature _____ Date **9-30-22**

 Texas Department of Transportation
© 2022

**PHASE 1 STAGE 1
TEMPORARY TRAFFIC SIGNAL LAYOUT
FM 1378 AT FM 3286**

SCALE: 1"=40' SHEET 2 OF 2

DESIGN	FED. RD. DIV. NO.	STATE PROJECT NO.		HIGHWAY NO.
AXR	6	(SEE TITLE SHEET)		FM 1378, ETC
GRAPHICS	STATE	DISTRICT	COUNTY	SHEET NO.
AXR	TEXAS	18	COLLIN	246
CHECK	CONTROL	SECTION	JOB	
LDL	1392	01	044, ETC	
CHECK	APM			


LEGEND

- PROPOSED WOOD SPAN SIGNAL WITH HEAD NUMBERS AND 250 WATT EQ LED LUMINAIRES
- T1 TEMPORARY SIGNAL POLE NUMBER
- PROPOSED CONDUIT WITH RUN NUMBER
- PROPOSED POLE MOUNTED CONTROLLER CABINET WITH BBU AND EVP
- STREET NAME SIGN
- EXISTING ELECTRICAL SERVICE
- V1 PROPOSED VIVDS CAMERA AND NUMBER
- PHASED WORK ZONE AREA
- TEMPORARY PAVEMENT
- WORK ZONE DRUMS
- VIVDS DETECTION ZONE
- OVERHEAD ELECTRIC LINE
- R.O.W. RIGHT OF WAY
- OPTICOM
- CONCRETE BARRIER
- TRAFFIC FLOW

NOTES:

1. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE. VERIFY LOCATIONS PRIOR TO CONSTRUCTION.
2. SIGNAL ELEMENTS SHOWN ARE DIAGRAMMATIC. EXACT LOCATIONS TO BE DETERMINED IN THE FIELD.
3. REUSE THE EXISTING SERVICE. INSTALL CONDUIT RUN NO. 17 FROM PROPOSED TEMPORARY SIGNAL CABINET ON T4 AND STUB UP TO THE BASE OF THE EXISTING SERVICE. THE INTERSECTION SHALL BE UNDER "ALL WAY STOP" WHILE THE TEMPORARY SIGNAL CABINET AND SERVICE ARE WIRED.
4. SALVAGE AND REUSE EXISTING OPTICOM EQUIPMENT AND INSTALL ON THE TEMPORARY SPAN WIRE SIGNAL AND IN THE TEMPORARY CABINET. THE CITY OF LUCAS SHALL PROVIDE OPTICOM CABLE TO THE CONTRACTOR FOR INSTALLATION. CONTACT FIRE CHIEF TED STEPHENS AT 972-727-1248 WHEN READY TO INSTALL THE EQUIPMENT. PAYMENT SUBSIDIARY TO ITEM 681.
5. SALVAGE THE EXISTING TRAFFIC SIGNAL POLE ASSEMBLIES, HEADS, BBU, SIGNAL CABINET AND SSR ANTENNA WITH POLE AND DELIVER TO THE DISTRICT SIGNAL SHOP. CONTACT CHRISTOPHER McDANIEL AT 214-320-6682 48 HOURS IN ADVANCE OF DELIVERY OF THE SIGNAL EQUIPMENT.
6. RELOCATE EXISTING R10-12 SIGN TO TEMPORARY SIGNAL. STREET NAME SIGNS PROVIDED BY THE CITY OF LUCAS.

FILE: \$FILE\$

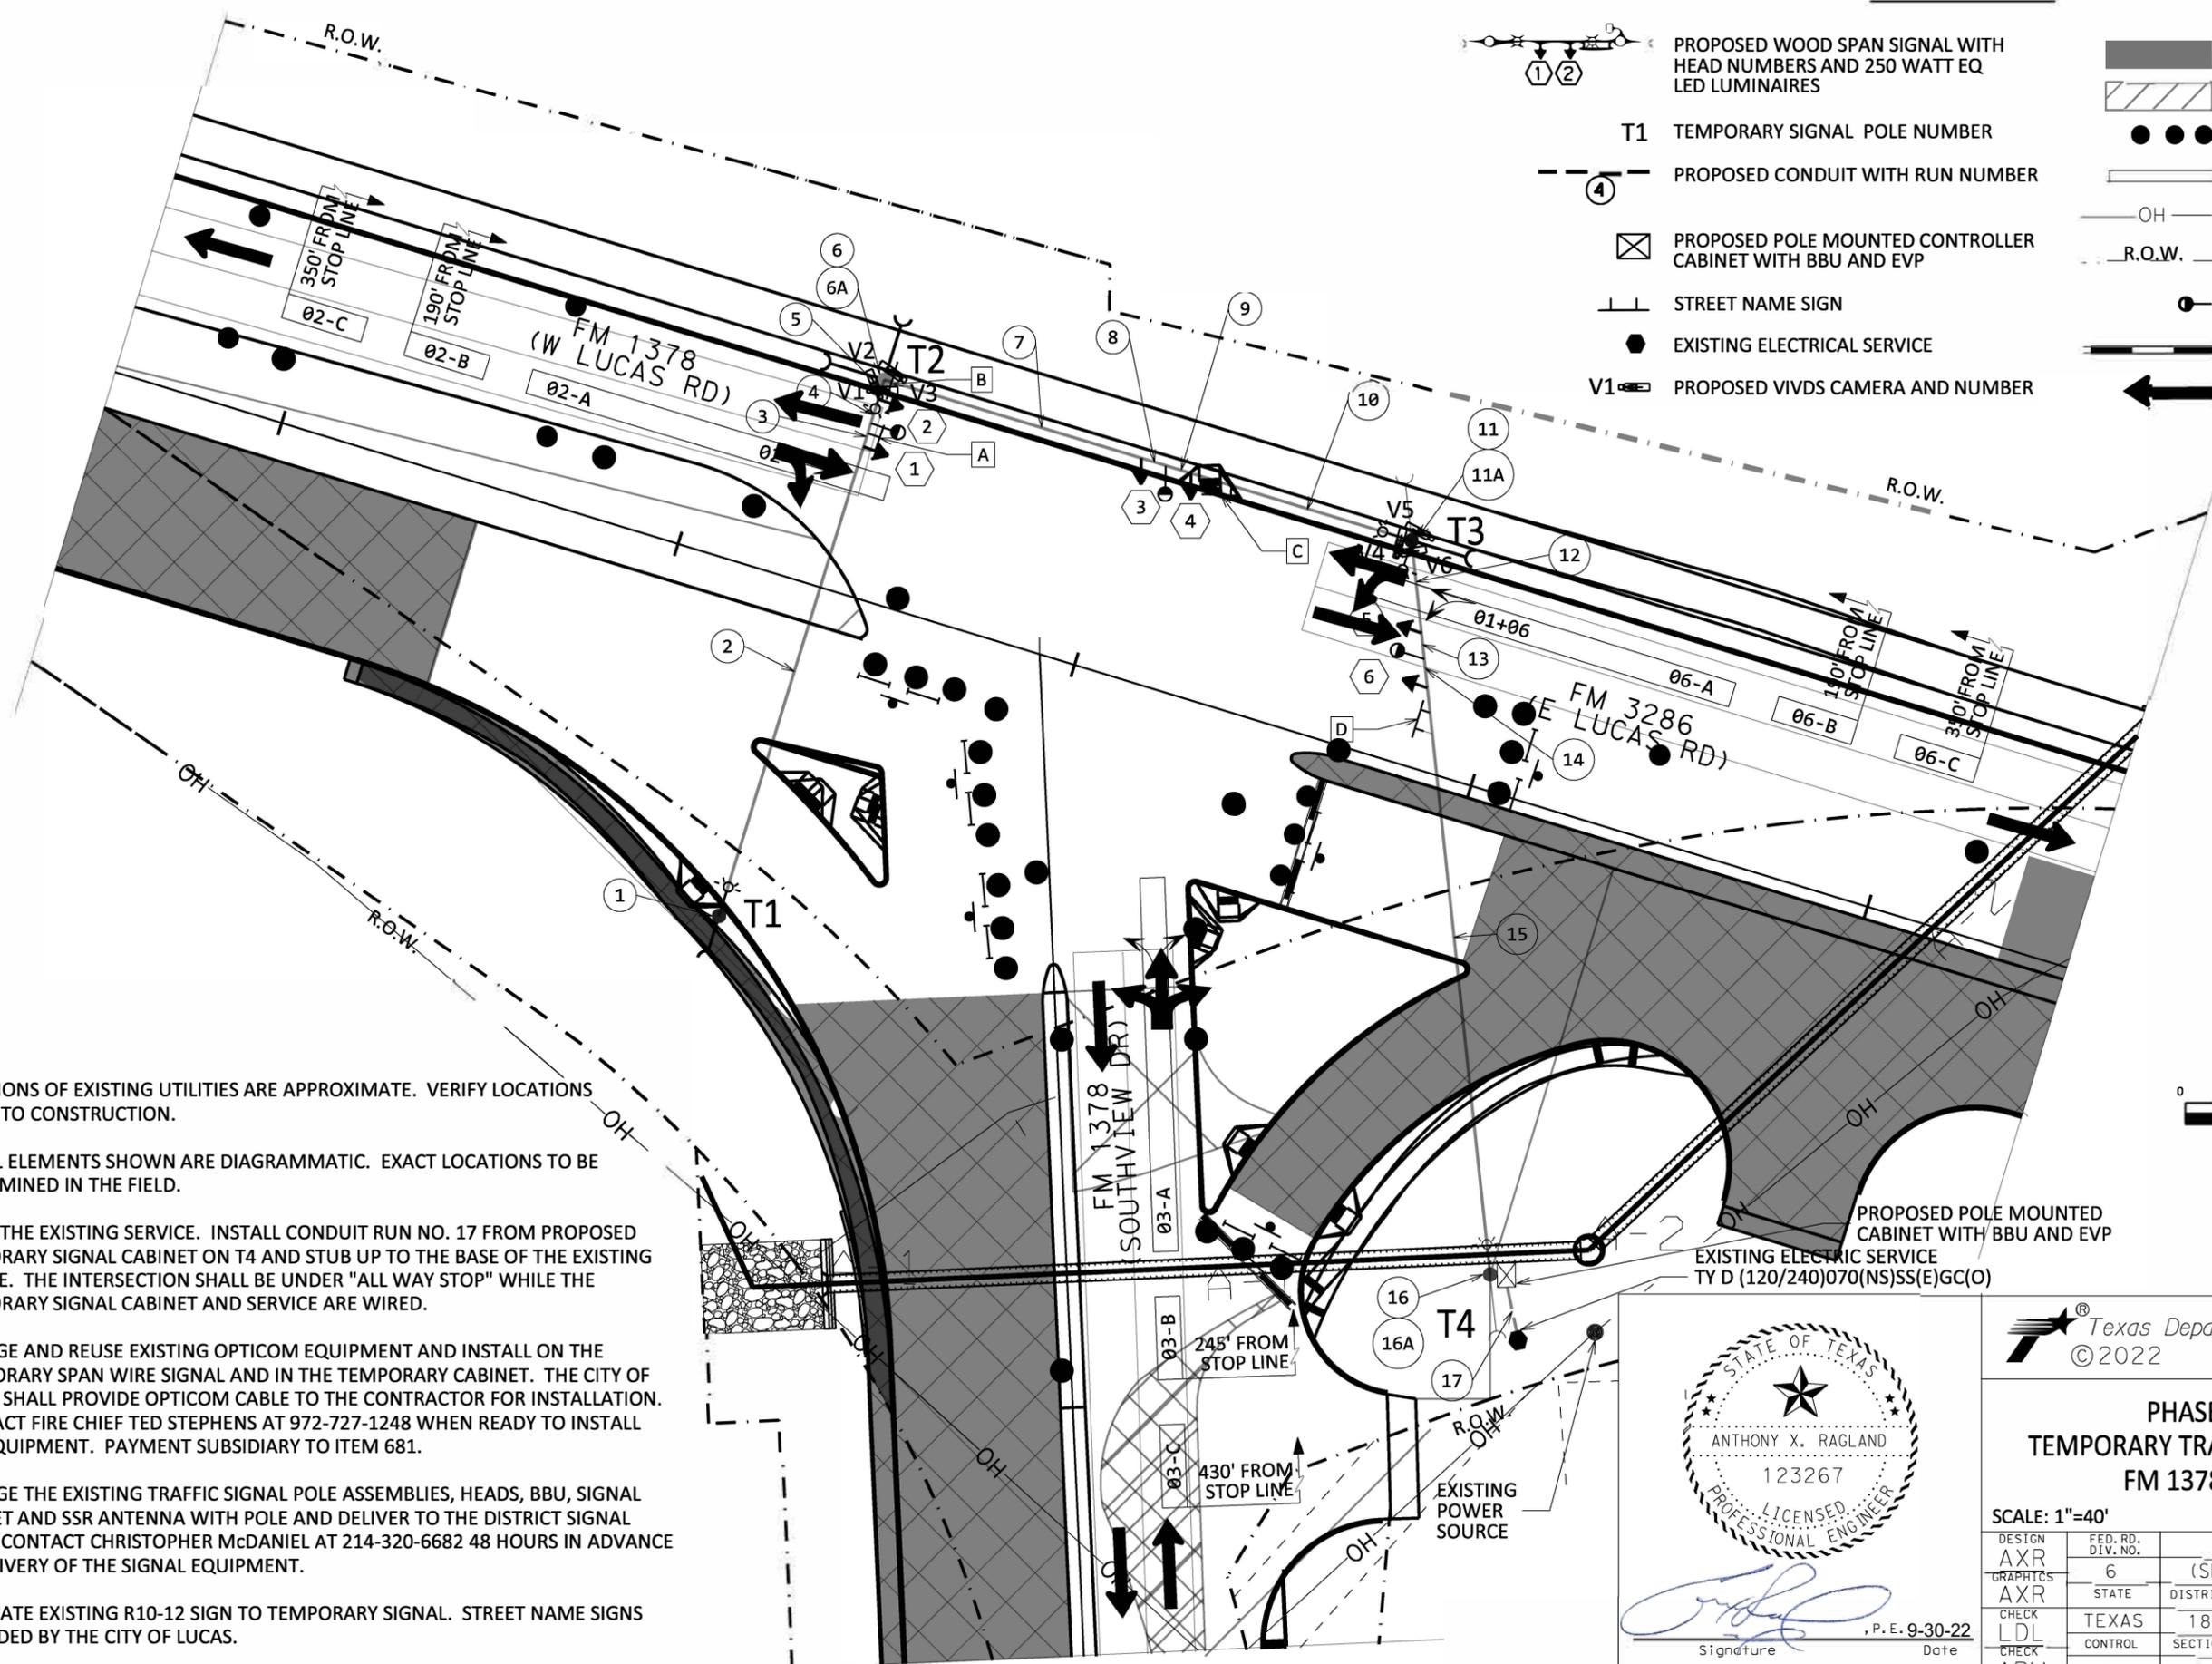

[Signature]
 Signature Date P. E. 9-30-22


Texas Department of Transportation © 2022

**PHASE 1 STAGE 2
 TEMPORARY TRAFFIC SIGNAL LAYOUT
 FM 1378 AT FM 3286**

SCALE: 1"=40' SHEET 1 OF 3

DESIGN	FED. RD. DIV. NO.	STATE PROJECT NO.		HIGHWAY NO.
AXR	6	(SEE TITLE SHEET)		FM 1378, ETC
GRAPHICS	STATE	DISTRICT	COUNTY	SHEET NO.
AXR	TEXAS	18	COLLIN	247
CHECK	CONTROL	SECTION	JOB	
LDL	1392	01	044, ETC	
CHECK				
APM				

CONDUIT RUNS													
RUN NO.	CONDUIT TYPE (LF)				CABLE AND WIRE SIZE TYPE (EA)					DETECTION		LENGTH OF RUN (LF)	RUN NO.
	2" RM	4" RM	2" PVC SCH 80 (TRENCH)	OVERHEAD	NO.6 BARE	NO.6 XHHW	NO.8 XHHW	5 CNDR CABLE 14 AWG TY A	7 CNDR CABLE 14 AWG TY A	VIVDS CABLE	OPTICOM CABLE *		
1	20				1		2					20	1
2				116			2					116	2
3				6			2		1			6	3
4				6			2		1	1		6	4
5				20			2	1	1		1	3	5
6	20				1		2					20	6
6A	10				1					1		10	6A
7				63			2	1	1	3	1	63	7
8				6			2	2	1	3	1	6	8
9				6			2	2	1	3	2	6	9
10				54			2	2	1	3	2	54	10
11	20				1		2					20	11
11A	10				1					2		10	11A
12				20			2	2	1	6	2	20	12
13				6			2	3	1	6	2	6	13
14				6			2	3	1	6	3	6	14
15				143			2	3	1	6	3	143	15
16	20				1		2	3				20	16
16A		20			1		4	3	1	6	3	20	16A
17	5		14		1	2	4					14	17
TOTAL LENGTH	105	20	14	452	125	38	1260	840	356	1587	774		TOTAL LENGTH

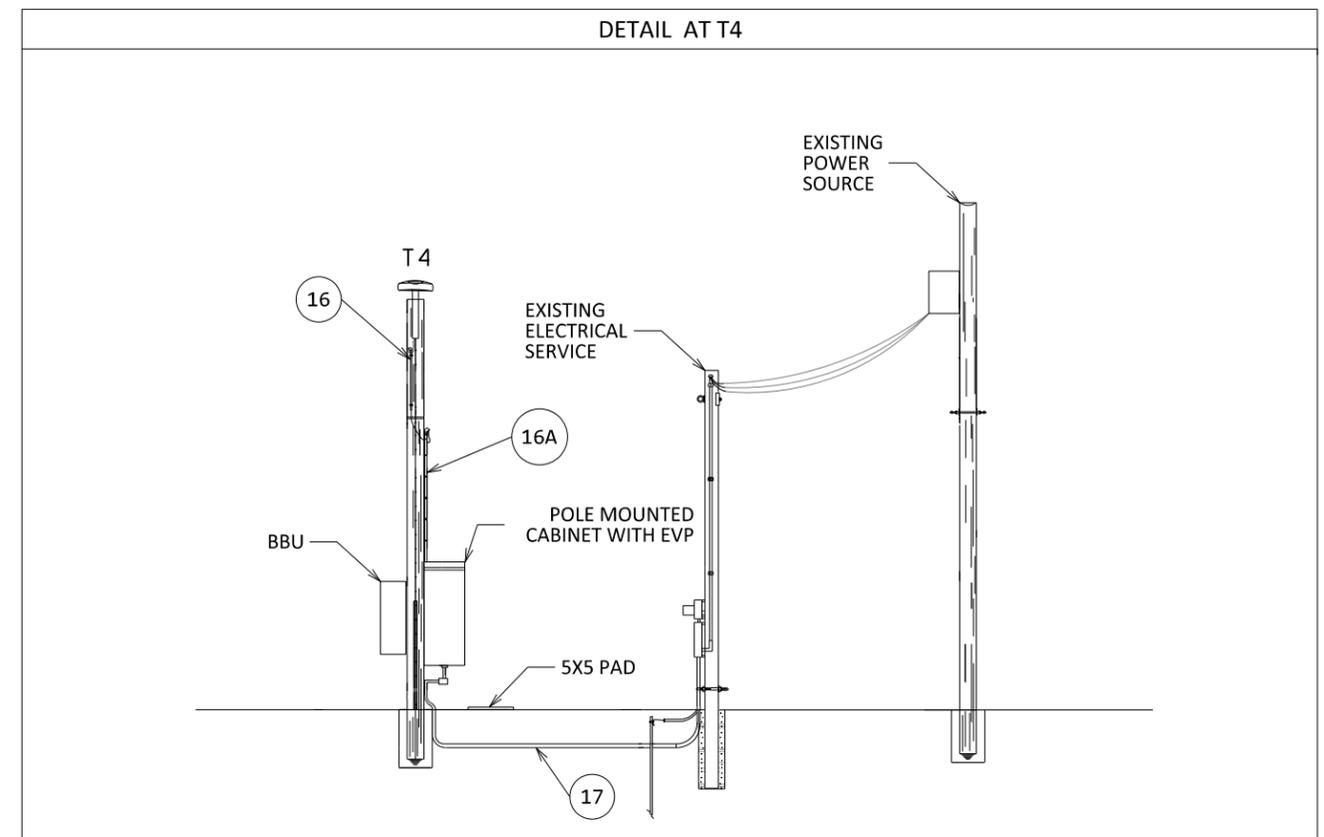


NOTES:

* CABLE PROVIDED BY THE CITY AND INSTALLED BY THE CONTRACTOR. INSTALLATION PAID FOR UNDER ITEM 681.

IN RUNS NO. 1,6, 11 AND 16 THE LENGTH OF THE NO. 8 INSULATED CABLE IS MEASURED TO THE END OF THE LUMINAIRE ARM.

VIVDS DETECTION ZONES					
VIVDS NUMBER	MOUNTING LOCATION	ZONE LOCATION	MOUNTING HEIGHT (FT)	SETBACK DISTANCE (FT)	ZONE
V1	POLE T2	SETBACKS	30	190	02-B
				350	02-C
V2	POLE T2	STOPBAR	20	N/A	03-A
V3	POLE T2	STOPBAR	20	N/A	06-A
V4	POLE T3	SETBACKS	30	245	03-B
				430	03-C
V5	POLE T3	SETBACKS	30	190	06-B
				350	06-C
V6	POLE T3	STOPBAR	20	N/A	02-A


CABLE TERMINATION CHART				
CNDR COLOR	CABLE 1 & 2 SPAN T1-T2 CONTROLLER		CABLE 3 SPAN T2-T3 CONTROLLER	CABLE 4 SPAN T3-T4 CONTROLLER
	7 CNDR	5 CNDR	5 CNDR	5 CNDR
BLACK	SPARE	SPARE	SPARE	SPARE
WHITE	SIG. COMMON	SIG. COMMON	SIG. COMMON	SIG. COMMON
RED	SH 1 06 R	SH 2 06 R	SH 3,4 03 R	SH 5,6 02 R
GREEN	SH 1 06 G	SH 2 06 G	SH 3,4 03 G	SH 5,6 02 G
ORANGE	SH 1 06 Y	SH 2 06 Y	SH 3,4 03 Y	SH 5,6 02 Y
BLUE	SH 1 01 G			
WHITE/BLACK	SH 1 01 Y			

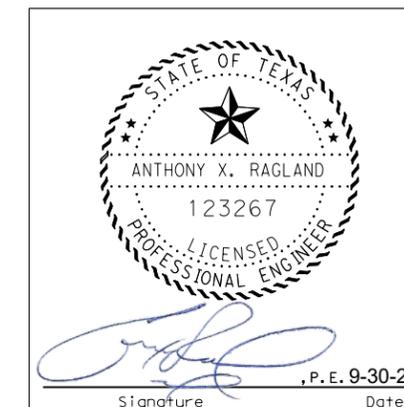

PHASE 1 STAGE 2
TEMPORARY TRAFFIC SIGNAL LAYOUT
FM 1378 AT FM 3286





SCALE: 1"=40'			SHEET 2 OF 3	
DESIGN AXR	FED. RD. DIV. NO. 6	STATE PROJECT NO. (SEE TITLE SHEET)		HIGHWAY NO. FM 1378, ETC
GRAPHICS AXR	STATE	DISTRICT 18	COUNTY COLLIN	SHEET NO.
CHECK LDL	TEXAS	SECTION	JOB	248
CHECK APM	CONTROL 1392	01	044, ETC	

SIGNAL HEADS									
SIGNAL HEAD NUMBER	12" SIGNAL INDICATION								
	SIGNAL HEAD TYPE	BACK PLATE		VEH SIGNAL SECT WITH LED LAMP					
		3-SEC (EA)	5-SEC (EA)	←G (EA)	G (EA)	↙ (EA)	Y (EA)	←R (EA)	R (EA)
2,3,4,5,6	H3	5			5	5			5
1	H5LT		1	1	1	1	1		1
TOTAL		5	1	1	6	1	6		6



SIGNAL HEAD AND POLE PLACEMENT					
SPAN	A	B	C	D	NO. OF HEADS
T1 TO T2	165	130	12	23	2
T2 TO T3	125	57	12	56	2
T3 TO T4	165	41	12	112	2

STRANDED STEEL CABLE CALCULATION						
POLE #	T1	T2	T3	T4	WIRE SIZE	LENGTH (LF)
SPAN	165	125	165		1/4"	455
TOTAL	482	402	482		3/8"	1366

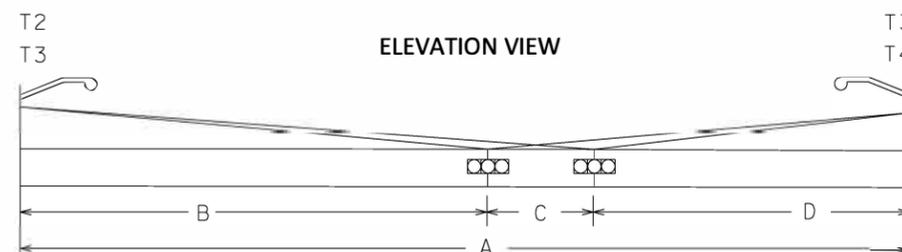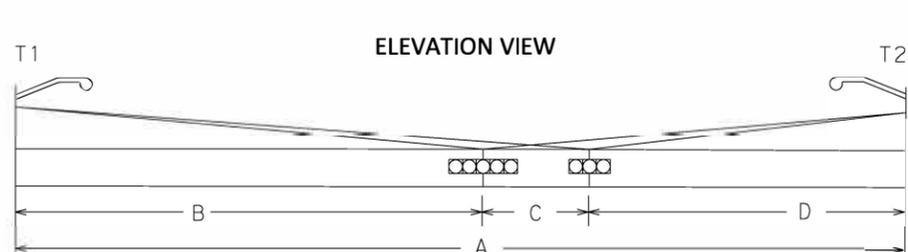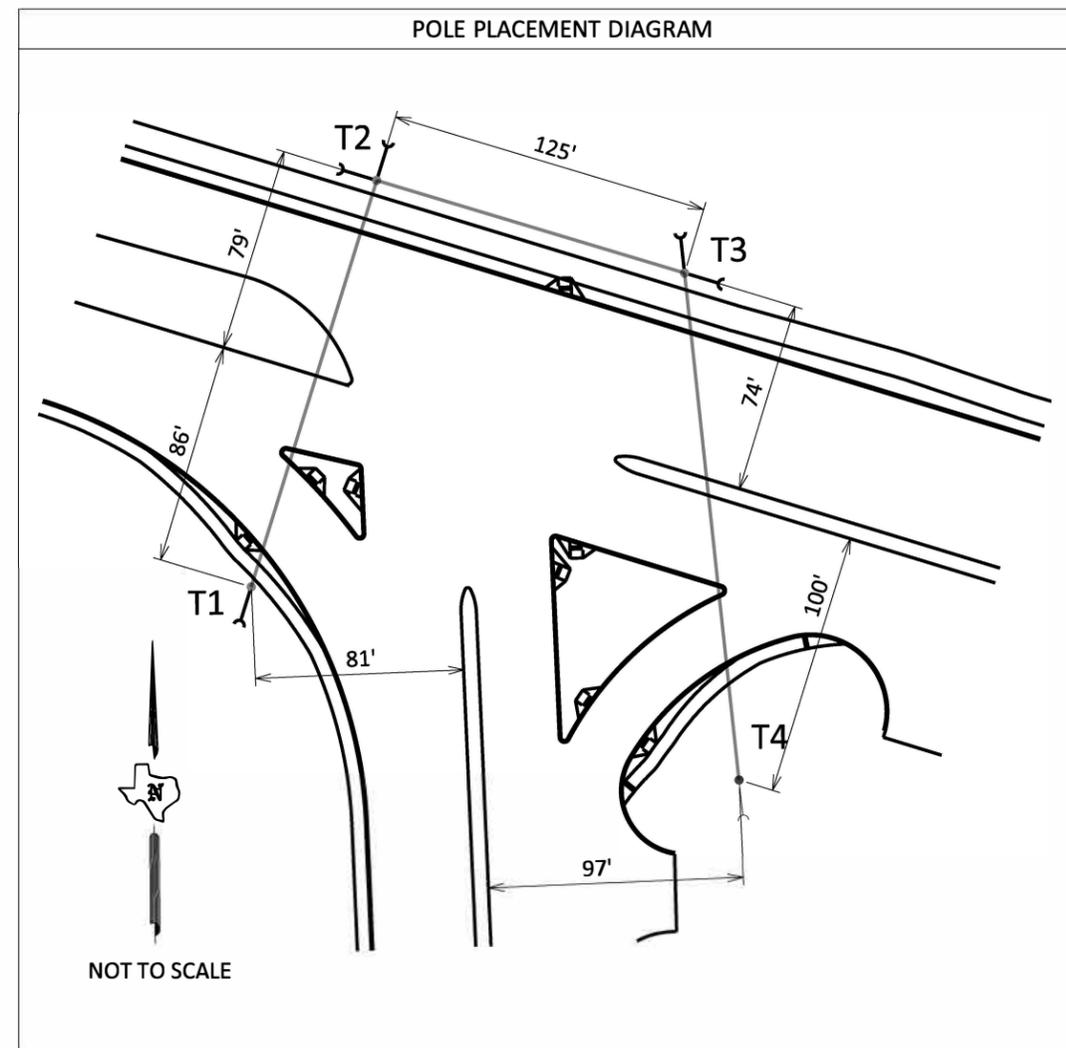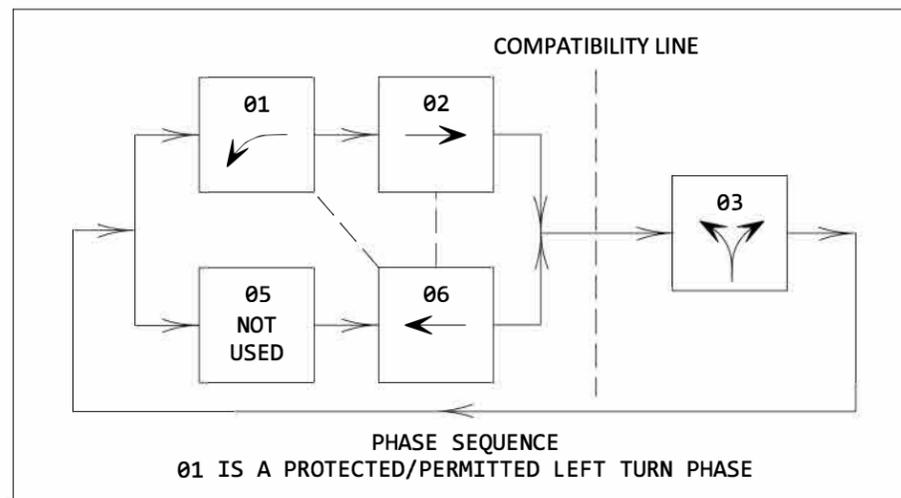

RELOCATE FROM EXISTING SIGNAL

A



R10-12

CITY SUPPLIED

B C D

STREET NAME SIGNS

EXISTING ELECTRICAL SERVICE DATA									
ELECTRICAL SERVICE	SERVICE CONDUIT SIZE (RM)	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	CONTACTOR AMPS	PANELBD./LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	KVA LOAD
TY D (120/240) 070 (NS) SS (E) GC (O)	1-1/4"	3#4	N/A	2P/70	30	100	TEMP SIGNAL LIGHTING	1P/50 2P/15	<7.1



Signature: [Signature] Date: P. E. 9-30-22

Texas Department of Transportation © 2022



PHASE 1 STAGE 2
TEMPORARY TRAFFIC SIGNAL LAYOUT
FM 1378 AT FM 3286

SHEET 3 OF 3

DESIGN AXR	FED. RD. DIV. NO. 6	STATE PROJECT NO. (SEE TITLE SHEET)		HIGHWAY NO. FM 1378, ETC
GRAPHICS AXR	STATE TEXAS	DISTRICT 18	COUNTY COLLIN	SHEET NO. 249
CHECK LDL	CONTROL	SECTION	JOB	
CHECK APM	1392	01	044, ETC	

LEGEND

- PROPOSED WOOD SPAN SIGNAL WITH HEAD NUMBERS AND 250 WATT EQ LED LUMINAIRES
- T1 TEMPORARY SIGNAL POLE NUMBER
- PROPOSED CONDUIT WITH RUN NUMBER
- PROPOSED POLE MOUNTED CONTROLLER CABINET WITH BBU AND EVP
- STREET NAME SIGN
- EXISTING ELECTRICAL SERVICE
- PROPOSED VIVDS CAMERA AND NUMBER
- PHASED WORK ZONE AREA
- WORK ZONE DRUMS
- VIVDS DETECTION ZONE
- OH OVERHEAD ELECTRIC LINE
- R.O.W. RIGHT OF WAY
- OPTICOM
- TRAFFIC FLOW

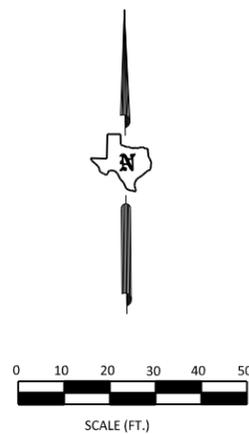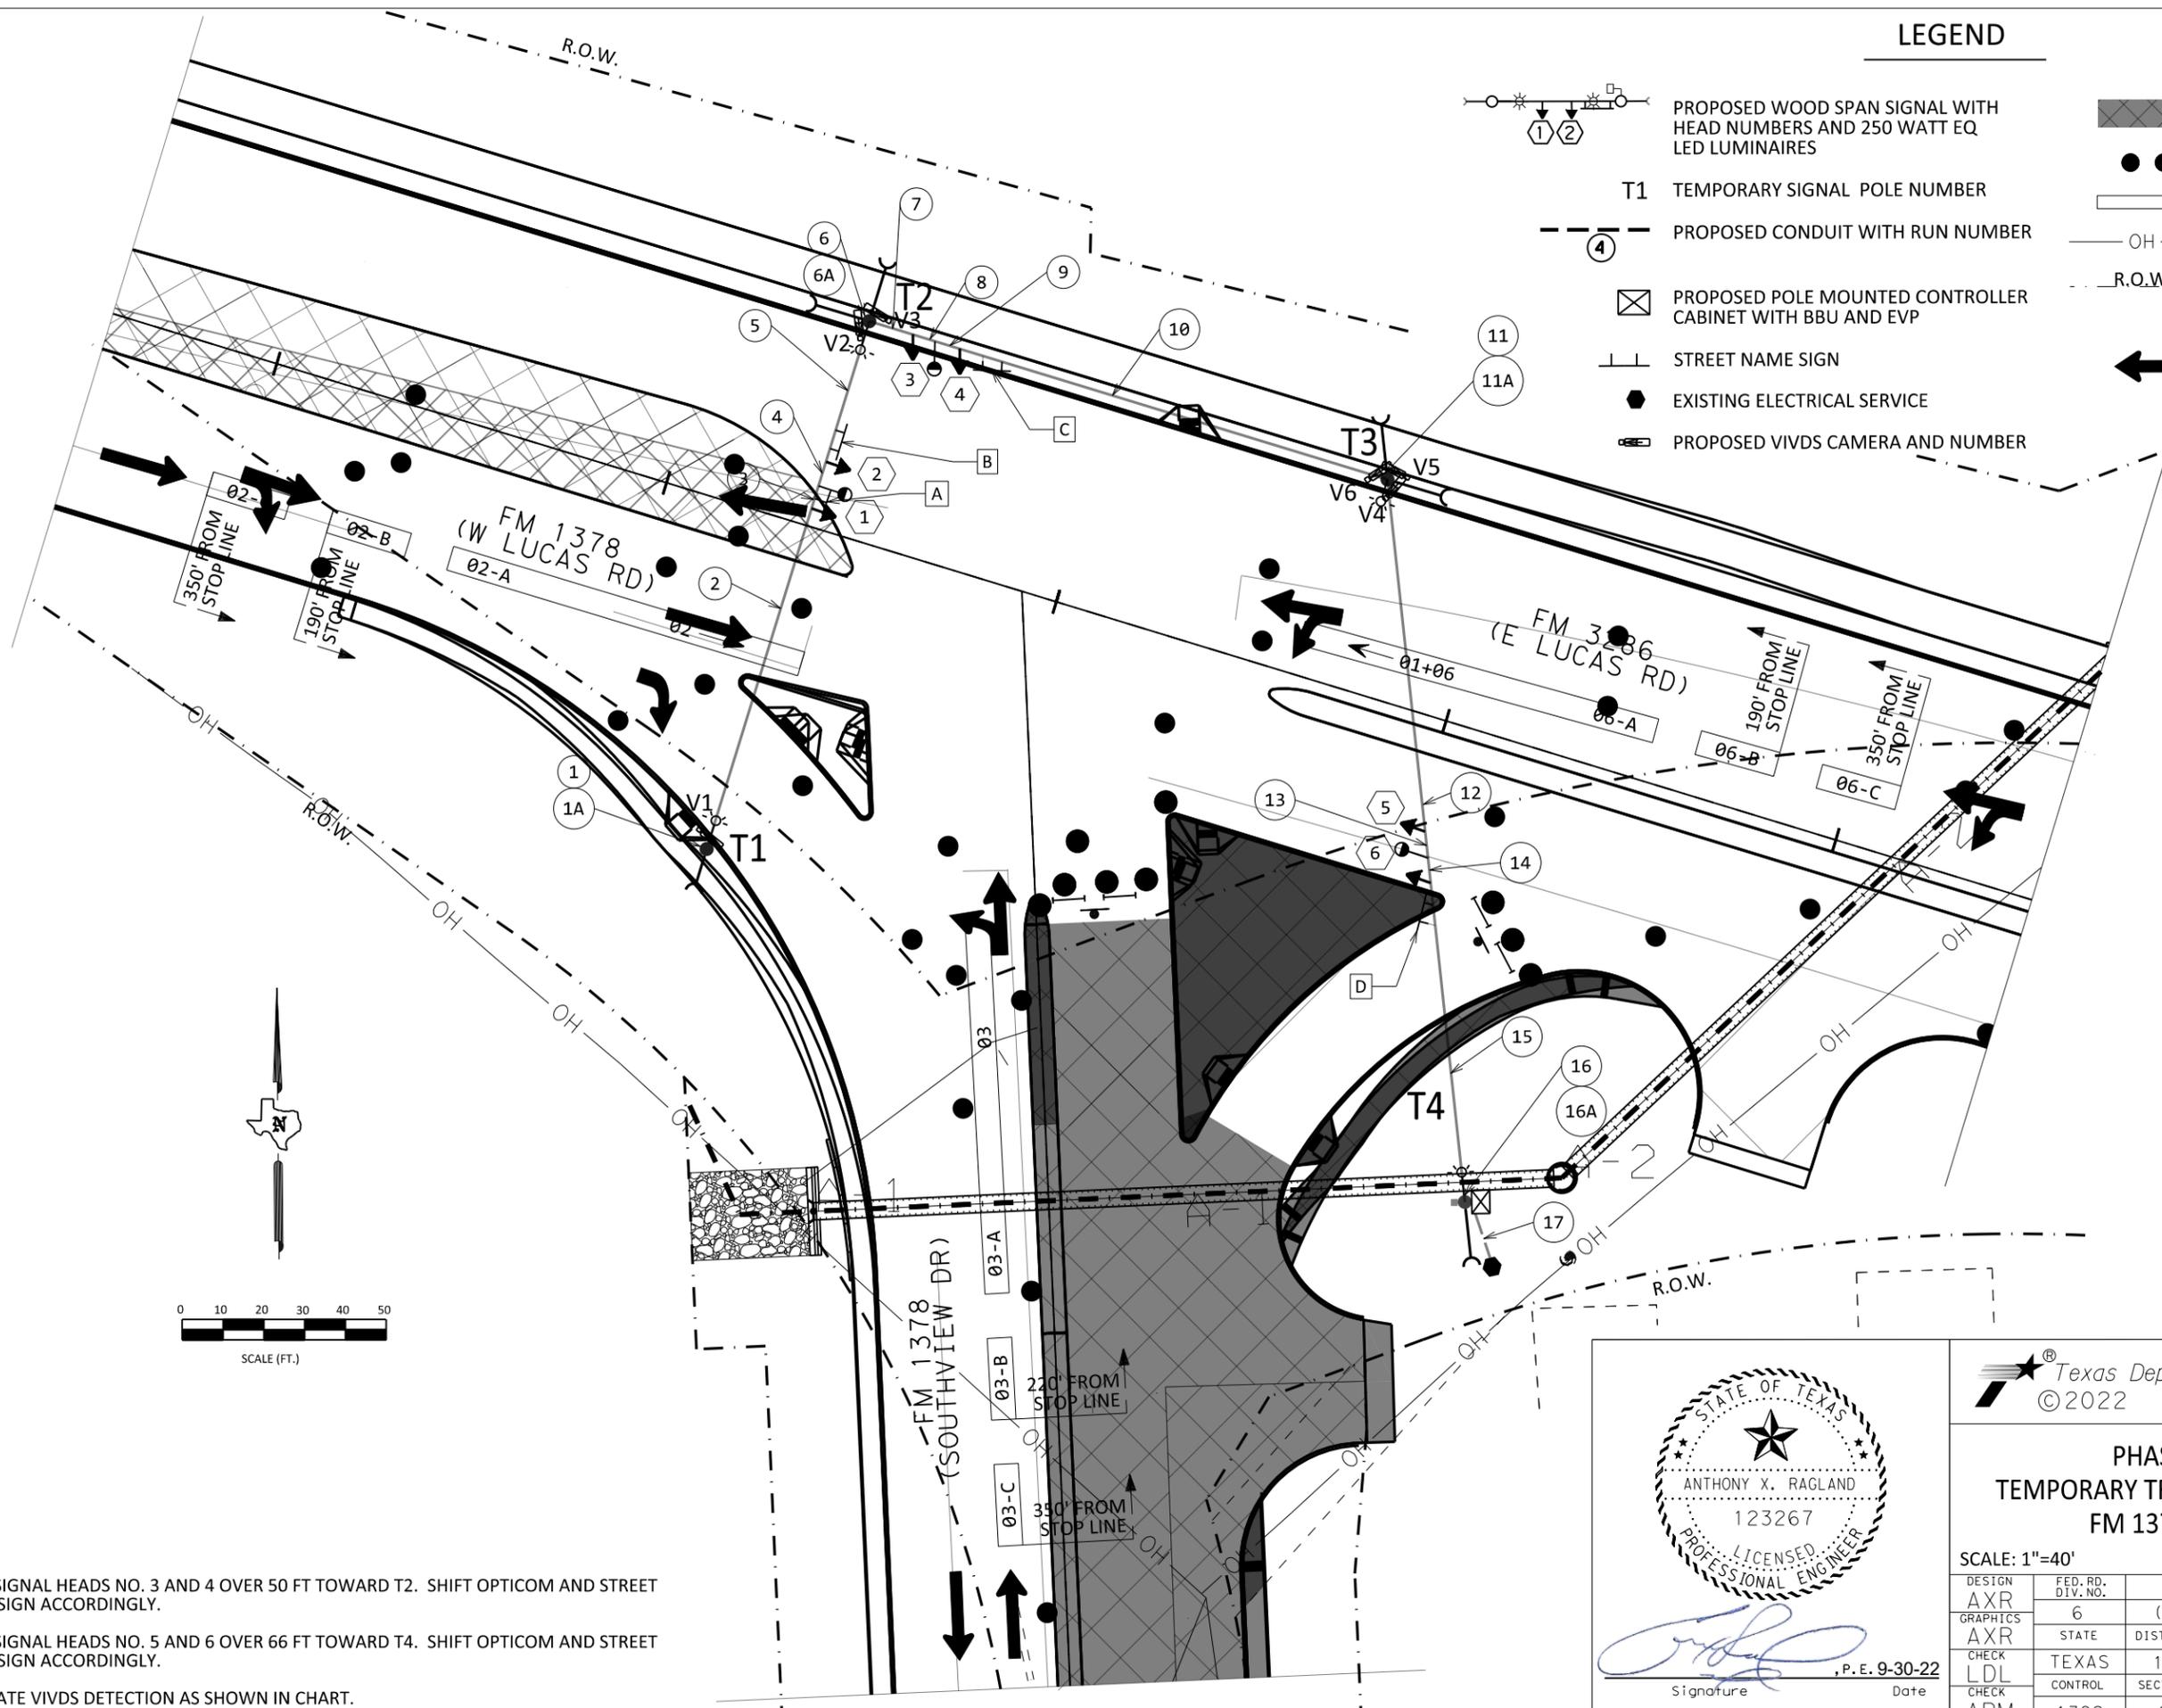

- NOTES:
1. SHIFT SIGNAL HEADS NO. 3 AND 4 OVER 50 FT TOWARD T2. SHIFT OPTICOM AND STREET NAME SIGN ACCORDINGLY.
 2. SHIFT SIGNAL HEADS NO. 5 AND 6 OVER 66 FT TOWARD T4. SHIFT OPTICOM AND STREET NAME SIGN ACCORDINGLY.
 3. RELOCATE VIVDS DETECTION AS SHOWN IN CHART.

ANTHONY X. RAGLAND
 123267
 LICENSED PROFESSIONAL ENGINEER

Signature: *[Signature]* Date: P.E. 9-30-22

©2022

PHASE 2 STAGE 1
TEMPORARY TRAFFIC SIGNAL LAYOUT
FM 1378 AT FM 3286

SCALE: 1"=40' SHEET 1 OF 2

DESIGN AXR	FED. RD. DIV. NO. 6	STATE PROJECT NO. (SEE TITLE SHEET)		HIGHWAY NO. FM 1378, ETC
GRAPHICS AXR	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK LDL	TEXAS	18	COLLIN	250
CHECK APM	CONTROL	SECTION	JOB	
	1392	01	044, ETC	

FILE: BFILES

CONDUIT RUNS													
RUN NO.	CONDUIT TYPE (LF)				CABLE AND WIRE SIZE TYPE (EA)					DETECTION	OPTICOM CABLE *	LENGTH OF RUN (LF)	RUN NO.
	2" RM	4" RM	2" PVC SCH 80 (TRENCH)	OVERHEAD	NO.6 BARE	NO.6 XHHW	NO.8 XHHW	5 CNDR CABLE 14 AWG TY A	7 CNDR CABLE 14 AWG TY A	VIVDS CABLE			
1	20				1		2					20	1
1A	10				1					1		10	1A
2				85			2					85	2
3				6			2		1			6	3
4				6			2		1	1		6	4
5				34			2	1	1		1	34	5
6	20				1		2					20	6
6A	10				1					1		10	6A
7				10			2	1	1	3	1	10	7
8				6			2	2	1	3	1	6	8
9				6			2	2	1	3	2	6	9
10				108			2	2	1	3	2	108	10
11	20				1		2					20	11
11A	10				1					1		10	11A
12				85			2	2	1	6	2	85	12
13				6			2	3	1	6	2	6	13
14				6			2	3	1	6	3	6	14
15				78			2	3	1	6	3	78	15
16	20				1		2					20	16
16A		20			1		4	3	1	6	3	20	16A
17	5		14		1	2	4					19	17
TOTAL LENGTH	115	20	14	436	135	38	1188	784	371	1515	778		TOTAL LENGTH

VIVDS DETECTION ZONES					
VIVDS NUMBER	MOUNTING LOCATION	ZONE LOCATION	MOUNTING HEIGHT (FT)	SETBACK DISTANCE (FT)	ZONE
V1	POLE T1	SETBACKS	30	190	02-B
				350	02-C
V2	POLE T2	SETBACKS	30	220	03-B
				350	03-C
V3	POLE T2	STOPBAR	20	N/A	06-A
V4	POLE T3	STOPBAR	20	N/A	03-A
V5	POLE T3	SETBACKS	30	190	06-B
				350	06-C
V6	POLE T3	STOPBAR	20	N/A	02-A

NOTES:

* CABLE PROVIDED BY THE CITY AND INSTALLED BY THE CONTRACTOR. INSTALLATION PAID FOR UNDER ITEM 681.

** CABLE SUPPLIED AND INSTALLED BY THE CONTRACTOR. INSTALLATION PAID FOR UNDER ITEM 681.

IN RUNS NO. 1,6, 11 AND 16 THE LENGTH OF THE NO. 8 INSULATED CABLE IS MEASURED TO THE END OF THE LUMINAIRE ARM.

FILE: \$FILE\$



Texas Department of Transportation
© 2022




PHASE 2 STAGE 1
TEMPORARY TRAFFIC SIGNAL LAYOUT
FM 1378 AT FM 3286


SCALE: 1"=40'

SHEET 2 OF 2

DESIGN AXR	FED. RD. DIV. NO. 6	STATE PROJECT NO. (SEE TITLE SHEET)		HIGHWAY NO. FM 1378, ETC
GRAPHICS AXR	STATE	DISTRICT 18	COUNTY COLLIN	SHEET NO. 251
CHECK LDL	TEXAS	SECTION CONTROL	JOB 044, ETC	
CHECK APM	1392	01		

LEGEND

-  PROPOSED WOOD SPAN SIGNAL WITH HEAD NUMBERS AND 250 WATT EQ LED LUMINAIRES
-  T1 TEMPORARY SIGNAL POLE NUMBER
-  PROPOSED CONDUIT WITH RUN NUMBER
-  PROPOSED POLE MOUNTED CONTROLLER CABINET WITH BBU AND EVP
-  STREET NAME SIGN
-  EXISTING ELECTRICAL SERVICE
-  V1 PROPOSED VIVDS CAMERA AND NUMBER
-  PHASED WORK ZONE AREA
-  WORK ZONE DRUMS
-  VIVDS DETECTION ZONE
-  OH OVERHEAD ELECTRIC LINE
-  R.O.W. RIGHT OF WAY
-  OPTICOM
-  TRAFFIC FLOW

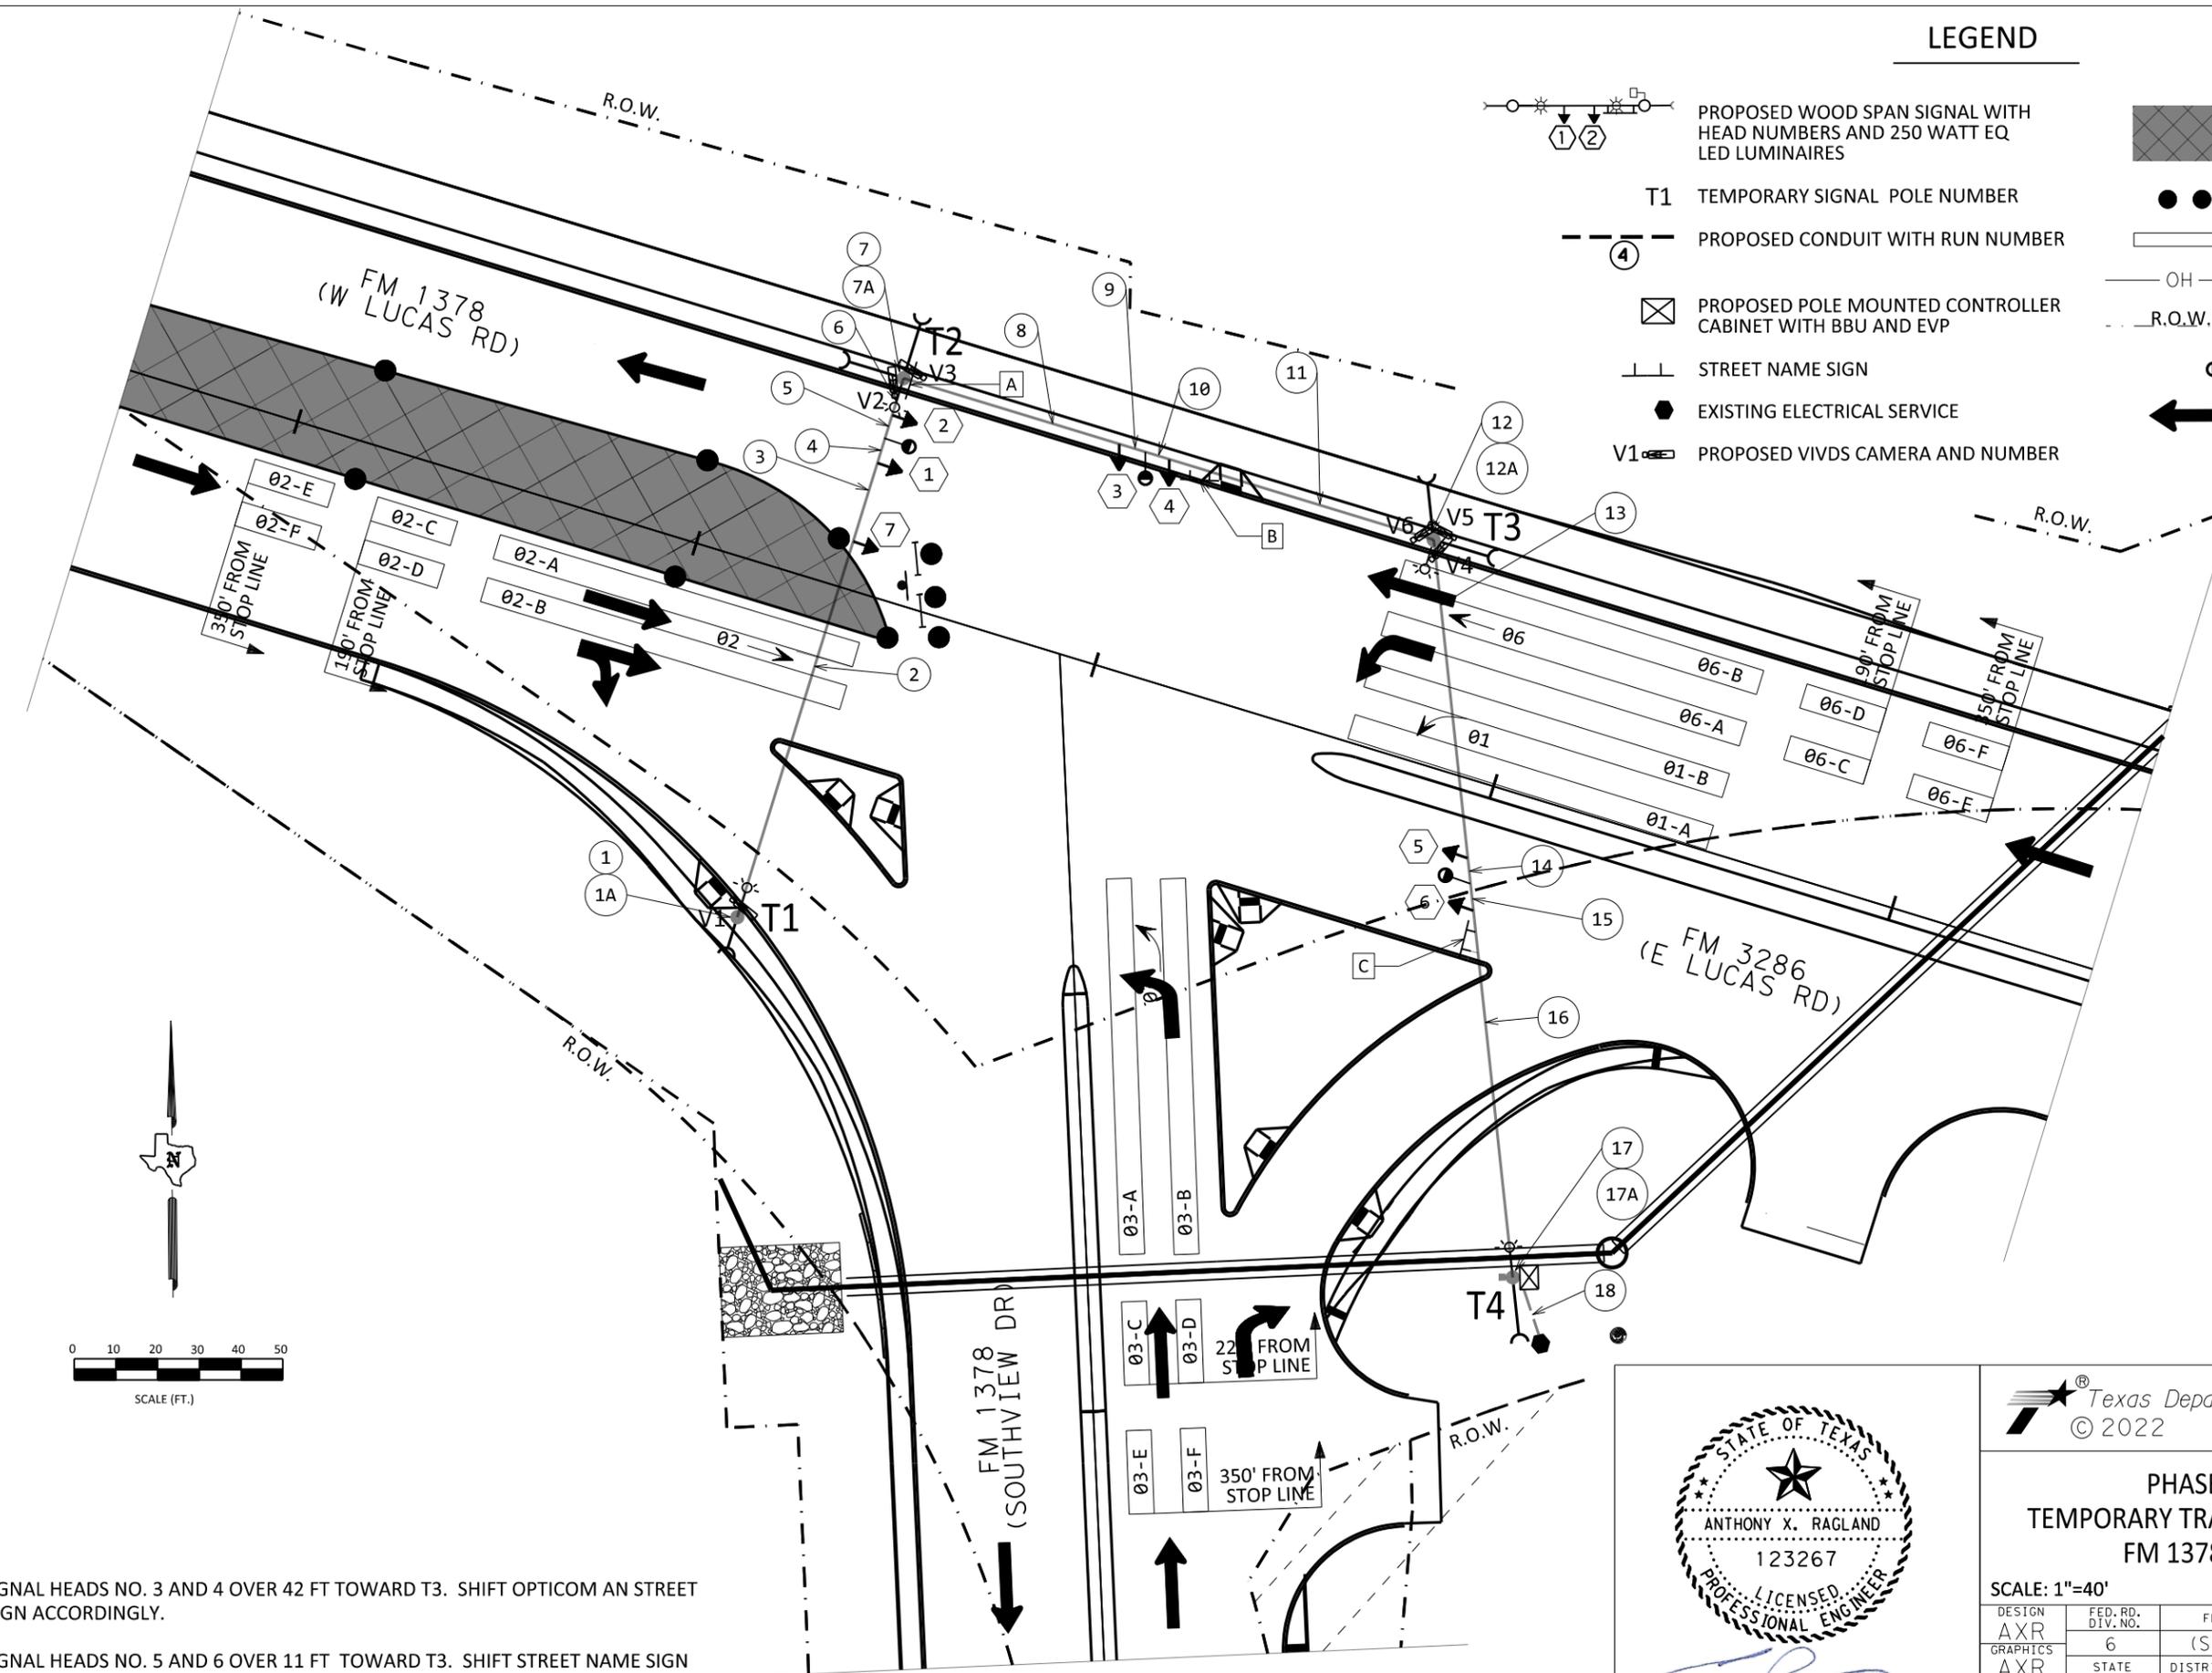

- NOTES:
1. SHIFT SIGNAL HEADS NO. 3 AND 4 OVER 42 FT TOWARD T3. SHIFT OPTICOM AND STREET NAME SIGN ACCORDINGLY.
 2. SHIFT SIGNAL HEADS NO. 5 AND 6 OVER 11 FT TOWARD T3. SHIFT STREET NAME SIGN ACCORDINGLY.
 3. ADD H4PLT SIGNAL HEAD NO. 7. REPLACE H5LT SIGNAL HEAD NO. 1 WITH A H3.



Anthony X. Ragland
 Signature Date P.E. 9-30-22

Texas Department of Transportation
 © 2022




**PHASE 2 STAGE 2
 TEMPORARY TRAFFIC SIGNAL LAYOUT
 FM 1378 AT FM 3286**

SCALE: 1"=40' SHEET 1 OF 2

DESIGN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
AXR	6	(SEE TITLE SHEET)		FM 1378, ETC.
GRAPHICS	STATE	DISTRICT	COUNTY	SHEET NO.
AXR	TEXAS	01	COLLIN	252
CHECK	CONTROL	SECTION	JOB	
LDL	1392	01	044, ETC.	


CONDUIT RUNS													
RUN NO.	CONDUIT TYPE (LF)				CABLE AND WIRE SIZE TYPE (EA)					DETECTION	OPTICOM CABLE *	LENGTH OF RUN (LF)	RUN NO.
	2" RM	4" RM	2" PVC SCH 80 (TRENCH)	OVERHEAD	NO.6 BARE	NO.6 XHHW	NO.8 XHHW	5 CNDR CABLE 14 AWG TY A	7 CNDR CABLE 14 AWG TY A	VIVDS CABLE			
1	20				1		2					20	1
1A	10				1					1		10	1A
2				92			2		1	1		92	2
3				20			2		1	1		20	3
4				6			2	1	1	1		6	4
5				6			2	1	1	1	1	6	5
6				8			2	1	1	1	1	8	6
7	20				1		2					20	7
7A	10				1					1		10	7A
8				52			2	1	1	3	1	52	8
9				6			2	2	1	3	1	6	9
10				6			2	2	1	3	2	6	10
11				65			2	2	1	3	2	65	11
12	20				1		2					20	12
12A	10				1					1		10	12A
13				75			2	2	1	6	2	75	13
14				6			2	3	1	6	2	6	14
15				6			2	3	1	6	3	6	15
16				87			2	3	1	6	3	87	16
17	20				1		2					20	17
17A		20			1		4	3	1	6	3	20	17A
18	5		14		1	2	4					19	18
TOTAL LENGTH	120	20	49	455	135	108	1366	698	376	1344	680		TOTAL LENGTH

SIGNAL HEADS									
SIGNAL HEAD NUMBER	SIGNAL HEAD TYPE	12" SIGNAL INDICATION							
		BACK PLATE		VEH SIGNAL SECT WITH LED LAMP					
		3-SEC (EA)	4-SEC (EA)	←G (EA)	G (EA)	←Y (EA)	Y (EA)	←R (EA)	R (EA)
1,2,3,4,5,6	H3	6			6		6		6
7	H4PLT		1	1		1		2	
TOTAL		6	1	1	6	1	6	2	6

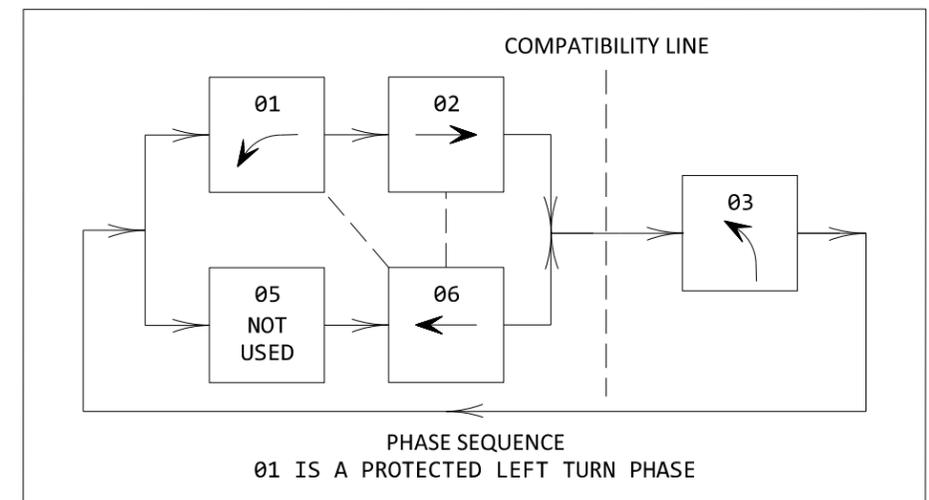

VIVDS DETECTION ZONES					
VIVDS NUMBER	MOUNTING LOCATION	ZONE LOCATION	MOUNTING HEIGHT (FT)	SETBACK DISTANCE (FT)	ZONE
V1	POLE T1	SETBACKS	30	190	02-B
				350	02-C
V2	POLE T2	SETBACKS	30	220	03-B
				350	03-C
V3	POLE T2	STOPBAR	20	N/A	06-A
V4	POLE T3	STOPBAR	20	N/A	03-A
V5	POLE T3	SETBACKS	30	190	06-B
				350	06-C
V6	POLE T3	STOPBAR	20	N/A	02-A

CABLE TERMINATION CHART				
CNDR COLOR	CABLE 1 & 2 SPAN T1-T2 CONTROLLER		CABLE 3 SPAN T2-T3 CONTROLLER	CABLE 4 SPAN T3-T4 CONTROLLER
	7 CNDR	5 CNDR	5 CNDR	5 CNDR
BLACK	SPARE	SPARE	SPARE	SPARE
WHITE	SIG. COMMON	SIG. COMMON	SIG. COMMON	SIG. COMMON
RED	SH 7 01 ←	SH 1,2 06 R	SH 3,4 03 R	SH 5,6 02 R
GREEN	SH 7 01 ←	SH 1,2 06 G	SH 3,4 03 G	SH 5,6 02 G
ORANGE	SH 7 01 ←	SH 1,2 06 Y	SH 3,4 03 Y	SH 5,6 02 Y
BLUE	SPARE			
WHITE/BLACK	SPARE			



Signature: *[Signature]* Date: P.E. 9-30-22






PHASE 2 STAGE 2
TEMPORARY TRAFFIC SIGNAL LAYOUT
FM 1378 AT FM 3286

SHEET 2 OF 2

DESIGN AXR	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. (SEE TITLE SHEET)		HIGHWAY NO. FM 1378, ETC.
GRAPHICS AXR	STATE	DISTRICT 01	COUNTY COLLIN	SHEET NO.
CHECK LDL	TEXAS	SECTION	JOB	253
CHECK APM	CONTROL 1392	01	044, ETC.	

LEGEND

- ROW RIGHT OF WAY
- OE OVERHEAD ELECTRIC
- POWER POLE
- MAST ARM SIGN
- ELECTRICAL SERVICE
- SIGN DESIGNATION
- TEMPORARY SIGNAL
- PED POLE WITH PED HEADS
- MAST ARM SIGNAL WITH HEAD NUMBERS AND 250 WATT EQ LED LUMINAIRE
- P1 SIGNAL POLE NUMBER
- GROUND BOX (TY D)
- CONDUIT WITH RUN NUMBER
- OPTICOM
- CONTROLLER CABINET

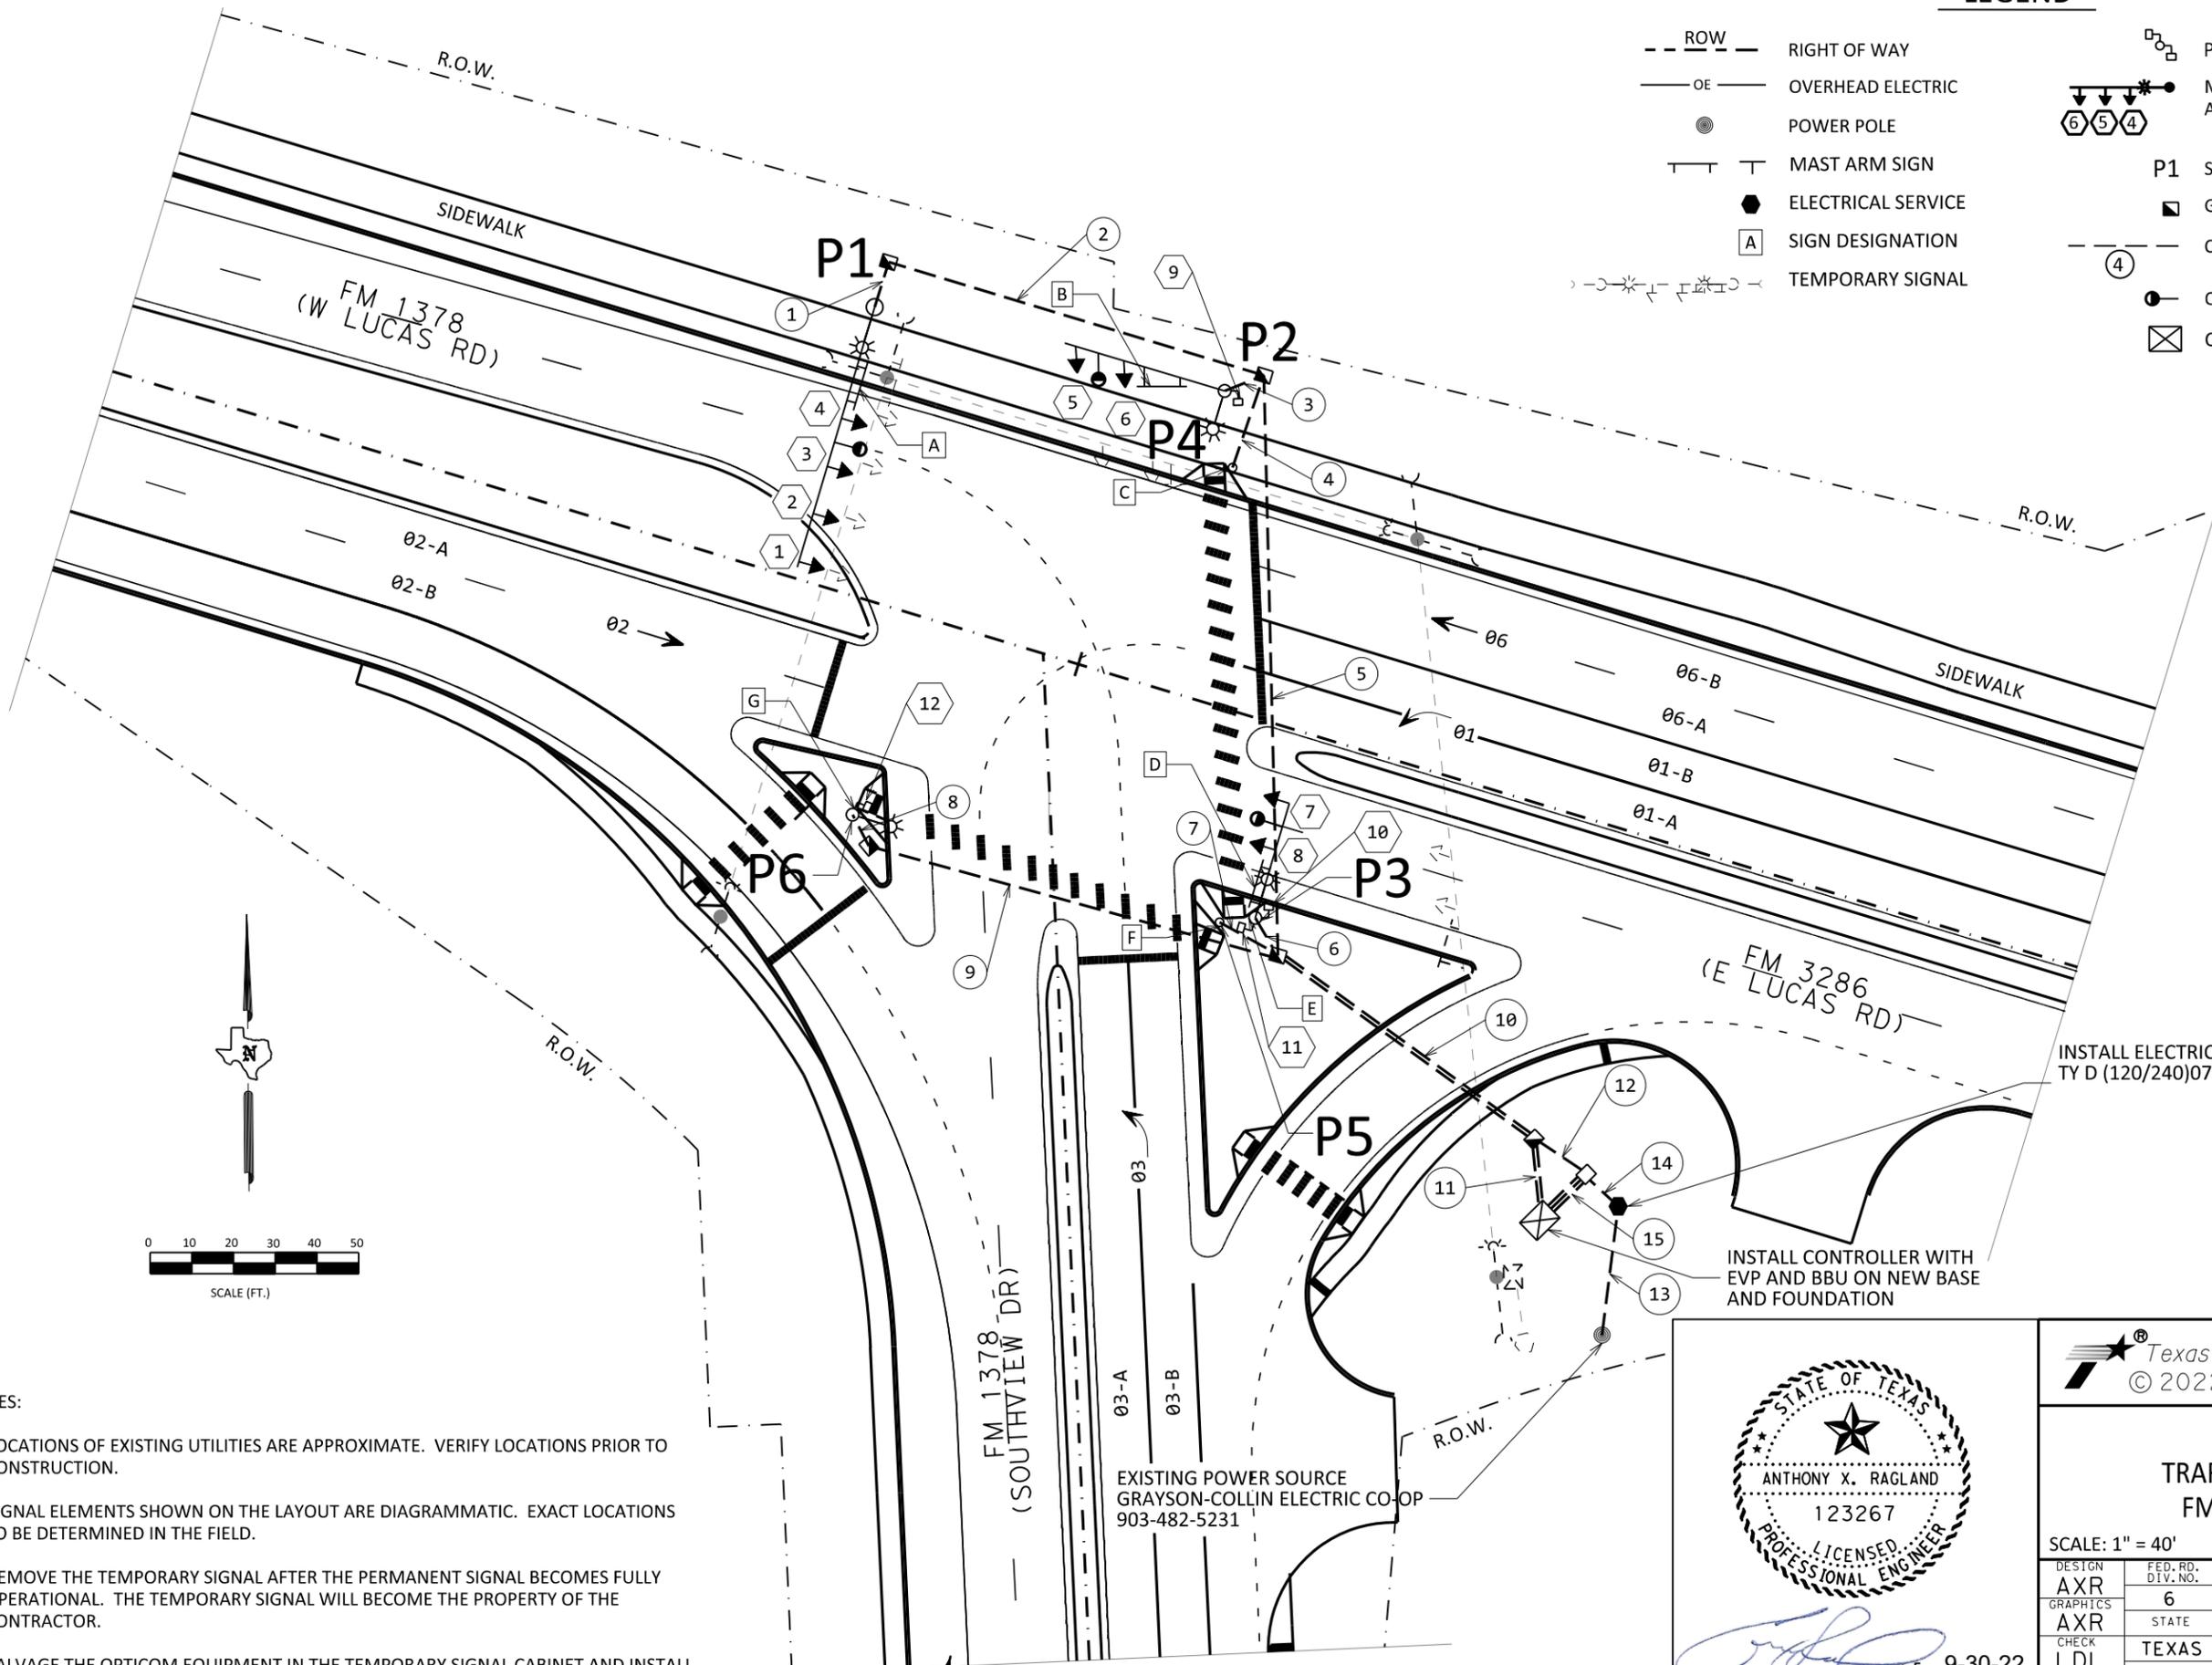

- NOTES:
1. LOCATIONS OF EXISTING UTILITIES ARE APPROXIMATE. VERIFY LOCATIONS PRIOR TO CONSTRUCTION.
 2. SIGNAL ELEMENTS SHOWN ON THE LAYOUT ARE DIAGRAMMATIC. EXACT LOCATIONS TO BE DETERMINED IN THE FIELD.
 3. REMOVE THE TEMPORARY SIGNAL AFTER THE PERMANENT SIGNAL BECOMES FULLY OPERATIONAL. THE TEMPORARY SIGNAL WILL BECOME THE PROPERTY OF THE CONTRACTOR.
 4. SALVAGE THE OPTICOM EQUIPMENT IN THE TEMPORARY SIGNAL CABINET AND INSTALL IN THE PERMANENT SIGNAL CABINET.

EXISTING POWER SOURCE
GRAYSON-COLLIN ELECTRIC CO-OP
903-482-5231



Anthony X. Ragland
Signature
P.E. 9-30-22
Date



**PERMANENT
TRAFFIC SIGNAL LAYOUT
FM 1378 AT FM 3286**



SCALE: 1" = 40' SHEET 1 OF 5

DESIGN AXR	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. (SEE TITLE SHEET)		HIGHWAY NO. FM 1378, ETC.
GRAPHICS AXR	STATE TEXAS	DISTRICT 18	COUNTY COLLIN	SHEET NO. 254
CHECK LDL	CONTROL	SECTION	JOB	
CHECK APM	1392	01	044, ETC.	

LEGEND

- T1 TEMPORARY POLE NUMBER
- P1 PROPOSED POLE NUMBER
- ④ CONDUIT RUN WITH NUMBER
- R.O.W.--- RIGHT OF WAY
- ⊙ ⊞ PROPOSED FLASHER ASSEMBLY
- ⊙ ⊞ EXISTING SIGN ASSEMBLY

P7 ROADSIDE FLASHING BEACON AND SOLAR ASSEMBLY NOT TO SCALE

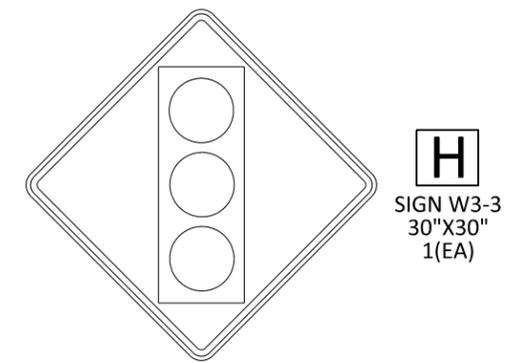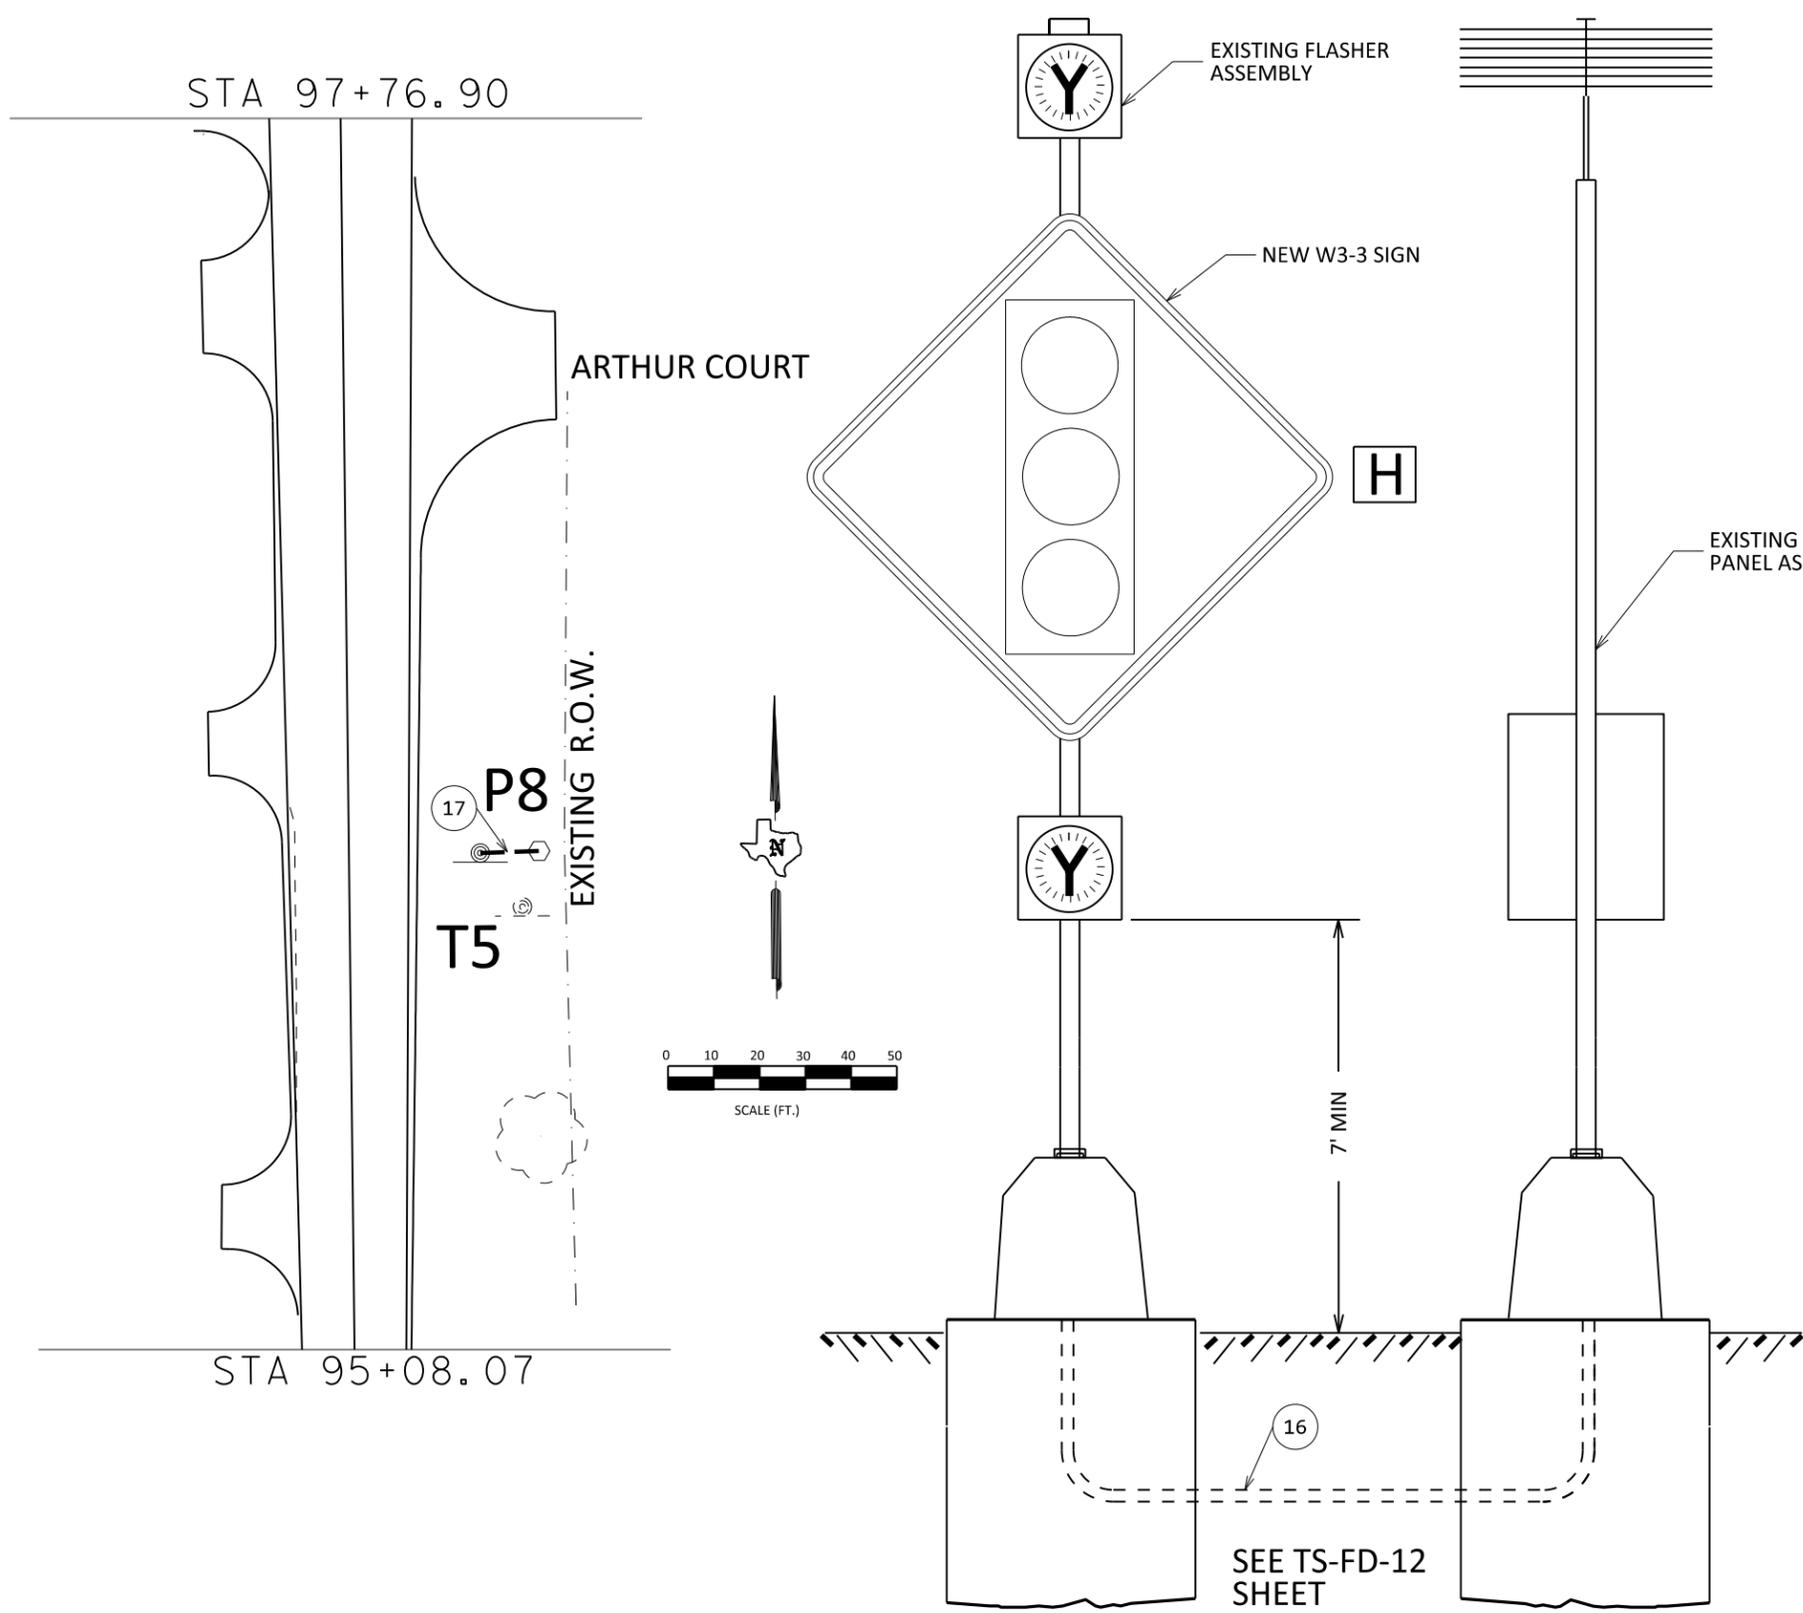

PROPOSED FLASHER POLE				
POLE NO.	STATION	OFFSET (FT)	FOUNDATION	
			TYPE	DEPTH (FT)
P7	96+16.53	R 28	24-A	6

OFFSET DISTANCE TO FLASHER MEASURED FROM THE CENTERLINE OF FM 1378.

NOTES:

1. SIGNAL ELEMENTS SHOWN ON THE LAYOUT ARE DIAGRAMMATIC. EXACT LOCATIONS TO BE DETERMINED IN THE FIELD.
2. REMOVE THE TEMPORARY STATIC SIGN ASSEMBLY. THE TEMPORARY SIGN SHALL BECOME THE PROPERTY OF THE CONTRACTOR.
3. INSTALL NEW FLASHER AND SOLAR FOUNDATIONS. INSTALL SALVAGED FLASHER AND SOLAR PANEL ASSEMBLIES WITH NEW W3-3 SIGN.



Corrine Chandler, P.E. 2/28/23
 Signature Date

© 2022
PERMANENT TRAFFIC SIGNAL LAYOUT
FM 1378 AT FM 3286
 SCALE: 1" = 40' SHEET 2 OF 5

DESIGN AXR	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. (SEE TITLE SHEET)	HIGHWAY NO. FM 1378, ETC.
GRAPHICS AXR	STATE TEXAS	DISTRICT 18	COUNTY COLLIN
CHECK LDL	CONTROL	SECTION	JOB
CHECK APM	1392	01	044, ETC.

255

FILE:

CONDUIT RUNS																	
RUN NO.	CONDUIT TYPE (LF)				CABLE AND WIRE SIZE AND TYPE (EA)								RADAR (EA)		OPTICOM CABLE ***	LENGTH OF RUN (LF)	RUN NO.
	(ITEM 618)				(ITEM 620)				(ITEM 684)			(ITEM 6292)					
	2" PVC SCH 40 (TRENCH)	2" PVC SCH 80 (TRENCH)	3" PVC SCH 40 (TRENCH)	3" PVC SCH 40 (BORE)	XX XXX #	NO.6 BARE	NO.6 INSULATED	NO.8 INSULATED	NO.12 INSULATED	2 CNDR CABLE 12 AWG (APS)	7 CNDR CABLE 14 AWG (PED)	10 CNDR CABLE 14 AWG (SIGNAL)	PRESENCE RADAR CABLE *	ADVANCE RADAR CABLE *			
1			11			1		2				1			1	11	1
2			94			1		2				1			1	94	2
3			10			1		2				1			1	10	3
4	23					1				1	1					23	4
5				139		1		2		1	1	2			2	139	5
6			11			1		2		1		1			1	11	6
7	16					1				1						16	7
8	9					1		2		1	1					9	9
9				102		1		2		1	1					102	10
10				2@76		2		4		4	3	3			3	76	11
11			2@20			2				4	3	3			3	20	12
12	15					1		4								15	13
13		31			3											31	14
14	11					1	2	4								11	15
**15	10		2@10			1	2									10	**16
16	13								4							13	17
TOTAL (LF)	97	31	206	393		655	42	1166	52	684	561	692			692		TOTAL (LF)

NOTES:

* ALL RADAR CABLE IS SUBSIDIARY TO ITEM 6292. COLUMN TO BE FILLED IN AT TIME OF INSTALLATION.

** SPARE CONDUITS AS REQUIRED ON TS-CF-04.

*** CABLE SUPPLIED BY THE CITY AND INSTALLED BY THE CONTRACTOR.

SUPPLIED AND INSTALLED BY GRAYSON-COLLIN ELECTRIC CO-OP.

FILE: \$FILES




 Signature _____ Date 9-30-22		 Texas Department of Transportation © 2022			
		PERMANENT TRAFFIC SIGNAL LAYOUT FM 1378 AT FM 3286 SHEET 3 OF 5			
DESIGN AXR	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. (SEE TITLE SHEET)		HIGHWAY NO. FM 1378, ETC.	
GRAPHICS AXR	STATE TEXAS	DISTRICT 18	COUNTY COLLIN	SHEET NO. 256	
CHECK L DL	CONTROL	SECTION	JOB		
CHECK APM	1392	01	044, ETC.		

SIGNAL HEAD AND POLE PLACEMENT																								
POLE NO.	24" DIA TYPE-A	(ITEM 416) FND SUMMARY (LF)	(ITEM 416) FND SUMMARY WIND ZONE 80 MPH (LF)			WIRE INSIDE POLE (LF)										DIMENSIONS (LF)								
						(ITEM 620) LUMINAIRES	(ITEM 684) SIG. CABLE TYPE-A (SIGNAL)	(ITEM 684) SIG. CABLE TYPE-A (PED)	(ITEM 684) SIG. CABLE TYPE-C (APS)	(ITEM 6292) RADAR		OPTICOM CABLE ***	NO. OF SIGNAL HEADS (EA)	NO. OF PED HEADS (EA)	NO. OF APS (EA)					LUM (EA)				
																					NO. 12 INSULATED	5 CNDR 14 AWG	5 CNDR 14 AWG	2 CNDR 12 AWG
A	B	C	D	E	F	G	H																	
P1					22	80	260					53	4			1	19	28	12	12	12	65	19	30
P2				13		80	100					51	2	1		1		25	12			40	19	30
P3			11			80	84	10	5			42	2	2	1	1	5	17	12			28	19	30
**P4	4								5															
**P5	4								5															
P6		8													1									
*P7	2@6					20																		
TOTAL	20	8	11	13	22	260	444	10	20			146	8	5	4	4								



ALL RADAR CABLE SUBSIDIARY TO ITEM 6292. COLUMNS TO BE FILLED IN AT TIME OF INSTALLATION
 * SUBSIDIARY TO ITEM 685
 ** SUBSIDIARY TO ITEM 687
 *** CABLE AND EQUIPMENT PROVIDED BY THE CITY AND INSTALLED BY THE CONTRACTOR. PAYMENT SUBSIDIARY TO ITEM 680
 EX = EXISTING

SIGNAL HEADS									
SIGNAL HEAD NUMBER	SIGNAL HEAD TYPE	(ITEM 682) 12" SIGNAL INDICATION							LED COUNTDOWN PED SIGNAL (EA)
		BACK PLATE	VEHICLE SIG SEC W/LED LAMP						
			3-SEC (EA)	<G (EA)	G (EA)	<Y (EA)	Y (EA)	<R (EA)	
3,4,7,8	H3	4		4		4		4	
1,2,5,6	H3LT	4	4		4		4		
9,10,11,12	152A								4
TOTAL		8	4	4	4	4	4	4	4

GROUND BOX SUMMARY		
DESCRIPTION	UNIT	QTY.
TYPE A (122311) W/ APRON	EA	1
TYPE C (162911) W/ APRON	EA	5

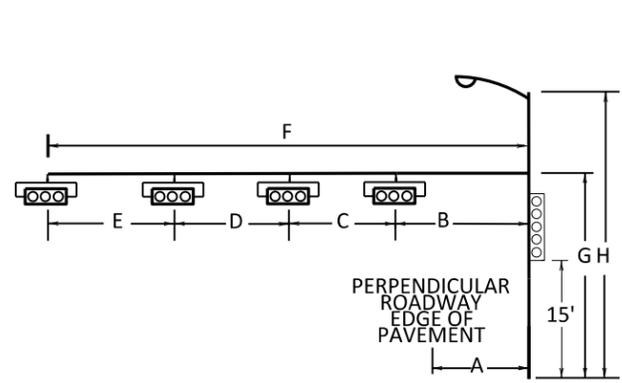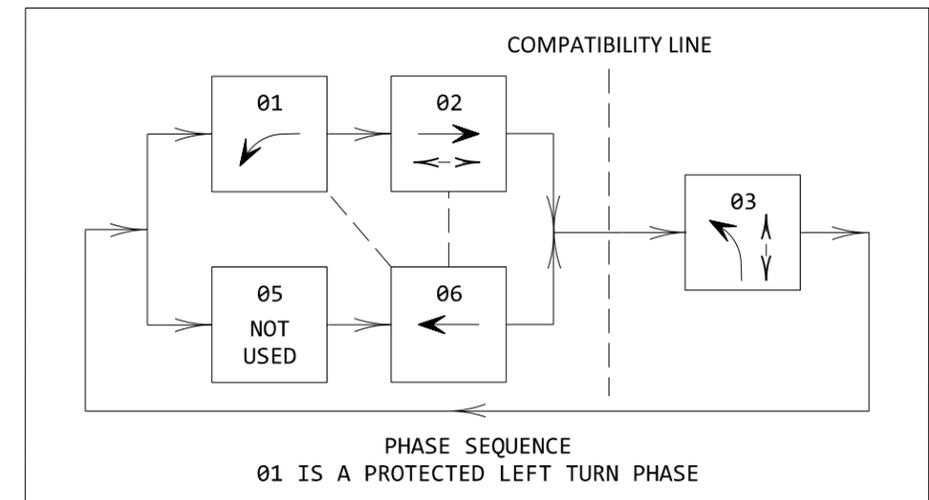

A B D
STREET NAME SIGNS PROVIDED BY CITY OF LUCAS



STATE OF TEXAS
 ANTHONY X. RAGLAND
 123267
 LICENSED PROFESSIONAL ENGINEER
 Signature Date 9-30-22

Texas Department of Transportation
 ©2022

PERMANENT TRAFFIC SIGNAL LAYOUT
 FM 1378 AT FM 3286

SHEET 4 OF 5

DESIGN	FED. RD. DIV. NO.	STATE PROJECT NO.		HIGHWAY NO.
AXR	6	(SEE TITLE SHEET)		FM 1378, ETC.
GRAPHICS	STATE	DISTRICT	COUNTY	SHEET NO.
AXR	TEXAS	18	COLLIN	
CHECK	CONTROL	SECTION	JOB	
LDL	1392	01	044, ETC.	257

FILE: \$FILES\$

PROPOSED ELECTRICAL SERVICE DATA									
ELECTRICAL SERVICE SEE ED (5)-14	SERVICE CONDUIT SIZE	SERVICE CONDUCTORS NO./SIZE	SAFETY SWITCH AMPS	MAIN DISCONNECT CKT. BRK. POLE/AMP	CONTACTOR AMPS	PANELBD./ LOADCENTER AMP RATING (MIN)	CIRCUIT NO.	BRANCH CKT. BRK. POLE/AMPS	KVA LOAD
TY D (120/240)070(NS)SS(E)PS(U)	1-1/4"	3-#4	N/A	2P/70	4P/30	100	T.S. LIGHTING	1P/50 2P/15	<7.1

CABLE TERMINATION CHART				
CNDR COLOR	CABLE 1 FROM P1 TO CONTROLLER 10 CNDR	CABLE 2 FROM P2 TO CONTROLLER 10 CNDR	CABLE 3 FROM P3 TO CONTROLLER 10 CNDR	CABLE 4 FROM P7 TO CONTROLLER 7 CNDR
BLACK	SPARE	SPARE	SPARE	SPARE
WHITE	SIG. COMMON	SIG. COMMON	SIG. COMMON	SIG COMMON
RED	SH 3,4 06 R	SH 5,6 03 R	SH 7,8 02 R	SH 12 02 DW
GREEN	SH 3,4 06 G	SH 5,6 03 G	SH 7,8 02 G	SH 12 02 W
ORANGE	SH 3,4 06 Y	SH 5,6 03 Y	SH 7,8 02 Y	SPARE
BLUE	SH 1,2 01 R	SPARE	SH 10 03 DW	SPARE
WHITE/BLACK	SH 1,2 01 B	SPARE	SH 10 03 W	SPARE
RED/BLACK	SH 1,2 01 R	SPARE	SPARE	
GREEN/BLACK	SPARE	SH 9 03 DW	SH 11 02 DW	
ORANGE/BLACK	SPARE	SH 9 03 W	SH 11 02 W	

DETECTION ZONE DETAILS		
PHASE OF DETECTION	TYPE OF DETECTION	ADVANCE DETECTION ZONE LOCATIONS
01 & 06	PRESENCE AND ADVANCE	360' AND 245' FROM THE STOPBAR
02	PRESENCE AND ADVANCE	360' AND 245' FROM THE STOPBAR
03	PRESENCE AND ADVANCE	445' AND 325' FROM THE STOPBAR

APS MESSAGE CHART			
POLE LOCATION	PEDESTRIAN MOVEMENT	FUNCTIONS	SPEECH MESSAGE/SOUND DETAILS
P3	03	BUTTON PUSH ON DW	WAIT.
		EXTENDED BUTTON PUSH	WAIT TO CROSS E. LUCAS RD AT SOUTHVIEW DR.
		LOCATOR TONE	SLOW TICK
		WALK INDICATION*	RAPID TICK.
P4	03	BUTTON PUSH ON DW	WAIT.
		EXTENDED BUTTON PUSH	WAIT TO CROSS E. LUCAS RD.
		LOCATOR TONE	SLOW TICK
		WALK INDICATION*	RAPID TICK.
P5	02	BUTTON PUSH ON DW	WAIT.
		EXTENDED BUTTON PUSH	WAIT TO CROSS SOUTHVIEW DR AT E. LUCAS RD.
		LOCATOR TONE	SLOW TICK
		WALK INDICATION*	RAPID TICK.
P6	02	BUTTON PUSH ON DW	WAIT.
		EXTENDED BUTTON PUSH	WAIT TO CROSS SOUTHVIEW DR AT W. LUCAS RD.
		LOCATOR TONE	SLOW TICK
		WALK INDICATION*	RAPID TICK.


*COUNTDOWN SPEECH MESSAGE * "OFF" FOR ALL UNITS

FILE:

 Signature _____ Date 9-30-22	 Texas Department of Transportation © 2022			
	PERMANENT TRAFFIC SIGNAL LAYOUT FM 1378 AT FM 3286 SHEET 5 OF 5			
DESIGN AXR	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. (SEE TITLE SHEET)		HIGHWAY NO. FM 1378, ETC.
GRAPHICS AXR	STATE	DISTRICT 18	COUNTY COLLIN	SHEET NO. 258
CHECK LDL	TEXAS	SECTION 01	JOB 044, ETC.	
CHECK APM	1392			

\$DATE\$

\$FILE\$

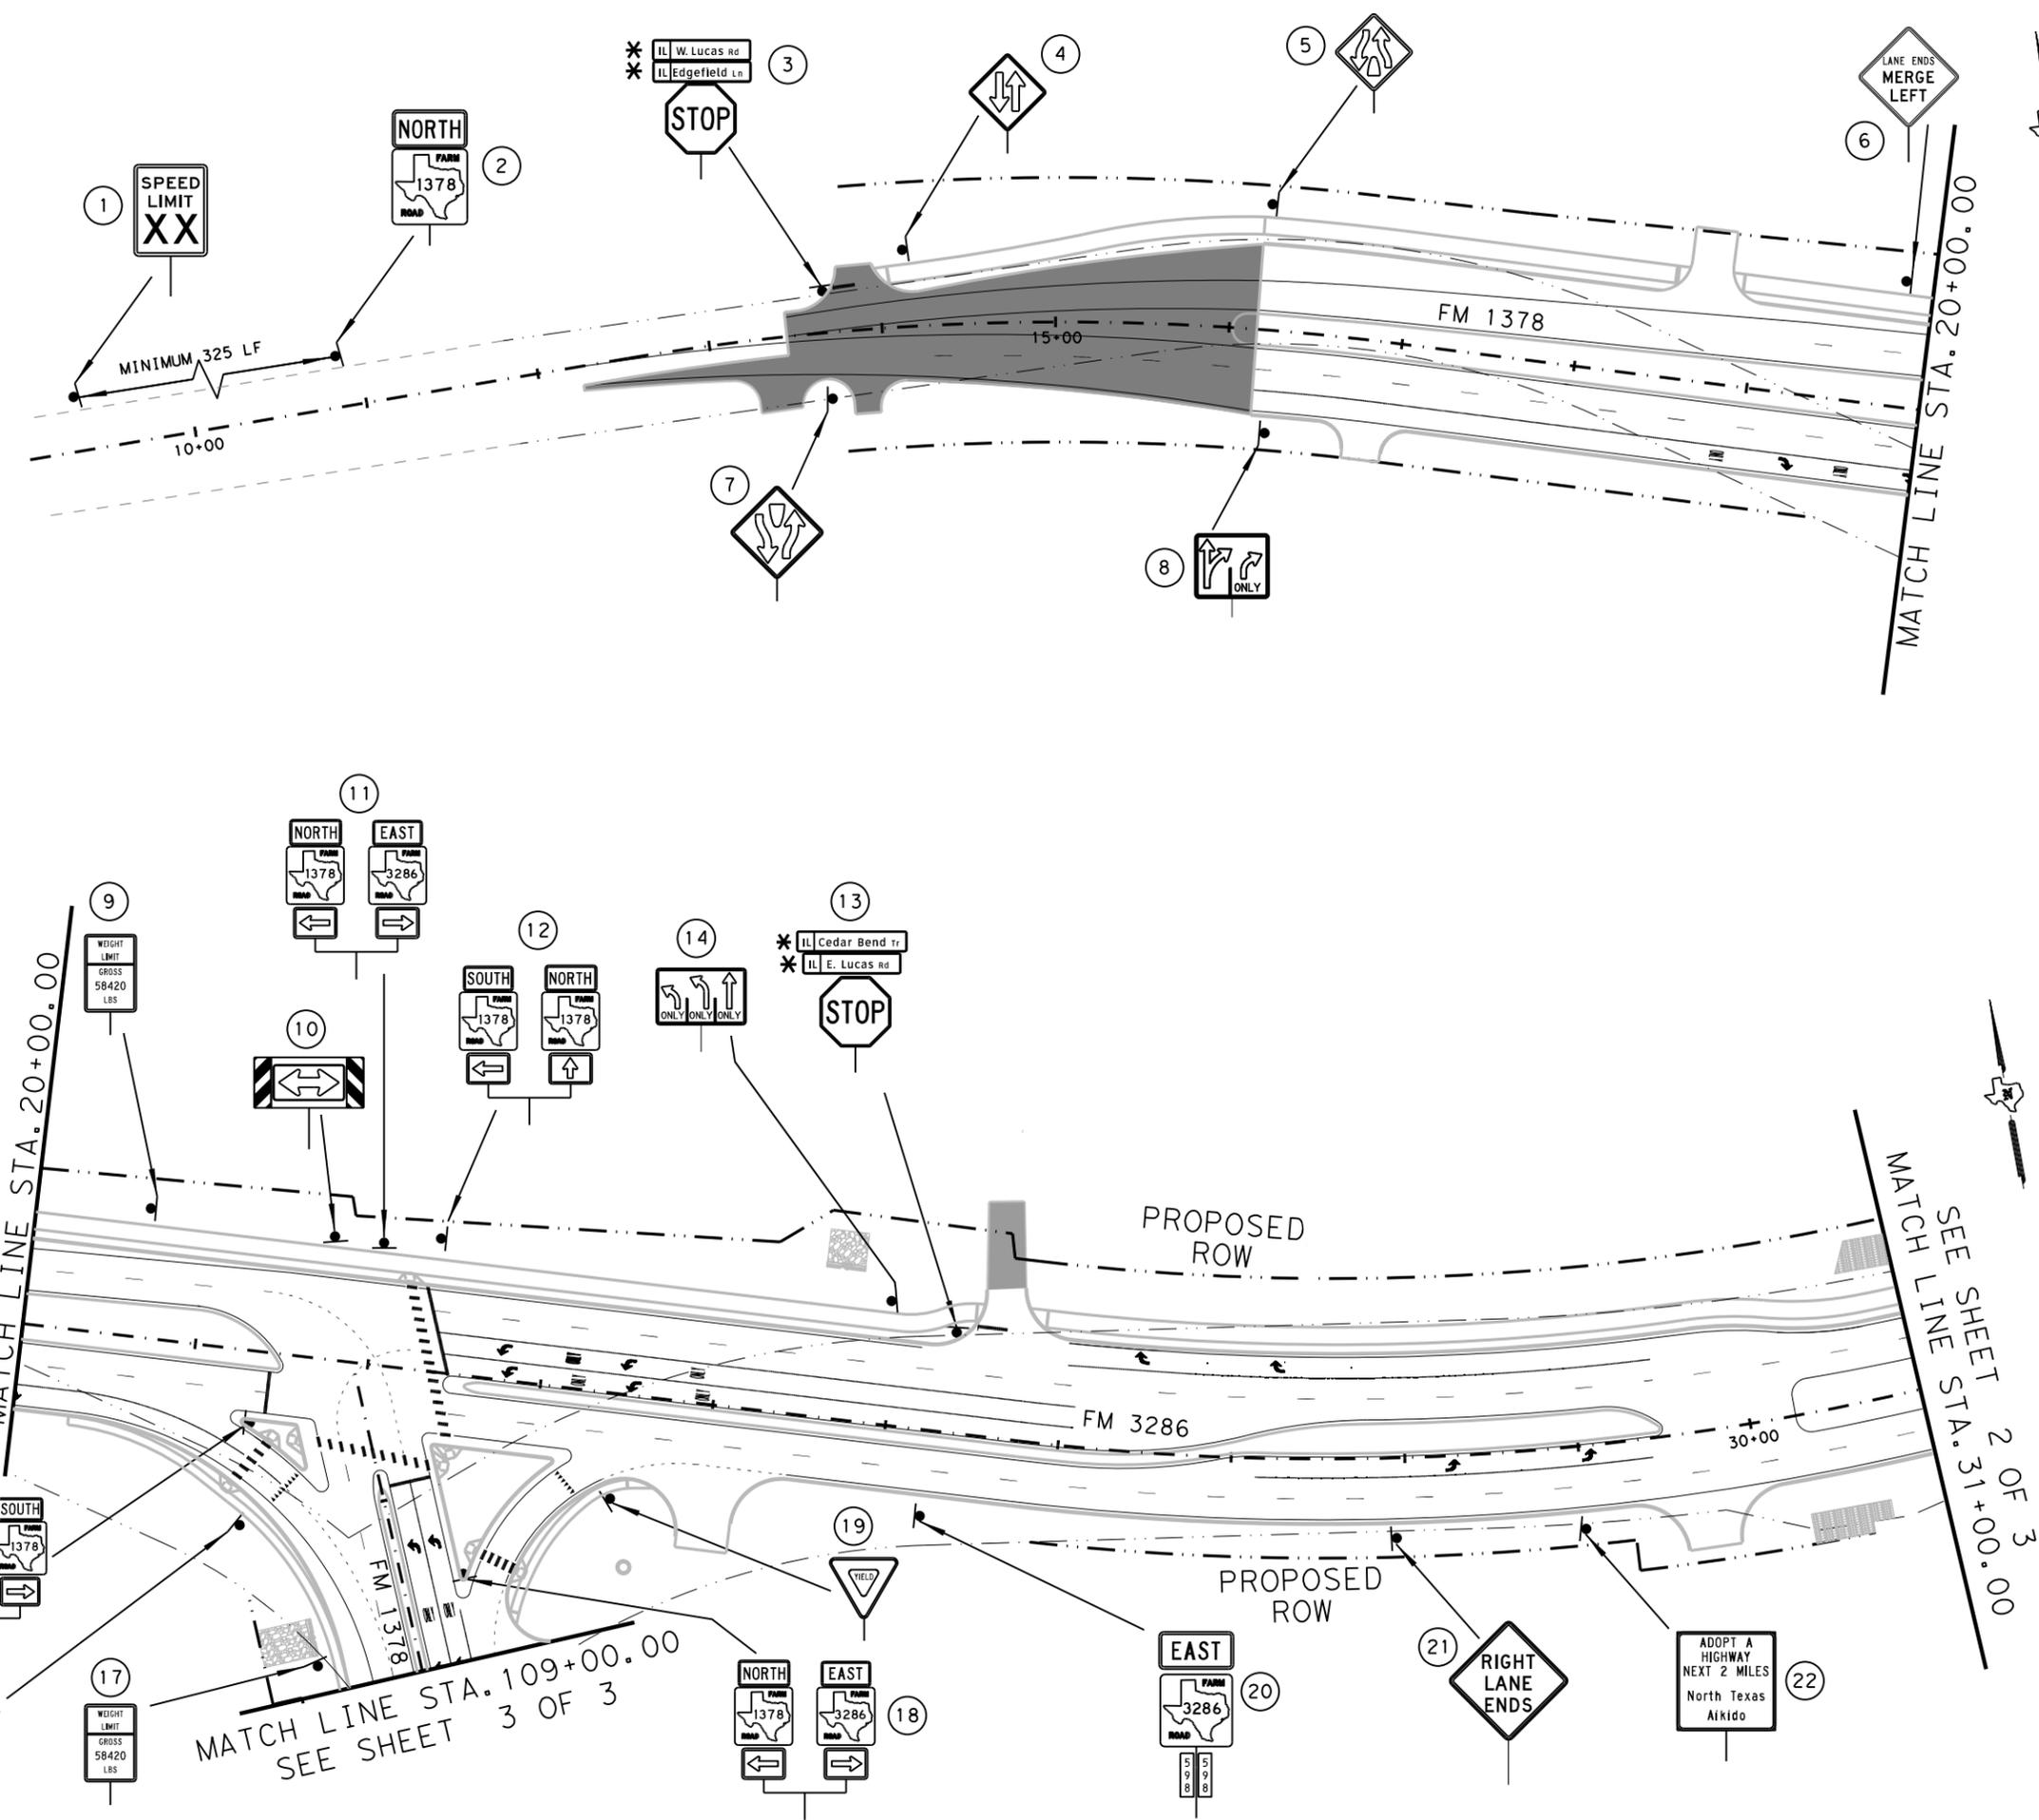

- SIGNING LEGEND**
- ① SIGN TO BE INSTALLED
 - * REUSE EXISTING STREET NAME BLADES AND MOUNT ON NEW SIGN ASSEMBLY. (EXISTING SIGN DETAILS MIGHT VARY FROM SIGNS SHOWN ON PLAN)



Mark A. Aboso, P.E. 12/15/2022
 Signature of Registrant Date

Texas Department of Transportation
 © 2022


SIGNING LAYOUT

SCALE: 1"=100' SHEET 1 OF 3

DESIGN/CK	FED. RD. DIV. NO.	FEDERAL-AID PROJECT NUMBER		HIGHWAY NO.
MAA	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK	STATE	DISTRICT	COUNTY	SHEET NO.
BLS	TEXAS	DALLAS	COLLIN	259
CHECK	CONTROL	SECTION	JOB	
BA	1392	01	044, ETC.	

\$DATE\$

\$FILE\$

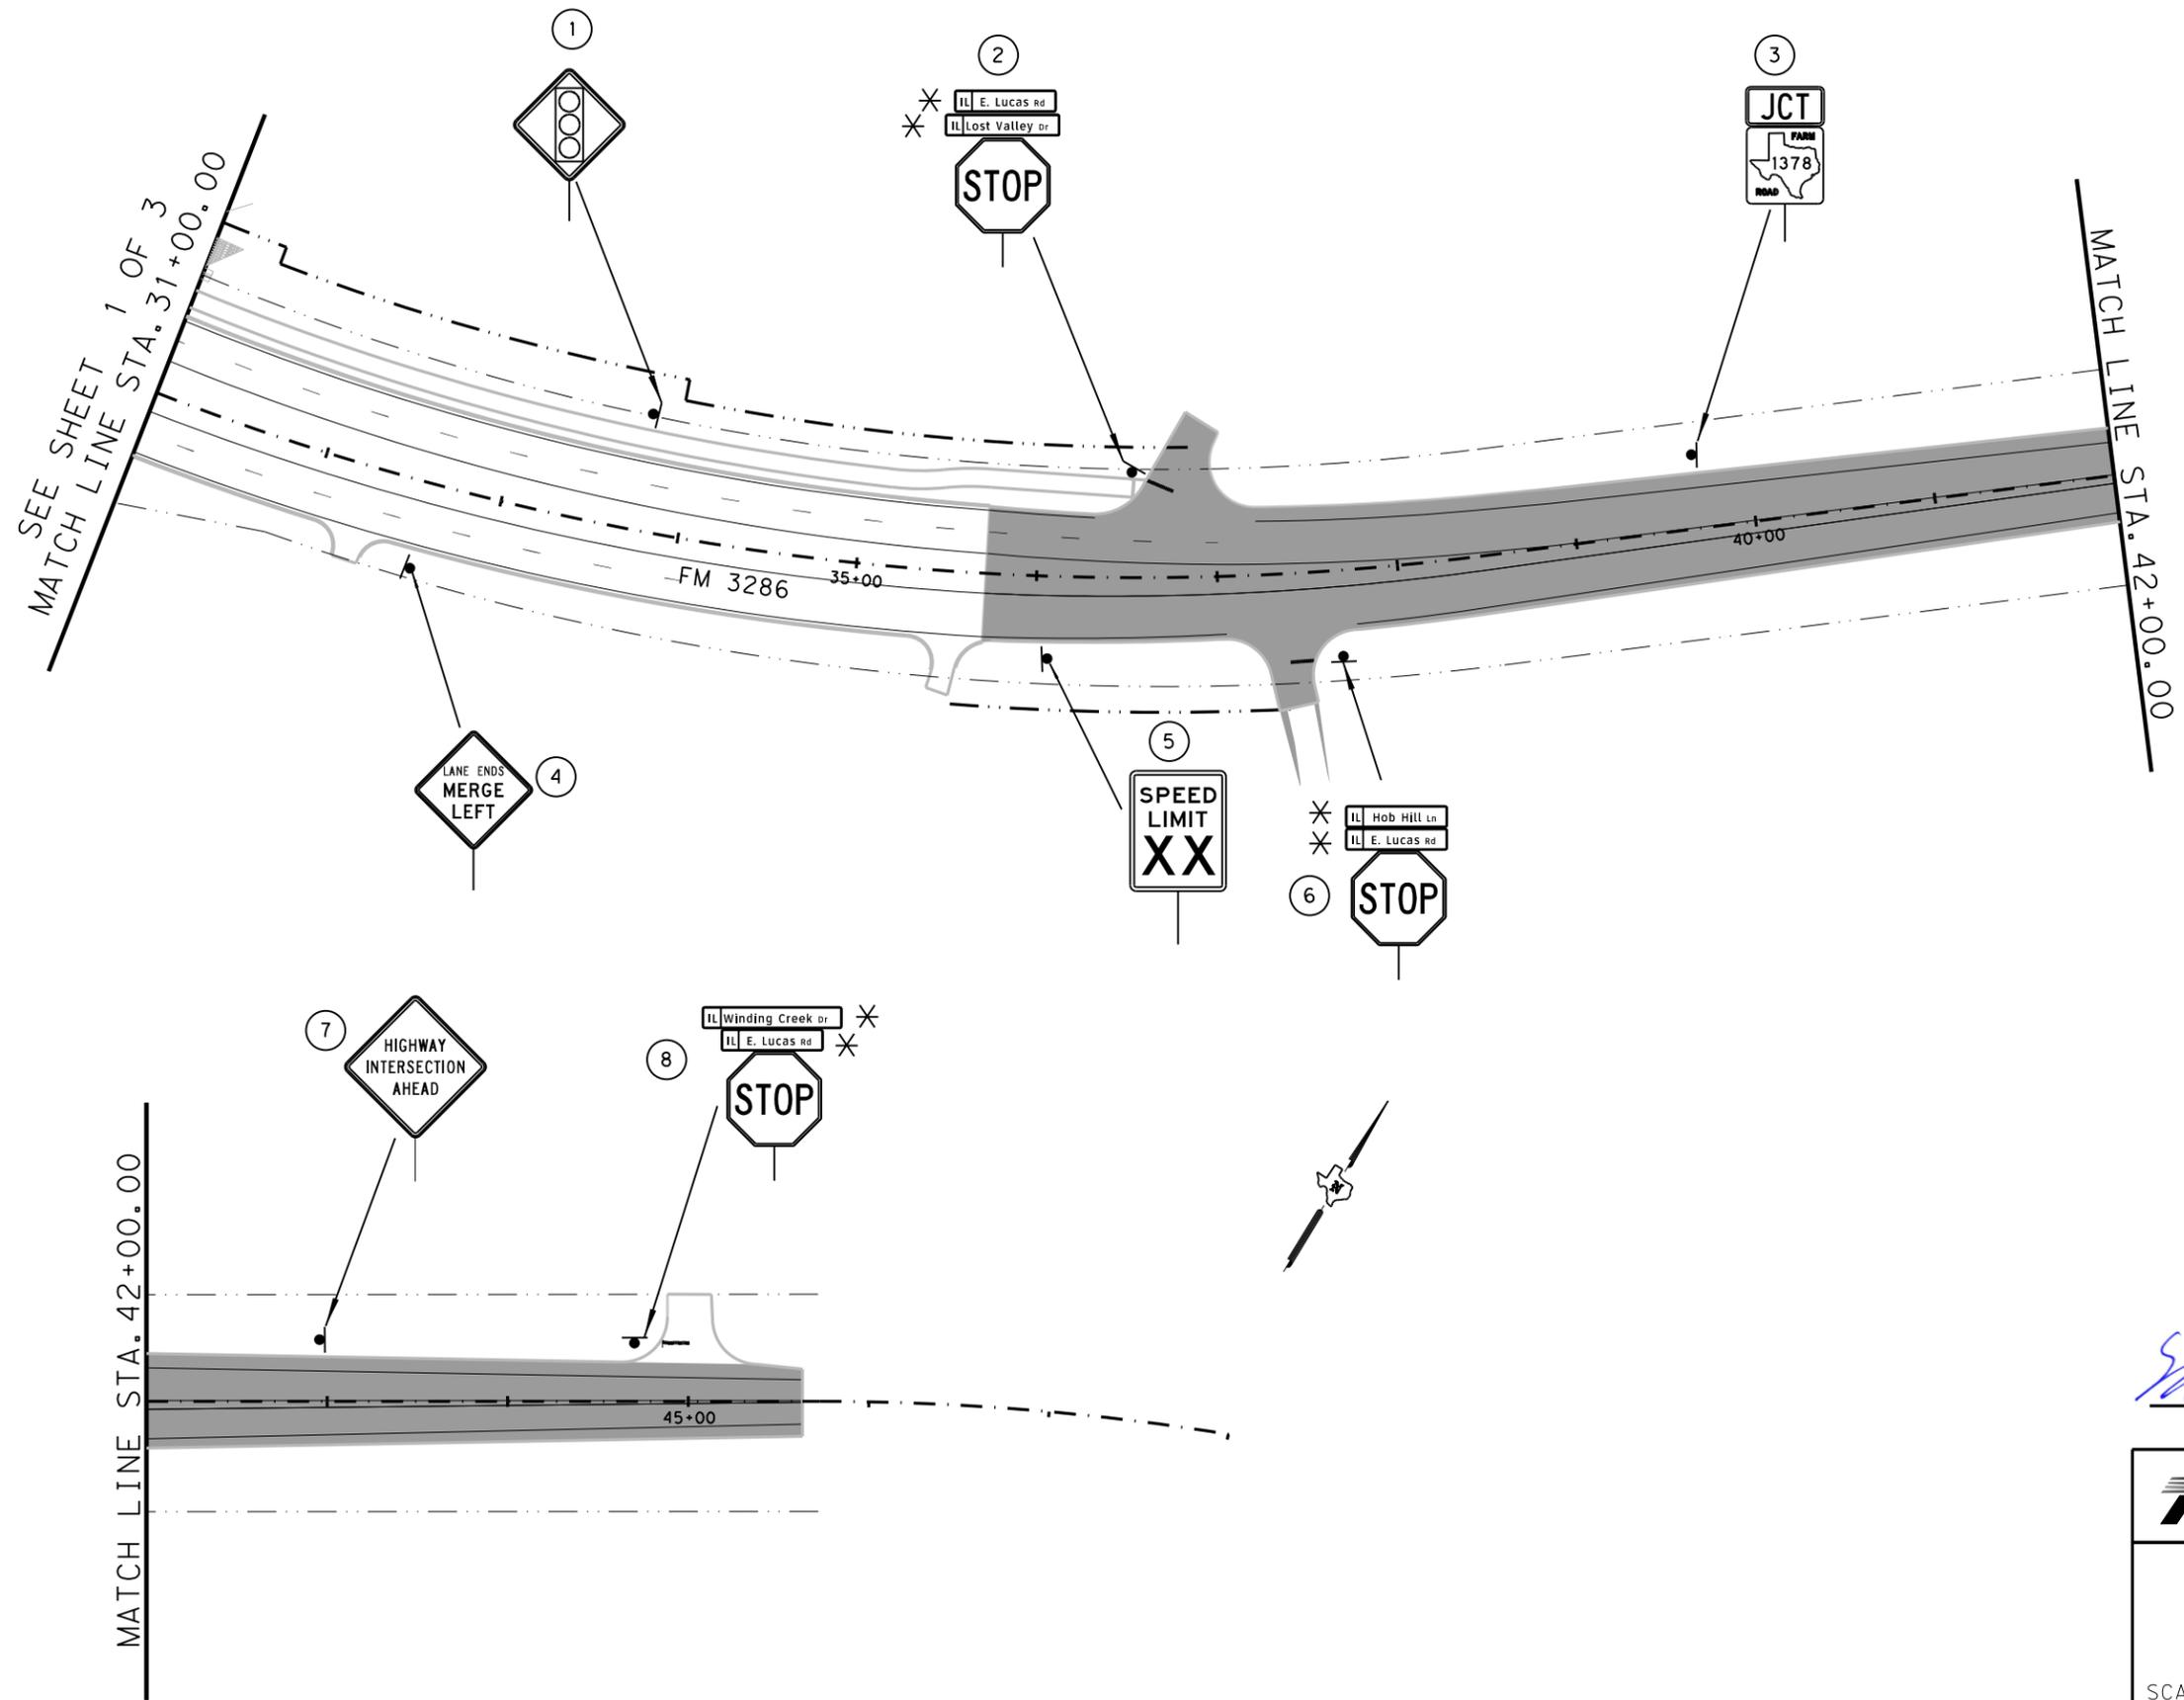

SIGNING LEGEND

① SIGN TO BE INSTALLED

* REUSE EXISTING STREET NAME BLADES AND MOUNT ON NEW SIGN ASSEMBLY. (EXISTING SIGN DETAILS MIGHT VARY FROM SIGNS SHOWN ON PLAN)



Mark A. Aboso, P.E. 12/15/2022
 Signature of Registrant Date



SIGNING LAYOUT


SCALE: 1" = 100' SHEET 2 OF 3

DESIGN/CK	FED. RD. DIV. NO.	FEDERAL-AID PROJECT NUMBER		HIGHWAY NO.
MAA	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK	STATE	DISTRICT	COUNTY	SHEET NO.
QM	TEXAS	DALLAS	COLLIN	260
CHECK	CONTROL	SECTION	JOB	
BLS	1392	01	044, ETC.	

\$DATE\$

\$FILE\$

SEE PERMANENT TRAFFIC SIGNAL LAYOUT SHEET 2 OF 5 FOR DETAILS.

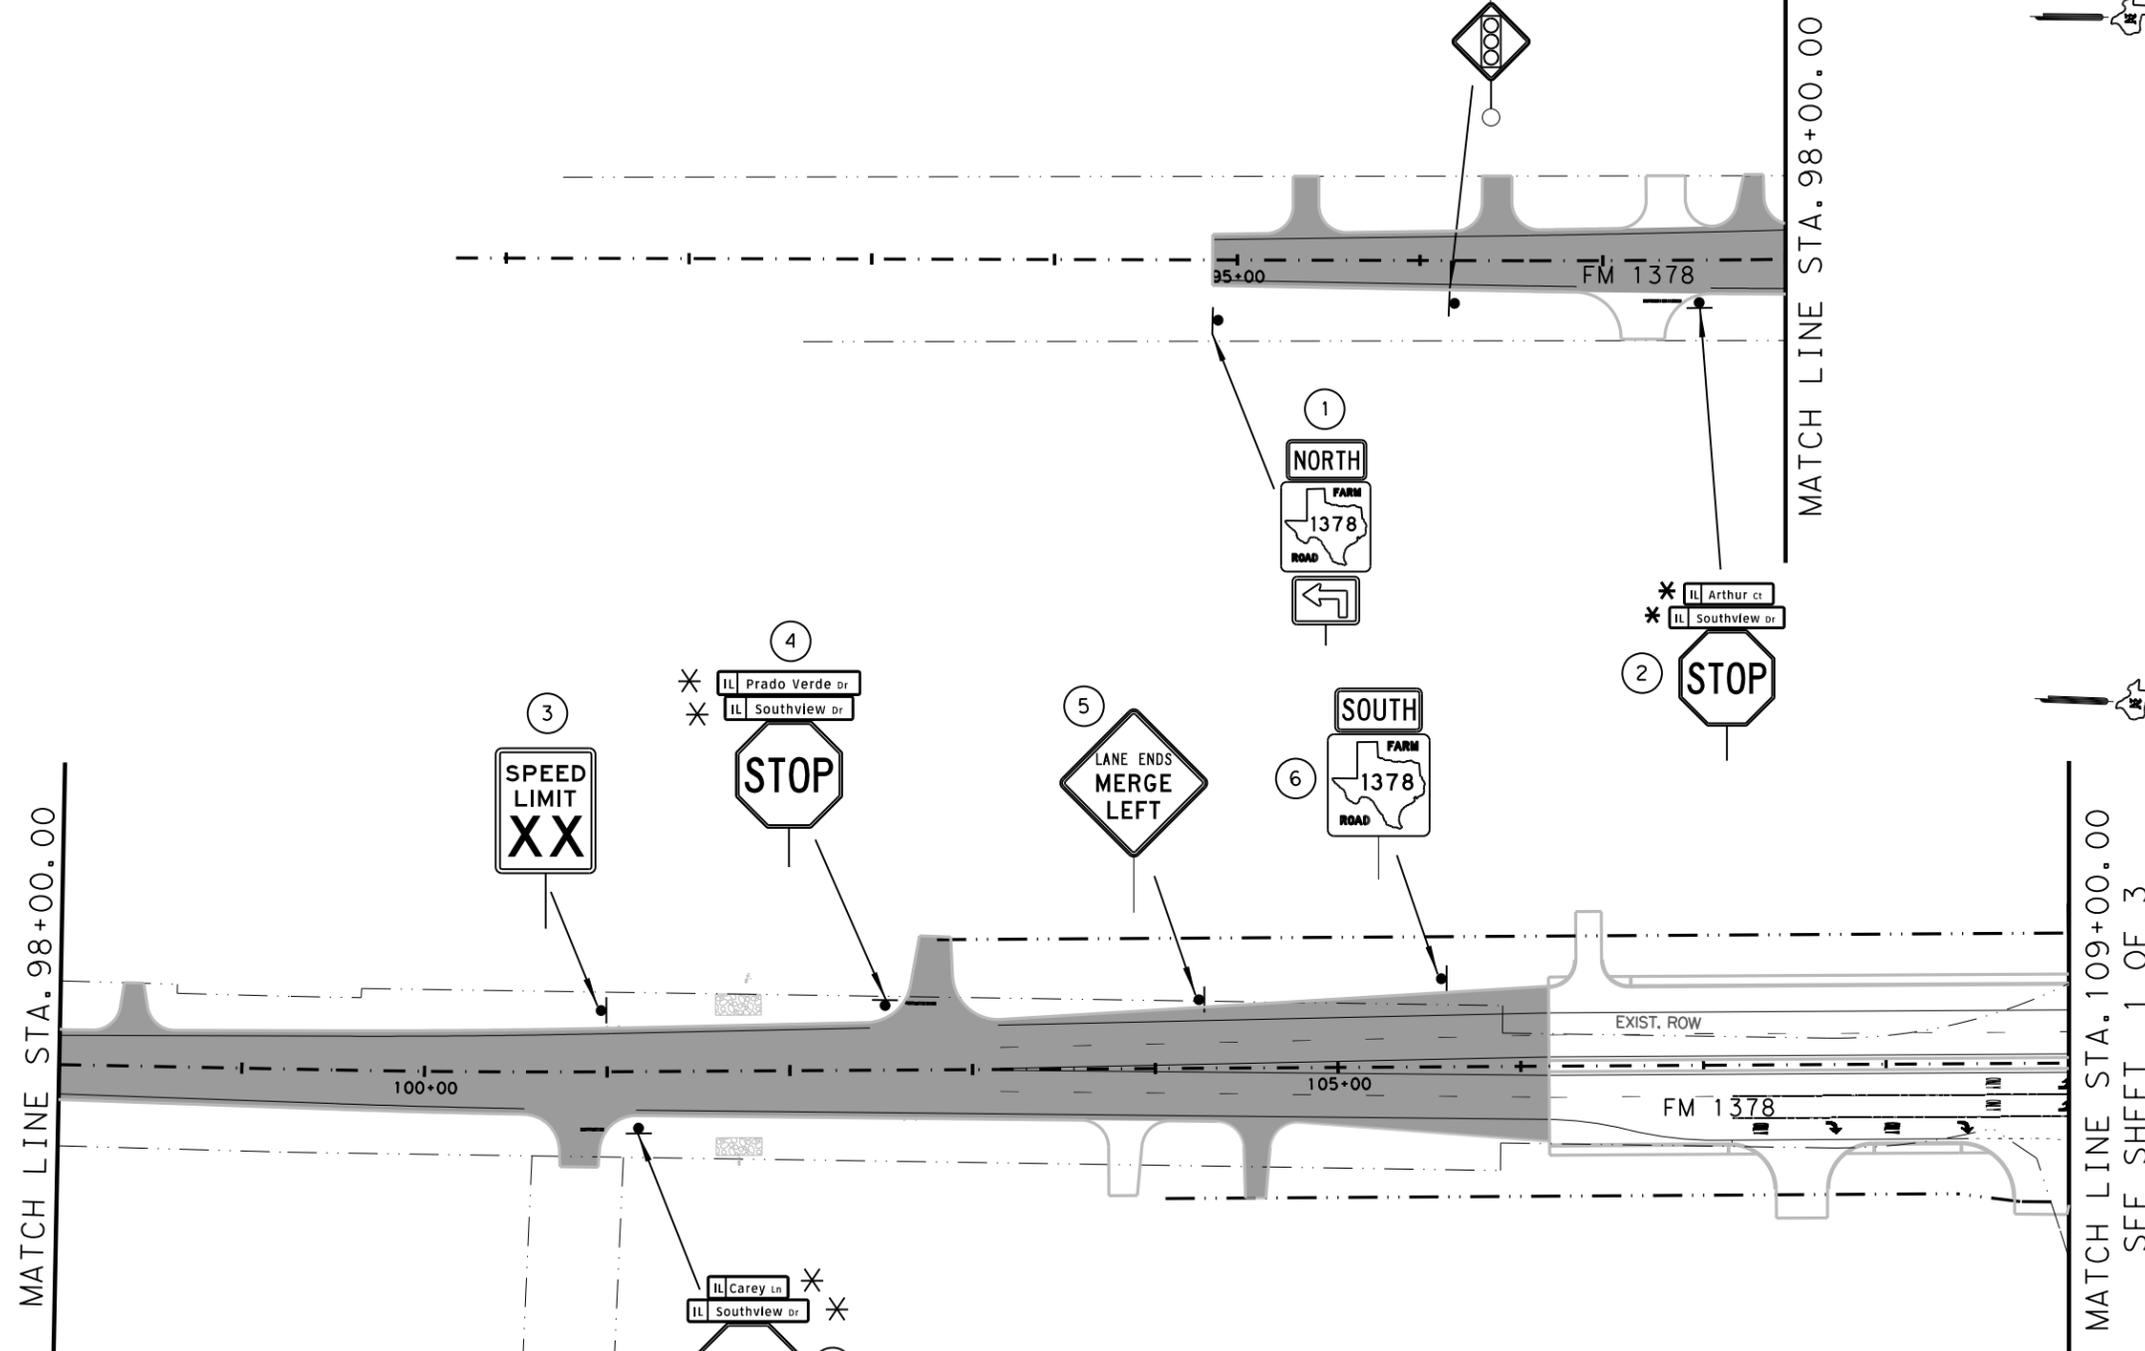

- SIGNING LEGEND**
- ① SIGN TO BE INSTALLED
 - * REUSE EXISTING STREET NAME BLADES AND MOUNT ON NEW SIGN ASSEMBLY. (EXISTING SIGN DETAILS MIGHT VARY FROM SIGNS SHOWN ON PLAN)




Mark A. Aboso, P.E. 12/15/2022
Signature of Registrant Date

Texas Department of Transportation
© 2022

SIGNING LAYOUT


SCALE: 1" = 100' SHEET 3 OF 3

DESIGN/CK	FED. RD. DIV. NO.	FEDERAL-AID PROJECT NUMBER		HIGHWAY NO.
MAA	6	SEE TITLE SHEET		FM 1378, ETC.
CHECK	STATE	DISTRICT	COUNTY	SHEET NO.
QM	TEXAS	DALLAS	COLLIN	261
BLS	CONTROL	SECTION	JOB	
CHECK	BA	1392	01	044, ETC.

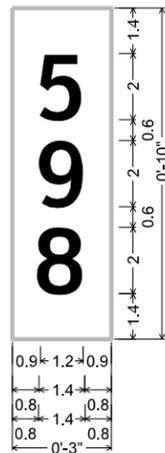

D10-7aT;
 No border, White on Green;
 "5", ClearviewHwy-4-W;
 "9", ClearviewHwy-4-W;
 "8", ClearviewHwy-4-W;

SHEET 1 SIGN 20

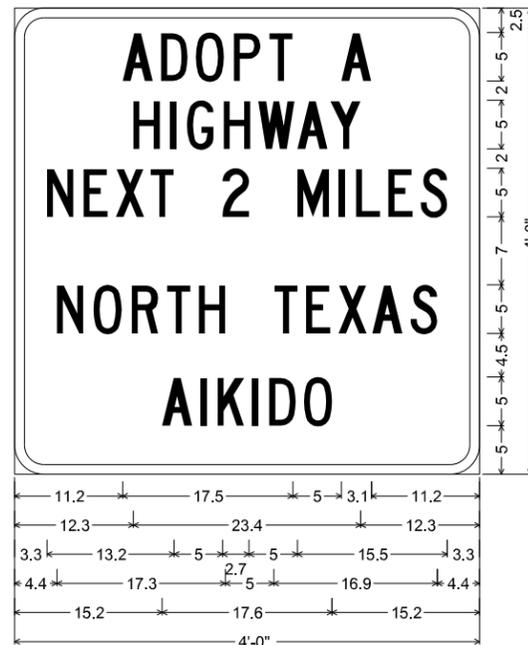

D14-4T;
 3.0" Radius, 1.0" Border, White on Blue;
 "ADOPT A", C; "HIGHWAY", C; "NEXT 2 MILES", C;
 "NORTH TEXAS", C; "AIKIDO", C;

SHEET 1 SIGN 22



Mark A. Aboso, P.E. 12/15/2022
 Signature of Registrant Date




GUIDE SIGN DETAILS



SCALE: NTS SHEET 1 OF 1

DESIGN/CK	FED. RD. DIV. NO.	FEDERAL-AID PROJECT NUMBER		HIGHWAY NO.
MAA	6	SEE TITLE SHEET		FM 1378, ETC
BLS	STATE	DISTRICT	COUNTY	
BA	TEXAS	DALLAS	COLLIN	
BA	CONTROL	SECTION	JOB	
FRC	1392	01	044, ETC	

262



- LEGEND**
- (A) (W) 6" (SLD) TY I
 - (B) (W) 6" (BRK) TY I
 - (C) (W) 8" (SLD) TY I
 - (D) (W) 24" (SLD) TY I
 - (E) (W) (ARROW) TY I
 - (F) (W) (WORD) TY I
 - (G) (W) 6" (SLD) TY II
 - (H) (W) 6" (BRK) TY II
 - (I) (W) 8" (SLD) TY II
 - (J) (W) 24" (SLD) TY II
 - (K) (W) (ARROW) TY II
 - (L) (W) (WORD) TY II
 - (M) (Y) 6" (SLD) TY I
 - (N) (Y) 6" (SLD) TY II
 - (O) (W) 6" (DOT) TY I
 - (P) (W) 6" (DOT) TY II
 - (Q) REFL PAV MRKR TY II-C-R
 - (R) PAV SURF PREP FOR MKR (6')
 - (S) PAV SURF PREP FOR MKR (8')
 - (T) PAV SURF PREP FOR MKR (24')
 - (U) PAV SURF PREP FOR ARROW
 - (V) PAV SURF PREP FOR WORD
 - (W) PAV SURF PREP FOR RPM
 - (X) INSTL OM ASSM (OM-22) (FLX) GND
 - (Y) REFL PAV MRKR TY II A-A
 - (Z) REF PAV MRK TY I (W) 36" (YLD TRI)
 - (Z1) REFL PAV MRK TY II (W) 36" (YLD TRI)
 - (Z2) PAV SURF PREP FOR MKR (36") (YLD TRI)

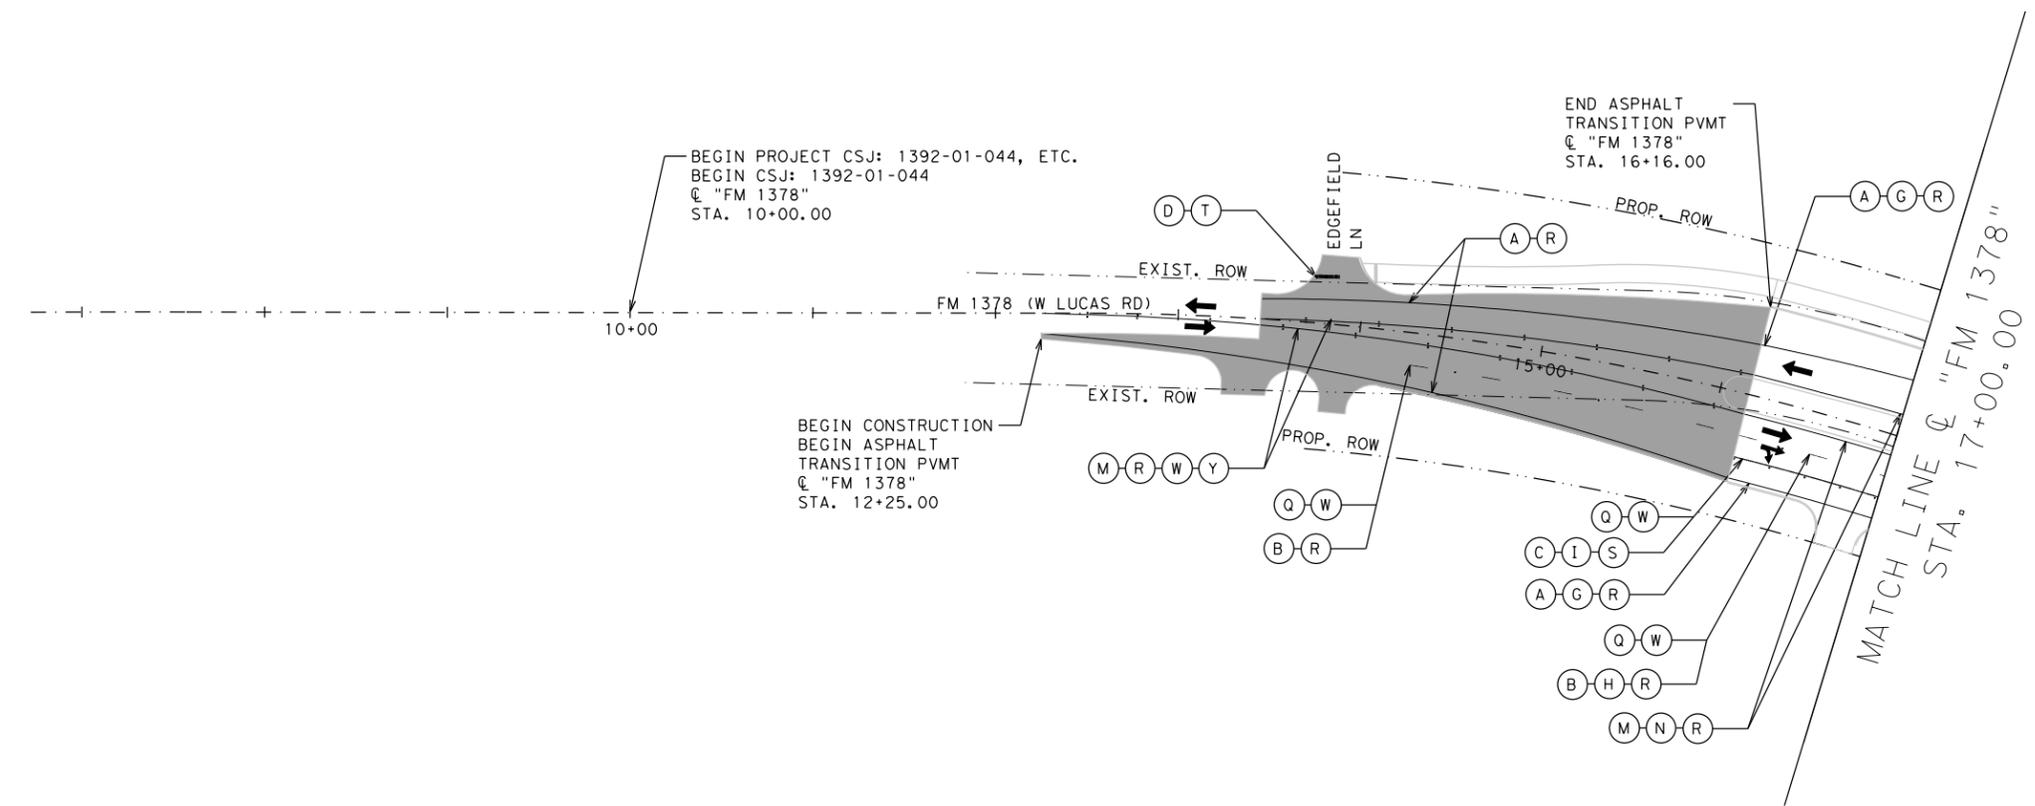

Abraham El Saad, P.E. 2-20-23
Signature of Registrant & Date

LOCATION	666 6036	666 6048	666 6171	666 6174	666 6178	666 6210	666 6306	666 6309	666 6321	672 6010	672 6009	678 6033
FM 1378 CSJ: 1392-01-044	REFL PAV MRK TY I (W) 8" (SLD) (100MIL)	REFL PAV MRK TY I (W) 24" (SLD) (100MIL)	REFL PAV MRK TY II (W) 6" (BRK)	REFL PAV MRK TY II (W) 6" (SLD)	REFL PAV MRK TY II (W) 8" (SLD)	REFL PAV MRK TY II (Y) 6" (SLD)	RE PM W/RET REQ TY I (W) 6" (BRK) (100MIL)	RE PM W/RET REQ TY I (W) 6" (SLD) (100MIL)	RE PM W/RET REQ TY I (Y) 6" (SLD) (100MIL)	REFL PAV MRK TY II-C-R	REFL PAV MRK TY II-A-A	PAV SURF PREP FOR MKR (RPM)
	LF	LF	LF	LF	LF	LF	LF	LF	LF	EA	EA	EA
PROJECT TOTALS	84	13	21	169	84	167	77	827	830	8	34	42

678 6002	678 6004	678 6008
PAV SURF PREP FOR MKR (6")	PAV SURF PREP FOR MKR (8")	PAV SURF PREP FOR MKR (24")
LF	LF	LF
1734	84	13

© 2023

Texas Department of Transportation

**FM 1378
AT FM 3286
PAVEMENT MARKINGS
LAYOUT**


SCALE: 1"=100' SHEET 1 OF 6

DESIGN IE	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO.		HIGHWAY NO. FM 1378, ETC.
GRAPHICS IE	STATE TEXAS	DISTRICT DAL	COUNTY COLLIN	SHEET NO. 263
CHECK JI/IE	CONTROL 1392	SECTION 01	JOB 044, ETC.	

FILE: c:\txdot\pw\onl\ine\txdot5\ibrahim.e\saad\0326860\FM 1378 Stripping Layout.dgn
 DATE: 2/13/2023
 TIME: 3:43:11 PM




- LEGEND**
- (A) (W) 6" (SLD) TY I
 - (B) (W) 6" (BRK) TY I
 - (C) (W) 8" (SLD) TY I
 - (D) (W) 24" (SLD) TY I
 - (E) (W) (ARROW) TY I
 - (F) (W) (WORD) TY I
 - (G) (W) 6" (SLD) TY II
 - (H) (W) 6" (BRK) TY II
 - (I) (W) 8" (SLD) TY II
 - (J) (W) 24" (SLD) TY II
 - (K) (W) (ARROW) TY II
 - (L) (W) (WORD) TY II
 - (M) (Y) 6" (SLD) TY I
 - (N) (Y) 6" (SLD) TY II
 - (O) (W) 6" (DOT) TY I
 - (P) (W) 6" (DOT) TY II
 - (Q) REFL PAV MRKR TY II-C-R
 - (R) PAV SURF PREP FOR MKR (6")
 - (S) PAV SURF PREP FOR MKR (8")
 - (T) PAV SURF PREP FOR MKR (24")
 - (U) PAV SURF PREP FOR ARROW
 - (V) PAV SURF PREP FOR WORD
 - (W) PAV SURF PREP FOR RPM
 - (X) INSTL OM ASSM (OM-22) (FLX) GND
 - (Y) REFL PAV MRKR TY II A-A
 - (Z) REF PAV MRK TY I (W) 36" (YLD TRI)
 - (Z1) REFL PAV MRK TY II (W) 36" (YLD TRI)
 - (Z2) PAV SURF PREP FOR MKR (36") (YLD TRI)

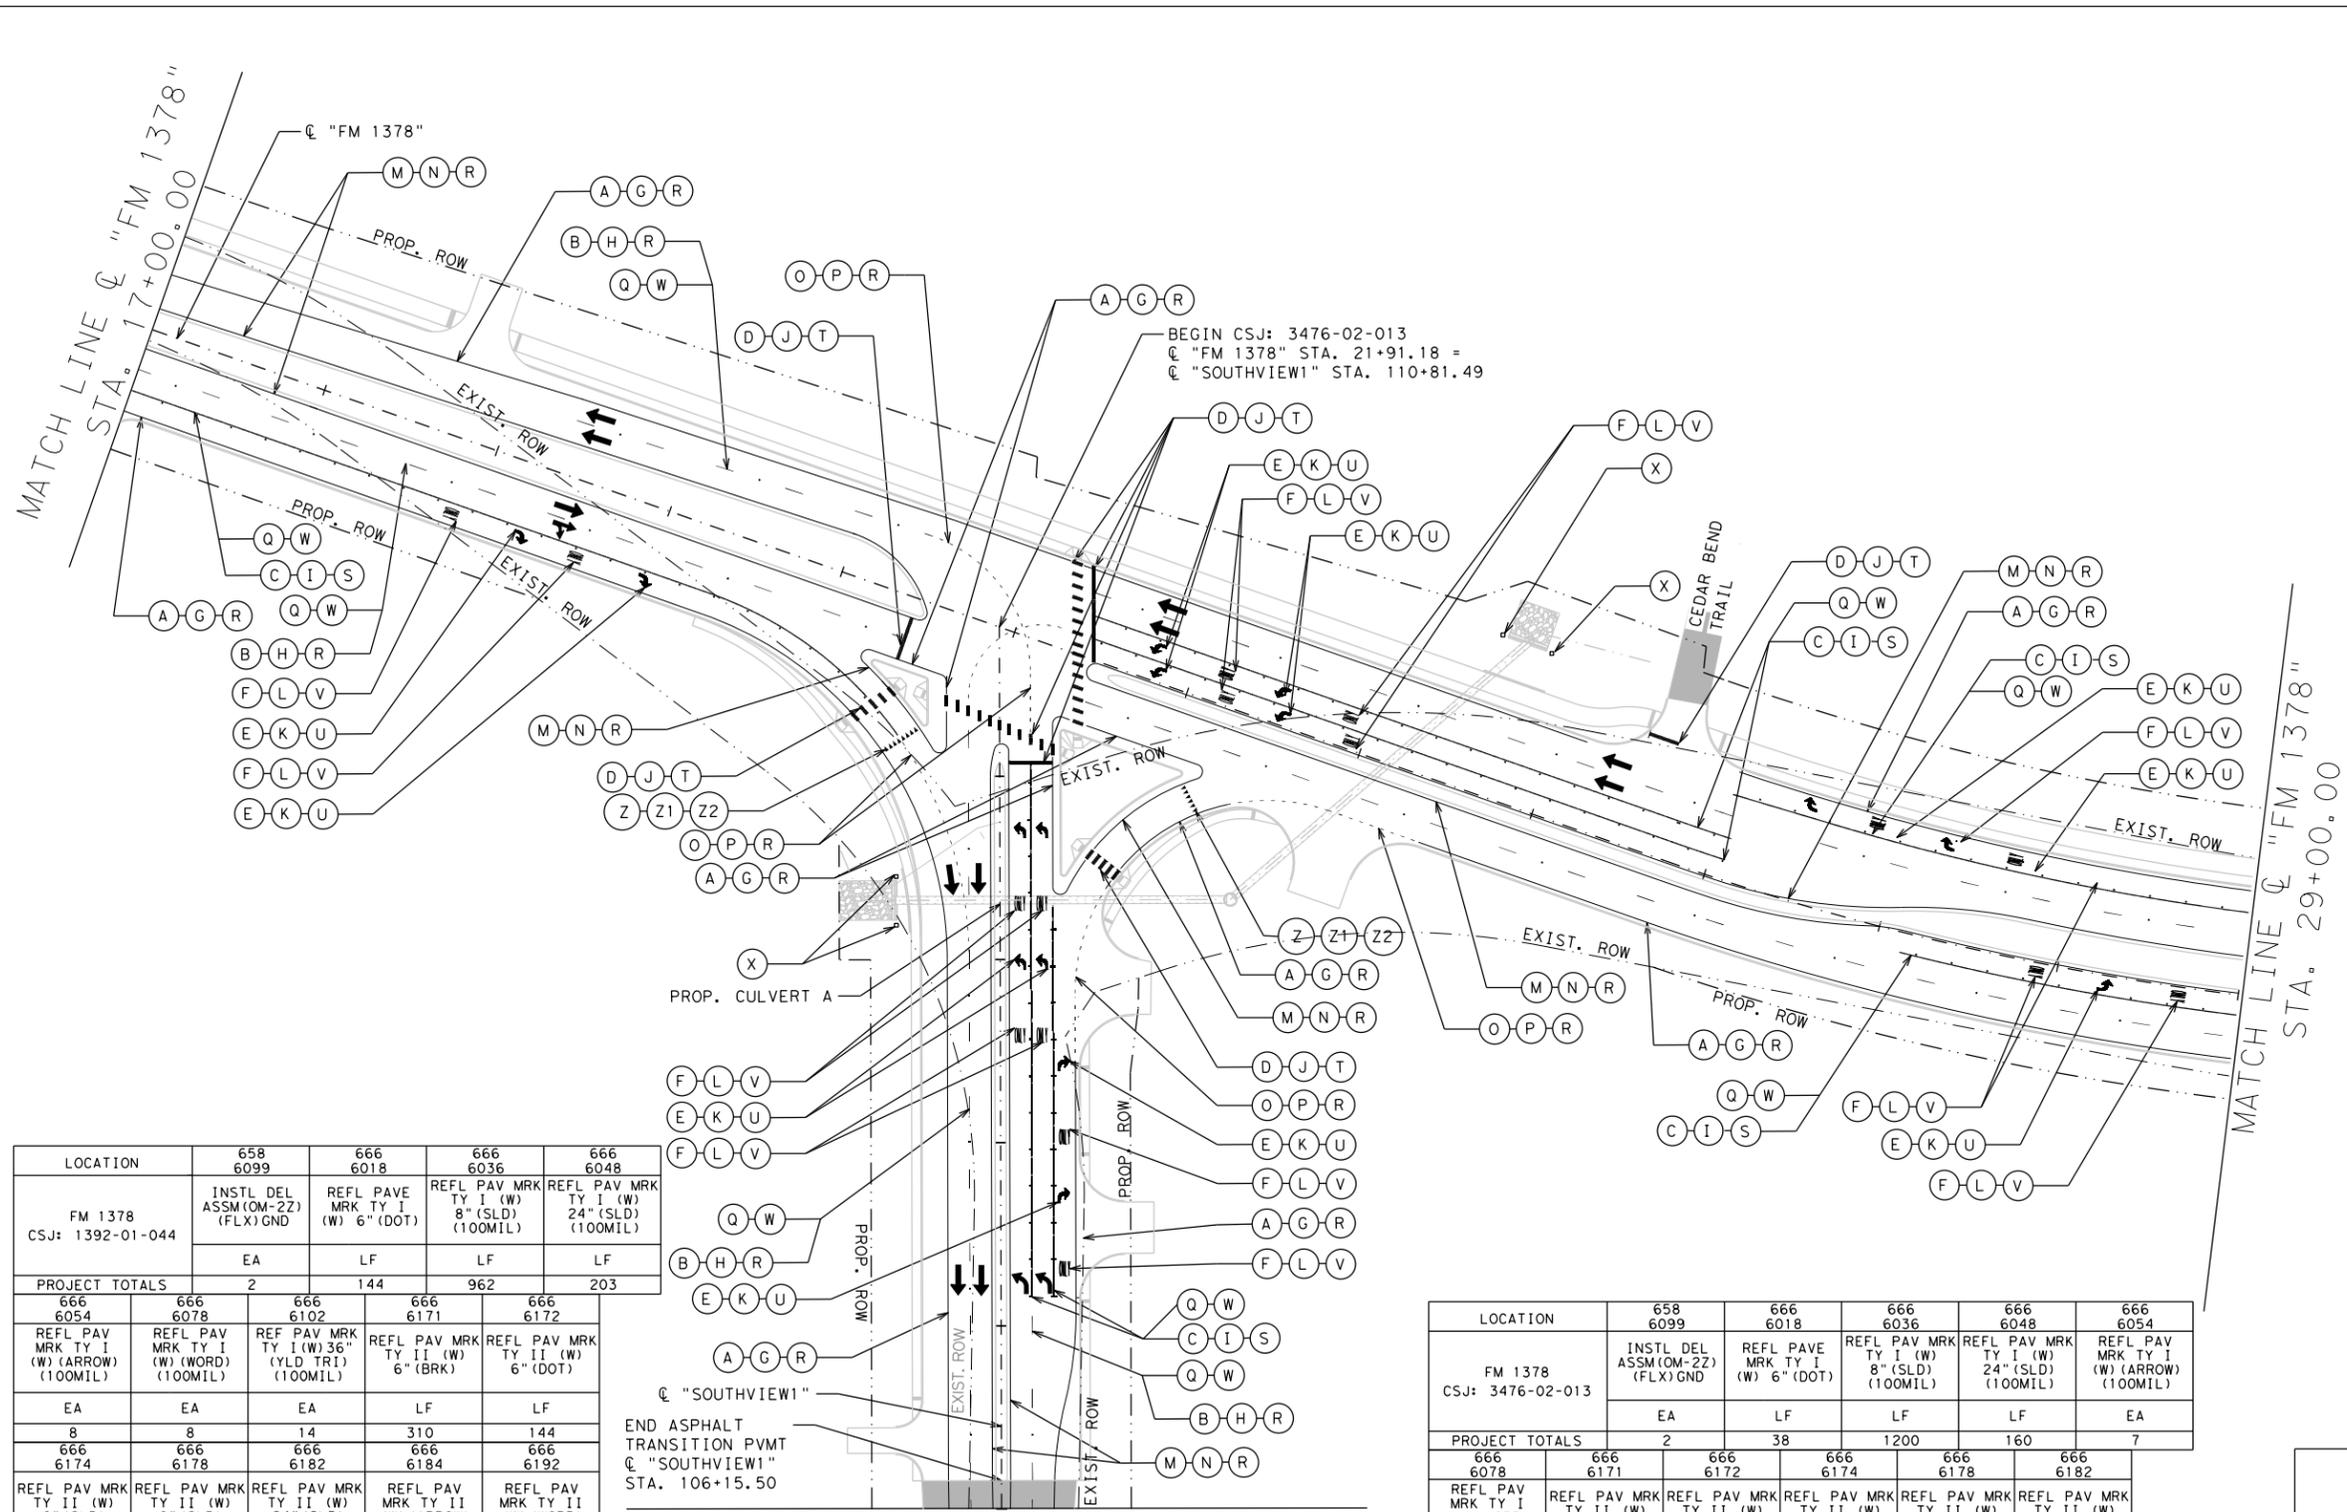

LOCATION	658 6099	666 6018	666 6036	666 6048
FM 1378 CSJ: 1392-01-044	INSTL DEL ASSM (OM-22) (FLX) GND	REFL PAVE MRK TY I (W) 6" (DOT)	REFL PAV MRK TY I (W) 8" (SLD) (100MIL)	REFL PAV MRK TY I (W) 24" (SLD) (100MIL)
	EA	LF	LF	LF
PROJECT TOTALS	2	144	962	203
666 6054	666 6078	666 6102	666 6171	666 6172
REFL PAV MRK TY I (W) (ARROW) (100MIL)	REFL PAV MRK TY I (W) (WORD) (100MIL)	REF PAV MRK TY I (W) 36" (YLD TRI) (100MIL)	REFL PAV MRK TY II (W) 6" (BRK)	REFL PAV MRK TY II (W) 6" (DOT)
EA	EA	EA	LF	LF
8	8	14	310	144
666 6174	666 6178	666 6182	666 6184	666 6192
REFL PAV MRK TY II (W) 6" (SLD)	REFL PAV MRK TY II (W) 8" (SLD)	REFL PAV MRK TY II (W) 24" (SLD)	REFL PAV MRK TY II (W) (ARROW)	REFL PAV MRK TY II (W) (WORD)
EA	LF	LF	EA	EA
1819	962	203	8	8
666 6199	666 6210	666 6306	666 6309	666 6321
REFL PAV MRK TY II (W) 36" (YLD TRI)	REFL PAV MRK TY II (Y) 6" (SLD)	RE PM W/RET REQ TY I (W) 6" (BRK) (100MIL)	RE PM W/RET REQ TY I (W) 6" (SLD) (100MIL)	RE PM W/RET REQ TY I (Y) 6" (SLD) (100MIL)
EA	LF	LF	LF	EA
14	1826	330	1850	1857
678 6002	678 6004	678 6008	678 6009	678 6016
PAV SURF PREP FOR MRK (4")	PAV SURF PREP FOR MRK (8")	PAV SURF PREP FOR MRK (24")	PAV SURF PREP FOR MRK (ARROW)	PAV SURF PREP FOR MRK (WORD)
EA	EA	EA	EA	EA
4030	962	203	8	8
				14
				76

LOCATION	658 6099	666 6018	666 6036	666 6048	666 6054
FM 1378 CSJ: 3476-02-013	INSTL DEL ASSM (OM-22) (FLX) GND	REFL PAVE MRK TY I (W) 6" (DOT)	REFL PAV MRK TY I (W) 8" (SLD) (100MIL)	REFL PAV MRK TY I (W) 24" (SLD) (100MIL)	REFL PAV MRK TY I (W) (ARROW) (100MIL)
	EA	LF	LF	LF	EA
PROJECT TOTALS	2	38	1200	160	7
666 6078	666 6171	666 6172	666 6174	666 6178	666 6182
REFL PAV MRK TY I (W) (ARROW) (100MIL)	REFL PAV MRK TY II (W) 6" (BRK)	REFL PAV MRK TY II (W) 6" (DOT)	REFL PAV MRK TY II (W) 6" (SLD)	REFL PAV MRK TY II (W) 8" (SLD)	REFL PAV MRK TY II (W) 24" (SLD)
EA	LF	LF	LF	LF	LF
8	332	38	1171	1200	160
666 6184	666 6192	666 6210	666 6306	666 6309	666 6321
REFL PAV MRK TY I (W) (ARROW)	REFL PAV MRK TY II (W) (WORD)	REFL PAV MRK TY II (Y) 6" (SLD)	RE PM W/RET REQ TY I (W) 6" (BRK) (100MIL)	RE PM W/RET REQ TY I (W) 6" (SLD) (100MIL)	RE PM W/RET REQ TY I (Y) 6" (SLD) (100MIL)
EA	EA	LF	LF	LF	LF
7	8	1367	332	1171	1367
672 6010	678 6002	678 6004	678 6008	678 6009	678 6016
REFL PAV MRK TY II-C-R	PAV SURF PREP FOR MRK (6")	PAV SURF PREP FOR MRK (8")	PAV SURF PREP FOR MRK (24")	PAV SURF PREP FOR MRK (ARROW)	PAV SURF PREP FOR MRK (WORD)
EA	EA	EA	EA	EA	EA
62	2870	1200	160	7	8



Abraham I. El Saad, P.E. 2-20-23
Signature of Registrant & Date




**FM 1378
AT FM 3286
PAVEMENT MARKINGS
LAYOUT**



SCALE: 1"=100' SHEET 2 OF 6

DESIGN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
IE	6	SEE TITLE SHEET		FM 1378, ETC.
GRAPHICS	STATE	DISTRICT	COUNTY	SHEET NO.
IE	TEXAS	DAL	COLLIN	264
CHECK J/I/E	CONTROL	SECTION	JOB	
CHECK	1392	01	044, ETC.	

FILE: c:\t\dot\pw\onl\ine\t\dot\5\ibrahim.e\saad\0326860\FM 1378 Stripping Layout.dgn
DATE: 2/13/2023 TIME: 3:44:18 PM



- LEGEND**
- (A) (W) 6" (SLD) TY I
 - (B) (W) 6" (BRK) TY I
 - (C) (W) 8" (SLD) TY I
 - (D) (W) 24" (SLD) TY I
 - (E) (W) (ARROW) TY I
 - (F) (W) (WORD) TY I
 - (G) (W) 6" (SLD) TY II
 - (H) (W) 6" (BRK) TY II
 - (I) (W) 8" (SLD) TY II
 - (J) (W) 24" (SLD) TY II
 - (K) (W) (ARROW) TY II
 - (L) (W) (WORD) TY II
 - (M) (Y) 6" (SLD) TY I
 - (N) (Y) 6" (SLD) TY II
 - (O) (W) 6" (DOT) TY I
 - (P) (W) 6" (DOT) TY II
 - (Q) REFL PAV MRKR TY II-C-R
 - (R) PAV SURF PREP FOR MKR (6")
 - (S) PAV SURF PREP FOR MKR (8")
 - (T) PAV SURF PREP FOR MKR (24")
 - (U) PAV SURF PREP FOR ARROW
 - (V) PAV SURF PREP FOR WORD
 - (W) PAV SURF PREP FOR RPM
 - (X) INSTL OM ASSM (OM-22) (FLX) GND
 - (Y) REFL PAV MRKR TY II A-A
 - (Z) REF PAV MRK TY I (W) 36" (YLD TRI)
 - (Z1) REFL PAV MRK TY II (W) 36" (YLD TRI)
 - (Z2) PAV SURF PREP FOR MKR (36") (YLD TRI)

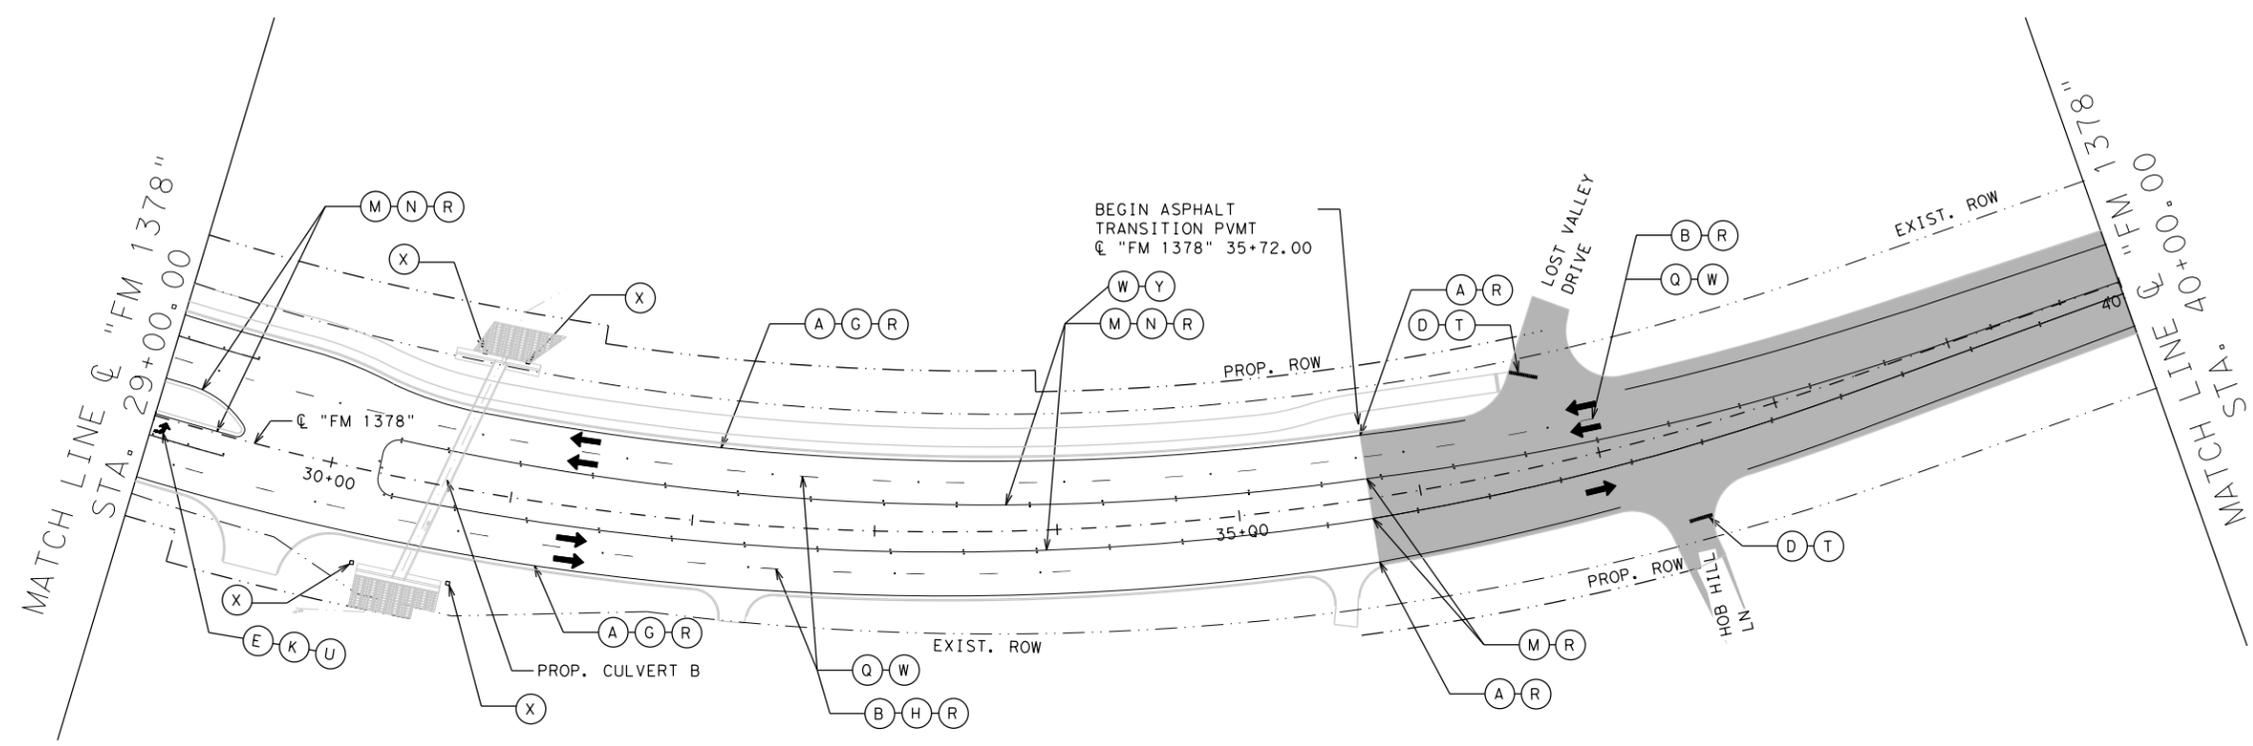

Abraham I. Saad, P.E. 2-20-23
 Signature of Registrant & Date

FILE: c:\txdot\pw\onl\ine\txdot5\ibrahim.e\saad\032860\FM 1378 Stripping Layout.dgn
 TIME: 3:44:50 PM
 DATE: 2/13/2023

LOCATION	658 6099	666 6036	666 6048	666 6054	666 6171	666 6174	666 6178	666 6184	666 6210	666 6306	666 6309	666 6321	672 6010
FM 1378 CSJ: 3476-02-013	INTSL DEL ASSM (OM-22) (FLX) GND	REFL PAV MRK TY I (W) 8" (SLD) (100MIL)	REFL PAV MRK TY I (W) 24" (SLD) (100MIL)	REFL PAV MRK TY I (W) (ARROW) (100MIL)	REFL PAV MRK TY II (W) 6" (BRK)	REFL PAV MRK TY II (W) 6" (SLD)	REFL PAV MRK TY II (W) 8" (SLD)	REFL PAV MRK TY II (W) (ARROW)	REFL PAV MRK TY II (Y) 6" (SLD)	RE PM W/RET REQ TY I (W) 6" (BRK) (100MIL)	RE PM W/RET REQ TY I (W) 6" (SLD) (100MIL)	RE PM W/RET REQ TY I (Y) 6" (SLD) (100MIL)	REFL PAV MRK TY II-C-R
	EA	LF	LF	EA	LF	LF	LF	EA	LF	LF	LF	LF	EA
PROJECT TOTALS	4	89	29	1	300	1327	89	1	1219	338	2020	2075	24

672 6009	678 6002	678 6004	678 6008	678 6009	678 6033
REFL PAV MRK TY II-A-A	PAV SURF PREP FOR MKR (6")	PAV SURF PREP FOR MKR (8")	PAV SURF PREP FOR MKR (24")	PAV SURF PREP FOR MKR (ARROW)	PAV SURF PREP FOR MKR (RPM)
EA	LF	LF	LF	EA	EA
102	4395	89	29	1	126



FM 1378
AT FM 3286
PAVEMENT MARKINGS
LAYOUT


SCALE: 1"=100' SHEET 3 OF 6

DESIGN IE	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. SEE TITLE SHEET		HIGHWAY NO. FM 1378, ETC.
GRAPHICS IE	STATE TEXAS	DISTRICT DAL	COUNTY COLLIN	SHEET NO. 265
CHECK JI/IE	CONTROL 1392	SECTION 01	JOB 044, ETC.	



FILE: c:\txdot\pw\online\txdot5\ibrahim.e\saad\0326860\FM 1378 Stripping Layout.dgn

TIME: 3:45:18 PM

DATE: 2/13/2023



- LEGEND
- (A) (W) 6" (SLD) TY I
 - (B) (W) 6" (BRK) TY I
 - (C) (W) 8" (SLD) TY I
 - (D) (W) 24" (SLD) TY I
 - (E) (W) (ARROW) TY I
 - (F) (W) (WORD) TY I
 - (G) (W) 6" (SLD) TY II
 - (H) (W) 6" (BRK) TY II
 - (I) (W) 8" (SLD) TY II
 - (J) (W) 24" (SLD) TY II
 - (K) (W) (ARROW) TY II
 - (L) (W) (WORD) TY II
 - (M) (Y) 6" (SLD) TY I
 - (N) (Y) 6" (SLD) TY II
 - (O) (W) 6" (DOT) TY I
 - (P) (W) 6" (DOT) TY II
 - (Q) REFL PAV MRKR TY II-C-R
 - (R) PAV SURF PREP FOR MKR (6')
 - (S) PAV SURF PREP FOR MKR (8')
 - (T) PAV SURF PREP FOR MKR (24')
 - (U) PAV SURF PREP FOR ARROW
 - (V) PAV SURF PREP FOR WORD
 - (W) PAV SURF PREP FOR RPM
 - (X) INSTL OM ASSM (OM-22) (FLX) GND
 - (Y) REFL PAV MRKR TY II A-A
 - (Z) REFL PAV MRK TY I (W) 36" (YLD TRI)
 - (Z1) REFL PAV MRK TY II (W) 36" (YLD TRI)
 - (Z2) PAV SURF PREP FOR MKR (36") (YLD TRI)

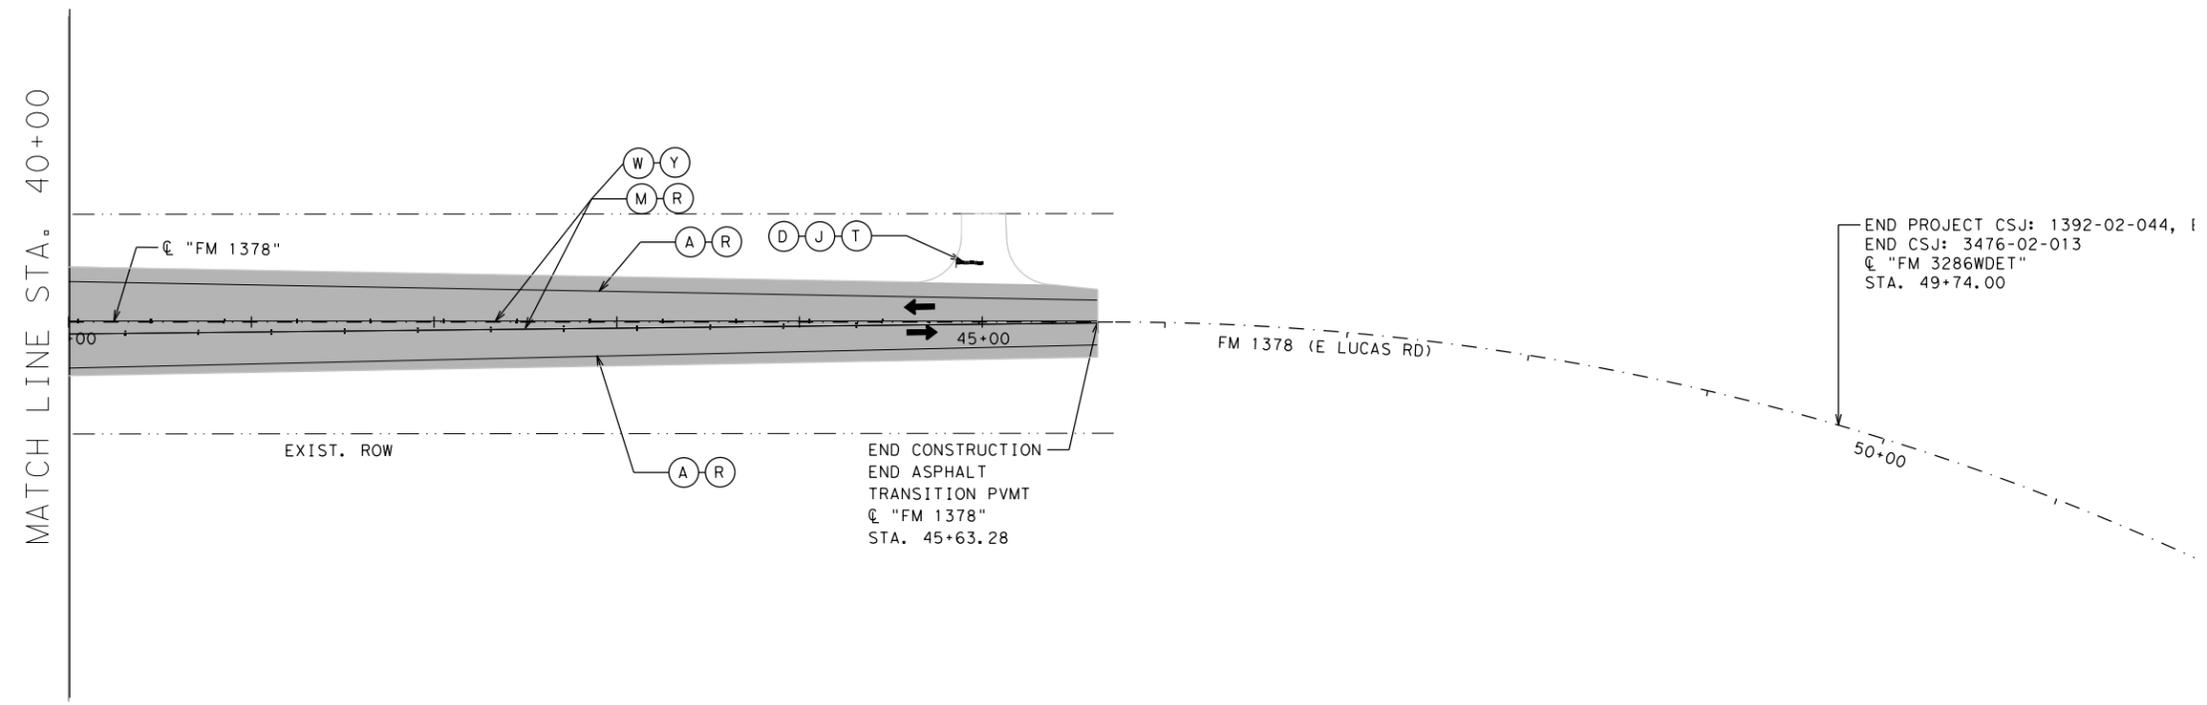

Abraham El Saad, P.E. 2-20-23
Signature of Registrant & Date



**FM 1378
AT FM 3286
PAVEMENT MARKINGS
LAYOUT**

SCALE: 1"=100' SHEET 4 OF 6

DESIGN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
IE	6	SEE TITLE SHEET		FM 1378, ETC.
GRAPHICS	IE	STATE	DISTRICT	COUNTY
CHECK	J/IE	TEXAS	DAL	COLLIN
CHECK	CHECK	CONTROL	SECTION	JOB
		1392	01	044, ETC.


266

LOCATION	666 6048	666 6309	666 6321	672 6009	678 6002	678 6008	678 6033
FM 1378 CSJ: 3476-02-013	REFL PAV MRK TY I (W) 24" (SLD) (100MIL)	RE PM W/RET REQ TY I (W) 6" (SLD) (100MIL)	RE PM W/RET REQ TY I (Y) 6" (SLD) (100MIL)	REFL PAV MRK TY II-A-A	PAV SURF PREP FOR MKR (6")	PAV SURF PREP FOR MKR (24")	PAV SURF PREP FOR MKR (RPM)
	LF	LF	LF	EA	LF	LF	EA
PROJECT TOTALS	15	1127	1127	49	2254	15	49

FILE: c:\txdot\pw\online\txdot5\ibrahim.e\saad\0326860\FM 1378 Striping Layout.dgn



TIME: 3:45:49 PM

DATE: 2/13/2023



- LEGEND
- (A) (W) 6" (SLD) TY I
 - (B) (W) 6" (BRK) TY I
 - (C) (W) 8" (SLD) TY I
 - (D) (W) 24" (SLD) TY I
 - (E) (W) (ARROW) TY I
 - (F) (W) (WORD) TY I
 - (G) (W) 6" (SLD) TY II
 - (H) (W) 6" (BRK) TY II
 - (I) (W) 8" (SLD) TY II
 - (J) (W) 24" (SLD) TY II
 - (K) (W) (ARROW) TY II
 - (L) (W) (WORD) TY II
 - (M) (Y) 6" (SLD) TY I
 - (N) (Y) 6" (SLD) TY II
 - (O) (W) 6" (DOT) TY I
 - (P) (W) 6" (DOT) TY II
 - (Q) REFL PAV MRKR TY II-C-R
 - (R) PAV SURF PREP FOR MKR (6")
 - (S) PAV SURF PREP FOR MKR (8")
 - (T) PAV SURF PREP FOR MKR (24")
 - (U) PAV SURF PREP FOR ARROW
 - (V) PAV SURF PREP FOR WORD
 - (W) PAV SURF PREP FOR RPM
 - (X) INSTL OM ASSM (OM-2Z) (FLX) GND
 - (Y) REFL PAV MRKR TY II A-A
 - (Z) REF PAV MRK TY I (W) 36" (YLD TRI)
 - (Z1) REFL PAV MRK TY II (W) 36" (YLD TRI)
 - (Z2) PAV SURF PREP FOR MRK (36") (YLD TRI)

END PROJECT CSJ: 1392-01-044, ETC.
 END CSJ: 1392-01-044
 CL "SOUTHVIEW1"
 STA. 89+95.00

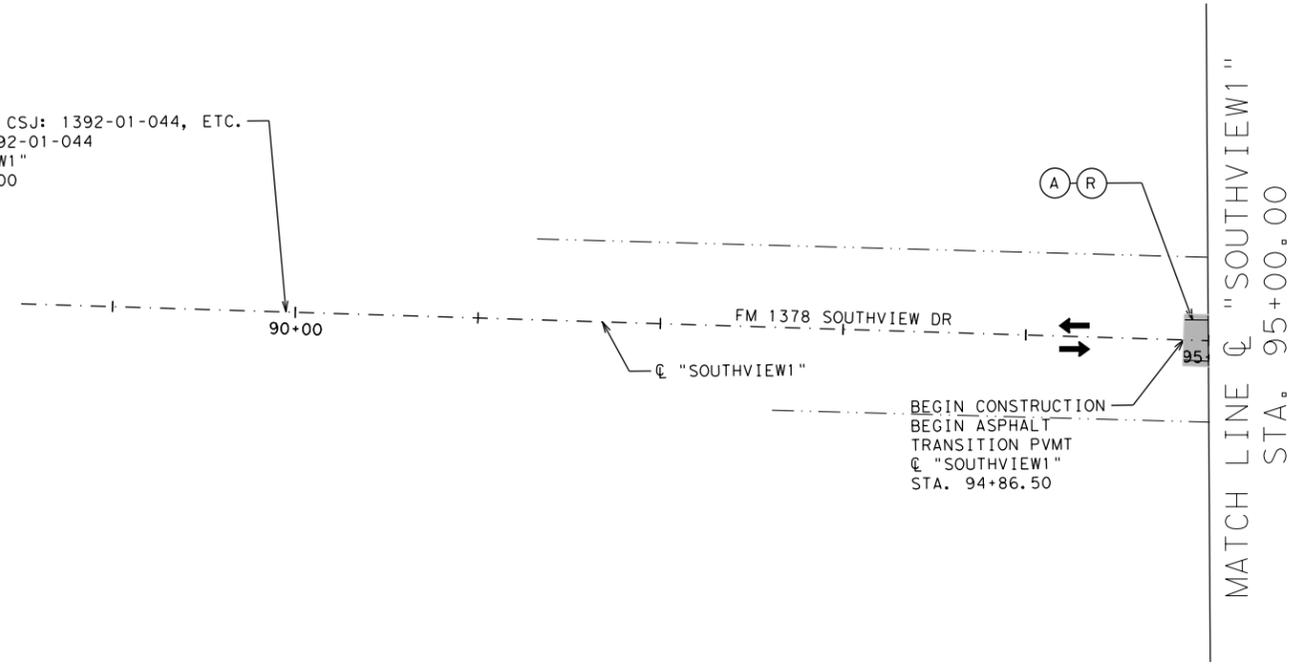

Abraham El Saad, P.E. 2-20-23
 Signature of Registrant & Date



FM 1378
 AT FM 3286
**PAVEMENT MARKINGS
 LAYOUT**

SCALE: 1"=100' SHEET 5 OF 6

DESIGN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
IE	6	SEE TITLE SHEET		FM 1378, ETC.
GRAPHICS	IE	STATE	DISTRICT	COUNTY
CHECK	J/I/E	TEXAS	DAL	COLLIN
CHECK	CHECK	CONTROL	SECTION	JOB
		1392	01	044, ETC.


267

LOCATION	666 6309	678 6002
FM 1378 CSJ: 1392-01-044	RE PM W/RET REQ TY I (W) 6" (SLD) (100MIL)	PAV SURF PREP FOR MRK (6")
	LF	LF
PROJECT TOTALS	28	28

FILE: c:\txdot\pw\onl\ine\txdot5\ibrahim.e\saad\0326860\FM 1378 Stripping Layout.dgn



TIME: 3:46:57 PM

DATE: 2/13/2023



LEGEND

- (A) (W) 6" (SLD) TY I
- (B) (W) 6" (BRK) TY I
- (C) (W) 8" (SLD) TY I
- (D) (W) 24" (SLD) TY I
- (E) (W) (ARROW) TY I
- (F) (W) (WORD) TY I
- (G) (W) 6" (SLD) TY II
- (H) (W) 6" (BRK) TY II
- (I) (W) 8" (SLD) TY II
- (J) (W) 24" (SLD) TY II
- (K) (W) (ARROW) TY II
- (L) (W) (WORD) TY II
- (M) (Y) 6" (SLD) TY I
- (N) (Y) 6" (SLD) TY II
- (O) (W) 6" (DOT) TY I
- (P) (W) 6" (DOT) TY II
- (Q) REFL PAV MRKR TY II-C-R
- (R) PAV SURF PREP FOR MKR (6")
- (S) PAV SURF PREP FOR MKR (8")
- (T) PAV SURF PREP FOR MKR (24")
- (U) PAV SURF PREP FOR ARROW
- (V) PAV SURF PREP FOR WORD
- (W) PAV SURF PREP FOR RPM
- (X) INSTL OM ASSM (OM-22) (FLX) GND
- (Y) REFL PAV MRKR TY II A-A
- (Z) REF PAV MRK TY I (W) 36" (YLD TRI)
- (Z1) REFL PAV MRK TY II (W) 36" (YLD TRI)
- (Z2) PAV SURF PREP FOR MKR (36") (YLD TRI)

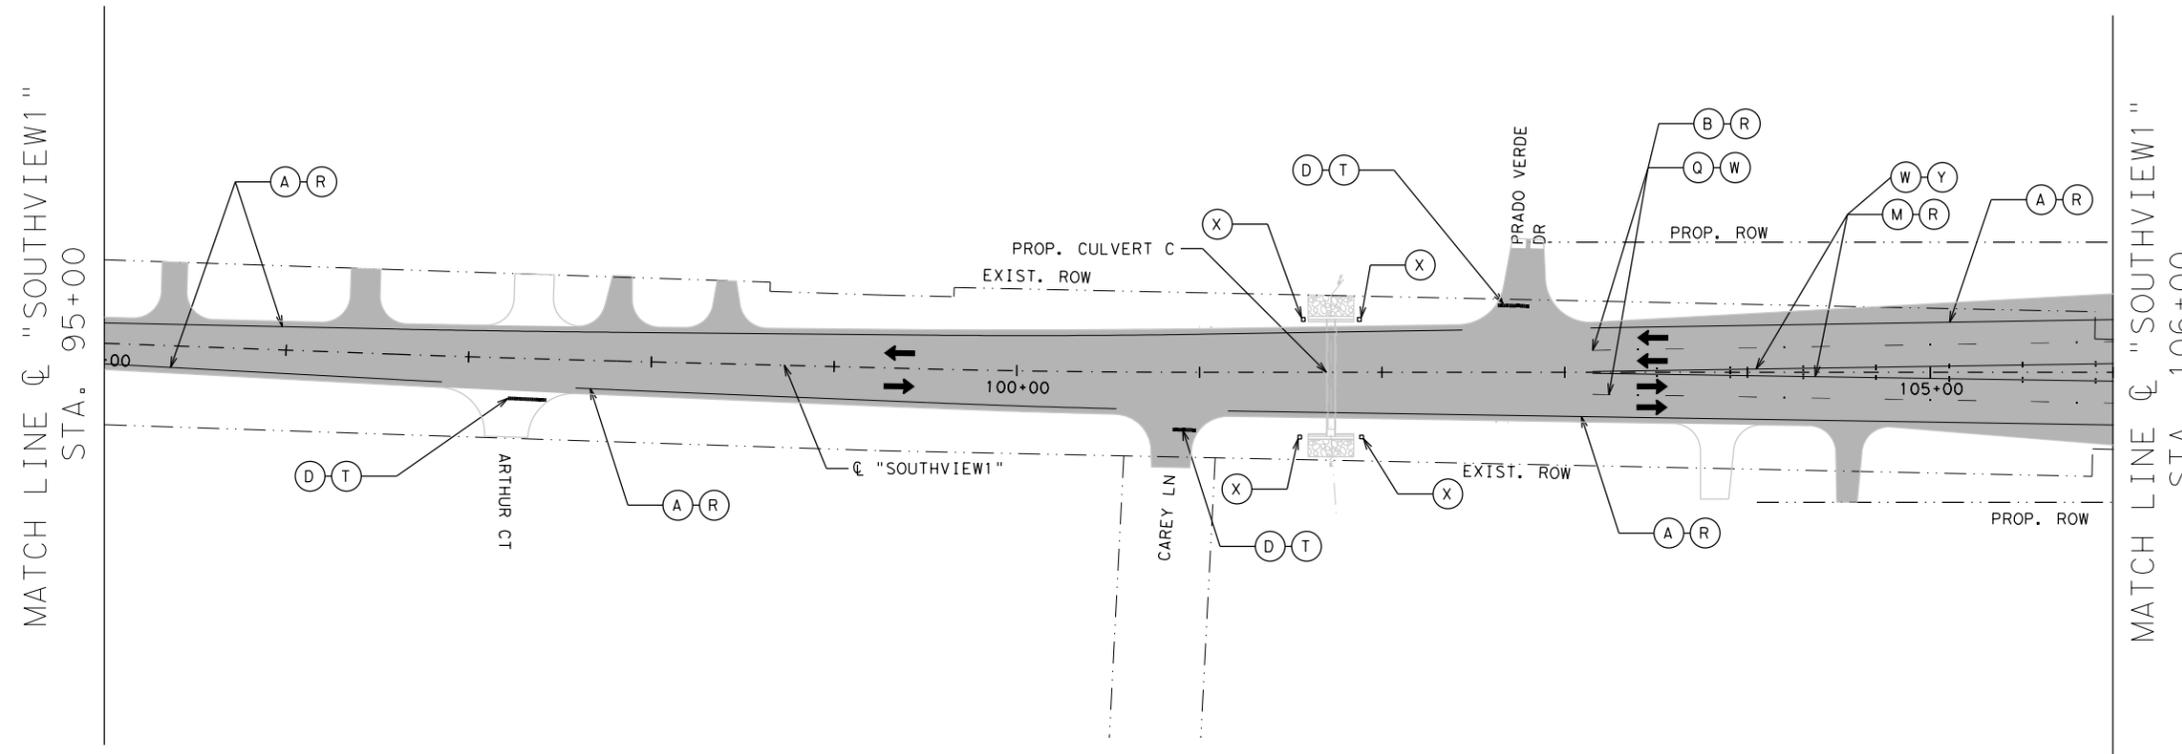

Abraham I. Saad, P.E. 2-20-23
Signature of Registrant & Date



**FM 1378
AT FM 3286
PAVEMENT MARKINGS
LAYOUT**

SCALE: 1"=100' SHEET 6 OF 6

DESIGN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
IE	6	SEE TITLE SHEET		FM 1378, ETC.
GRAPHICS	IE	STATE	DISTRICT	COUNTY
CHECK	J1/E	TEXAS	DAL	COLL IN
CHECK	CHECK	CONTROL	SECTION	JOB
		1392	01	044, ETC.

268

LOCATION	666 6048	666 6306	666 6309	666 6321	672 6010	672 6009	678 6002	678 6008	678 6033	658 6099
FM 1378 CSJ: 1392-01-044	REFL PAV MRK TY I (W) 24" (SLD) (100MIL)	RE PM W/RET REQ TY I (W) 6" (BRK) (100MIL)	RE PM W/RET REQ TY I (W) 6" (SLD) (100MIL)	RE PM W/RET REQ TY I (Y) 6" (SLD) (100MIL)	REFL PAV MRK TY II-C-R	REFL PAV MRK TY II-A-A	PAV SURF PREP FOR MKR (6")	PAV SURF PREP FOR MKR (24")	PAV SURF PREP FOR MKR (RPM)	INSTL DEL ASSM (OM-22) (FLX) GND
	LF	LF	LF	LF	EA	EA	LF	LF	EA	EA
PROJECT TOTALS	50	153	1992	570	8	34	2715	50	42	4

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

GENERAL NOTES FOR ALL ELECTRICAL WORK

1. The location of all conduits, junction boxes, ground boxes, and electrical services is diagrammatic and may be shifted to accommodate field conditions.
2. Provide new and unused materials. Ensure that all materials and installations comply with the applicable articles of the National Electrical Code (NEC), TxDOT standards and specifications, National Electrical Manufacturers Association (NEMA), and are listed by Underwriters Laboratories (UL) or a Nationally Recognized Testing Lab (NRTL). NRTLs such as Canadian Standard Association (CSA), Intertek Testing Services NA Inc., or FM Approvals LLC can be considered equivalent to UL. Where reference is made to NEMA listed devices, International Electrotechnical Commission (IEC) listed devices will not be considered an acceptable equal to a NEMA listed device. Acceptable devices may have both a NEMA and IEC listing. Faulty fabrication or poor workmanship in any material, equipment, or installation is justification for rejection. Replace or reinstall rejected material or equipment at no additional cost to the Department.
3. Miscellaneous nuts, bolts and hardware, except for high strength bolts, may be stainless steel when plans specify galvanized, provided the bolt size is 1/2 in. or less in diameter.
4. Provide the following test equipment as required by the Engineer to confirm compliance with the contract and the NEC: voltmeter, ammeter, megohm meter (1000 volt DC), ground resistance tester, torque wrenches, and torque screwdrivers. Ensure all equipment has been properly calibrated within the last year. Provide calibration certification to the Engineer upon request. Operate test equipment during inspection as requested by the Engineer.
5. Install grounding as shown on the plans and in accordance with the NEC. Ensure all metallic conduits; metal poles; luminaires; and metal enclosures are bonded to the equipment grounding conductor. Provide stranded bare copper or green insulated grounding conductors. Ground rods, connectors, and bonding jumpers are subsidiary to the various bid items.
6. When required by the Engineer, notify the Department in writing of materials from the Material Producers List (MPL) intended for use on each project. Prequalified materials are listed on the MPL on TxDOT's website under "Roadway Illumination and Electrical Supplies." No substitutions will be allowed for materials on this list.

CONDUIT

A. MATERIALS

1. Provide conduit, junction boxes, fittings, and hardware as per TxDOT Departmental Material Specification (DMS) 11030 "Conduit" and Item 618 "Conduit" of TxDOT's "Standard Specifications For Construction And Maintenance Of Highways, Streets, And Bridges," latest edition. Provide conduits listed under Item 618 on the MPL under "Roadway Illumination and Electrical Supplies." Provide conduit types according to the descriptive code or as shown on the plans. Do not substitute other types of conduits for those shown. Provide liquidtight flexible metal conduit (LFMC) when flexible conduit is called for on galvanized steel rigid metallic conduit (RMC) systems. Provide liquidtight flexible nonmetallic conduit (LFNC) when flexible conduit is called for on polyvinyl chloride (PVC) systems.
2. Provide galvanized steel RMC for all exposed conduits, unless otherwise shown on the plans. Properly bond all metal conduits.
3. Unless otherwise shown on the plans, provide junction boxes with a minimum size as shown in the following table, which applies to the greatest number of conductors entering the box through one conduit with no more than four conduits per box. When a mixture of conductor sizes is present, count the conductors as if all are of the larger size. For situations not applicable to the table, size junction boxes in accordance with NEC.

AWG	3 CONDUCTORS	5 CONDUCTORS	7 CONDUCTORS
#1	10" x 10" x 4"	12" x 12" x 4"	16" x 16" x 4"
#2	8" x 8" x 4"	10" x 10" x 4"	12" x 12" x 4"
#4	8" x 8" x 4"	10" x 10" x 4"	10" x 10" x 4"
#6	8" x 8" x 4"	8" x 8" x 4"	10" x 10" x 4"
#8	8" x 8" x 4"	8" x 8" x 4"	8" x 8" x 4"

4. Junction boxes with an internal volume of less than 100 cu. in. and supported by entering raceways must have threaded entries or hubs identified for the intended purpose and supported by connection of two or more rigid metal conduits. Secure conduit within 3 ft. of the enclosure or within 18 in. of the enclosure if all conduit entries are on the same side. Mechanically secure all junction boxes with an internal volume greater than 100 cu. inches.
5. Provide hot dipped galvanized cast iron or sand cast aluminum outlet boxes for junction boxes containing only 10 AWG or 12 AWG conductors. Do not use die cast aluminum boxes. Size outlet boxes according to the NEC.
6. Do not use intermediate metal conduit (IMC) or electrical metallic tubing (EMT) unless specifically required by the plan sheets. When EMT is called for, provide junction boxes made from galvanized steel sheeting, listed and approved for outdoor use, unless otherwise noted on the plans. Size all galvanized steel junction boxes in accordance with the NEC. Provide junction boxes for IMC conduit systems that meet the same requirements for junction boxes used with RMC systems.
7. Provide PVC junction boxes intended for outdoor use on PVC conduit systems, unless otherwise noted on the plans.

8. Provide PVC elbows in PVC conduit systems, unless otherwise shown on the plans. Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the PVC conduit system. When galvanized steel RMC elbows are specifically called for in the plans and any portion of the RMC elbow is buried less than 18 in., ground the RMC elbow by means of a grounding bushing on a rigid metal extension. Grounding of the rigid metal elbow is not required if the entire RMC elbow is encased in a minimum of 2 in. of concrete. PVC extensions are allowed on these concrete encased rigid metal elbows. RMC or PVC elbows are subsidiary to various bid items.
9. When required, provide High-Density Polyethylene (HDPE) conduit with factory installed internal conductors according to Item 622 "Duct Cable." At the Contractor's request and with approval by the Engineer, substitute HDPE conduit with no conductors for bored schedule 40 or schedule 80 PVC conduit bid under Item 618. Ensure bored HDPE substituted for PVC is schedule 40 and of the same size PVC called for in the plans. Ensure the substituted HDPE meets the requirements of Item 622, except that the conduit is supplied without factory-installed conductors. Make the transition of the HDPE conduit to PVC (or RMC elbow when required) at the bore pit. Provide conduit of the size and schedule as shown on the plans. Do not extend substituted conduit into ground boxes or foundations. Provide PVC or galvanized steel RMC elbows as called for at all ground boxes and foundations.
10. Use two-hole straps when supporting 2 in. and larger conduits. On electrical service poles, properly sized stainless steel or hot dipped galvanized one-hole standoff straps are allowed on the service riser conduit.

B. CONSTRUCTION METHODS

1. Provide and install expansion joint conduit fittings on all structure-mounted conduits at the structure's expansion joints to allow for movement of the conduit. In addition, provide and install expansion joint fittings on all continuous runs of galvanized steel RMC conduit externally exposed on structures such as bridges at maximum intervals of 150 ft. When requested by the project Engineer, supply manufacturer's specification sheet for expansion joint conduit fittings. Repair or replace expansion joint fittings that do not allow for movement at no additional cost to the Department. Provide the method of determining the amount of expansion to the Engineer upon request. Do not use LFMC or LFNC as a substitute for the required expansion conduit fittings.
2. Space all conduit supports at maximum intervals of 5 ft. Install conduit spacers when attaching metal conduit to surface of concrete structures. See "Conduit Mounting Options" on ED(2). Install conduit support within 3 ft. of all enclosures and conduit terminations.
3. Do not attach conduit supports directly to pre-stressed concrete beams except as shown specifically in the plans or as approved by the Engineer.
4. Unless otherwise shown on the plans, jack or bore conduit placed beneath existing roadways, driveways, sidewalks, or after the base or surfacing operation has begun. Backfill and compact the bore pits below the conduit per Item 476 "Jacking, Boring, or Tunneling Pipe or Box" prior to installing conduit or duct cable to prevent bending of the connections.
5. When placing conduit in the sub-grade of new roadways, backfill all trenches with excavated material unless otherwise noted on the plans. When placing conduit in the sub-base of new roadways, backfill all trenches with cement-stabilized base as per requirements of Items 110 "Excavation", 400 "Excavation and Backfill for Structures", 401 "Flowable Backfill", 402 "Trench Excavation Protection", and 403 "Temporary Special Shoring."
6. Provide and place warning tape approximately 10 in. above all trenched conduit as per Item 618.
7. During construction, temporarily cap or plug open ends of all conduit and raceways immediately after installation to prevent entry of dirt, debris and animals. Temporary caps constructed of durable duct tape are allowed. Tightly fix the tape to the conduit opening. Clean out the conduit and prove it clear in accordance with Item 618 prior to installing any conductors.
8. Ensure conduit entry into the top of any enclosure is waterproof by installing conduit sealing hubs or using boxes with threaded bosses. This includes surface mounted safety switches, meter cans, service enclosures, auxiliary enclosures and junction boxes. Grounding bushings on water tight sealing hubs are not required.
9. Fit the ends of all PVC conduit terminations with bushings or bell end fittings. Provide and install a grounding type bushing on all metal conduit terminations.
10. Install a bonding jumper from each grounding bushing to the nearest ground rod, grounding lug, or equipment grounding conductor. Ensure all bonding jumpers are the same size as the equipment grounding conductor. Bonding of conduit used as a casing under roadways for duct cable is not required, if the duct extends the full length through the casing.
11. At all electrical services, install a 6 AWG solid copper grounding electrode conductor.
12. Place conduits entering ground boxes so that the conduit openings are between 3 in. and 6 in. from the bottom of the box. See the ground box detail on sheet ED(4).
13. Seal ends of all conduits with duct seal, expandable foam, or by other methods approved by the Engineer. Seal conduit immediately after completion of conductor installation and pull tests. Do not use duct tape as a permanent conduit sealant. Do not use silicone caulk as a conduit sealant.
14. File smooth the cut ends of all mounting strut and conduit. Before installing, paint the field cut ends of all mounting strut and RMC (threaded or non-threaded) with zinc rich paint (94% or more zinc content) to alleviate overspray. Use zinc rich paint to touch up galvanized material as allowed under Item 445 "Galvanizing." Do not paint non-galvanized material with a zinc rich paint as an alternative for materials required to be galvanized.

			
<p>ELECTRICAL DETAILS CONDUITS & NOTES</p> <p>ED(1) - 14</p>			
FILE:	ed1-14.dgn	DWG:	CK:
© TxDOT	October 2014	CONT	SECT
REVISIONS	1392 01	JOB	HIGHWAY
		044, etc	FM 1378
	DIST	COUNTY	SHEET NO.
	18	COLLIN	269

ELECTRICAL CONDUCTORS

A. MATERIAL INFORMATION

1. Provide Type XHHW insulated conductors in accordance with Departmental Material Specification (DMS) 11040 "Conductors" and Item 620 "Electrical Conductors." Provide conductors as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies" Item 620. Color code insulated conductors in conformance with the NEC. Identify grounded (neutral) conductors with white insulation. Identify grounding conductors (ground wires) with green insulation or bare conductors. Identify ungrounded (hot) conductors with any color insulation except green, white, or gray. Keep color scheme consistent throughout the wiring system. Identify conductors 6 American Wire Gauge (AWG) and smaller by continuous color jacket. Identify electrical conductors 4 AWG and larger by continuous color jacket or by colored tape. When identifying conductors with colored tape, mark at least 6 in. of the conductor's insulation with half laps of tape.
2. Provide a solid copper 6 AWG grounding electrode conductor to bond the electrical service equipment to the concrete encased grounding electrode or the ground rod at the service location. Connect the grounding electrode conductor to the ground rod with a UL listed connector in accordance with DMS 11040. Connect the grounding electrode conductor to the concrete encased grounding electrode as shown in the plans.
3. Where two or more circuits are present in one conduit or enclosure, permanently identify the conductors of each branch circuit by attaching a non-metallic tag around both circuit conductors at each accessible location. Provide tags with two straps, large enough to indicate circuit number, letter, or other identification as shown in the plans. Print circuit identification on the tag with a permanent marker.
4. Use listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors for splicing as specified in DMS 11040. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Provide UL listed gel-filled insulating splice covers. Splicing materials, insulating materials, breakaway disconnects, splice covers, and fuse holders are subsidiary to various bid items.

B. CONSTRUCTION METHODS

1. Use only a flat, high tensile strength polyester fiber pull tape for pulling conductors through the conduit system. After installing conductors in conduit, perform conductor pull test. If a conductor cannot be freely pulled, make any needed alterations or repairs at no additional cost to the department. Perform insulation resistance tests in accordance with Item 620. Coordinate with the Engineer to witness the tests.
2. Leave 2 ft. minimum, 3 ft. maximum length for each conductor up to the splice in ground boxes. Leave 3 ft. minimum, 4 ft. maximum length of conductor in ground boxes when pulled through with no splice. Leave 1 ft. minimum, 1.5 ft. maximum length of conductor at enclosures, weatherheads and pole bases.
3. Make splices only in junction boxes, ground boxes, pole bases, or electrical enclosures and use only listed compression or screw type pressure connectors, terminal blocks, or split bolt connectors. Insulate splices with heavy wall heat shrink tubing or gel-filled insulating splice covers to provide a watertight splice. Overlap conductor insulation with heat shrink tubing a minimum of 2 in. past both sides of the splice. Where heat shrink tubing may not shrink sufficiently to provide a watertight seal around the individual conductors, prior to heating the tubing, increase the diameter of the conductor insulation using hot melt adhesive tape to provide a watertight seal between the individual conductors and the heat shrink tubing. Ensure the tape extends past the heat shrink tubing. Use hot melt adhesive tape to fill the gap and seal the ends of heat shrink tubing. Heat shrink tubing that appears to have been burned, or overheated, is considered defective and must be replaced.
4. Size and install gel-filled insulating splice covers according to manufacturer's specifications when used in place of heat shrink tubing.
5. Wire nuts with factory applied waterproof sealant may be used for 8 AWG or smaller conductors in above ground junction boxes, but not in pole bases or ground boxes. Install wire nuts in an upright position to prevent the accumulation of water.
6. Support conductors in illumination poles with a J-hook at the top of the pole.
7. When terminating conductors, remove the insulation and jacketing material without nicking the individual strands of the conductor. Conductors with nicked individual conductor strands or removed strands will be considered damaged.
8. Replace conductors and cables that are damaged beyond repair or that fail an insulation resistance test at no additional cost to the department.
9. Do not repair damaged conductors with duct tape, electrical tape, or wire nuts. Use only approved splicing methods.
10. Do not terminate more than one conductor under a single connector, unless the connector is rated for multiple conductors. Do not exceed the pressure connector's listing for maximum number and size of conductors allowed.
11. Install breakaway connectors on conductors bid under Item 620 whenever those conductors pass through a breakaway support device. Follow manufacturer's instructions when terminating conductors to breakaway connectors. Properly torque threaded connections. Proper terminations are critical to the safe operation of breakaway devices. Trim waterproofing boots on breakaway connectors to fit snugly around the conductor to ensure waterproof connection. Only one conductor may enter a single opening in a boot. Provide waterproof boots with the correct number of openings. Leave unused openings factory sealed. Use prequalified breakaway connectors as shown on the MPL.

12. Provide and install a separate stranded equipment grounding conductor (EGC) in all conduits that contain circuit wiring of 50 volts or more. Unless shown elsewhere, size the EGC to be the same size as the largest current carrying conductor contained in the conduit. Ensure all EGCs are bonded together at every accessible location. For traffic signal installations, provide a minimum size 8 AWG EGC. The EGC is paid for under Item 620.

C. TEMPORARY WIRING

1. Install temporary conductors and electrical equipment in accordance with the NEC article "Temporary Installations" and Department standard sheets.
2. Provide a ground fault circuit interrupter (GFCI) for power outlets for portable electrical equipment, power tools, ice machines, ice storage bins and refrigerators located outdoors at grade. GFCI may be any one of the following: molded cord and plug set, receptacle, or circuit breaker type.
3. Use listed wire nuts with factory applied sealant for temporary wiring where approved.
4. Enclose conductor splices within a listed enclosure or ground box, or ensure the splices are more than 10 ft. above grade vertically and more than 5 ft. horizontally from any metal structure. Where installing temporary conductors in areas subject to vehicle traffic or mobile construction equipment, ensure the vertical clearance to ground is at least 18 ft. when measured at the lowest point. Ground messenger wires that support power conductors in conformance with the NEC.
5. Protect and when necessary repair any existing electrical conduits uncovered during the construction process in a timely manner and in conformance with the NEC.


GROUND RODS & GROUNDING ELECTRODES

A. MATERIAL INFORMATION


1. Provide and install a grounding electrode at electrical services. Provide ground rods according to DMS 11040 and the plans. Larger diameter or longer length rods may be called for in some specific locations, see the individual plans sheets. Concrete encased grounding electrodes may be called for in specific locations including electrical service, see individual plan sheets.

B. CONSTRUCTION METHODS


1. Furnish auxiliary ground rods for lightning protection and install in soil, concrete, or both, as called for in the plans. For ground rods installed in concrete, ensure the connection of the conductor to the ground rod is readily accessible for inspection or repairs. For ground rods installed in soil, ensure that the upper end is between 2 to 4 in. below finished grade.
2. Do not place ground rods in the same drilled hole as a timber pole.
3. Install ground rods so the imprinted part number is at the upper end of the rod.
4. Remove all non-conductive coatings such as concrete splatter from the rod at the clamp location.
5. Route all conductors as short and straight as possible for connection to lightning protection ground rods. When a bend is required, ensure a minimum radius bend of four inches for these conductors.
6. Unless otherwise called for in the plans, protect grounding electrode conductors with non-metallic conduit. When protecting grounding electrode conductors with metal conduit, provide and install a grounding type bushing and properly sized bonding jumper on each end of the metal conduit.
7. Written authorization is required before installing a ground rod in a horizontal trench for rocky soil or a solid rock bottom.

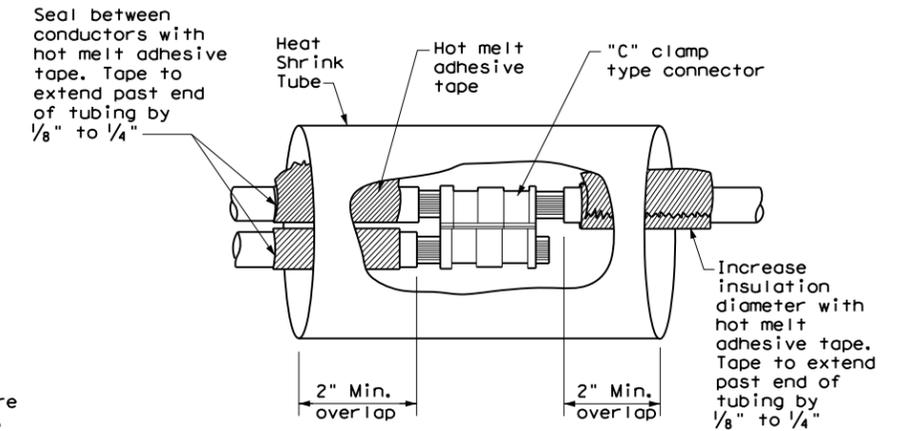

**SPLICE OPTION 1
Compression Type**

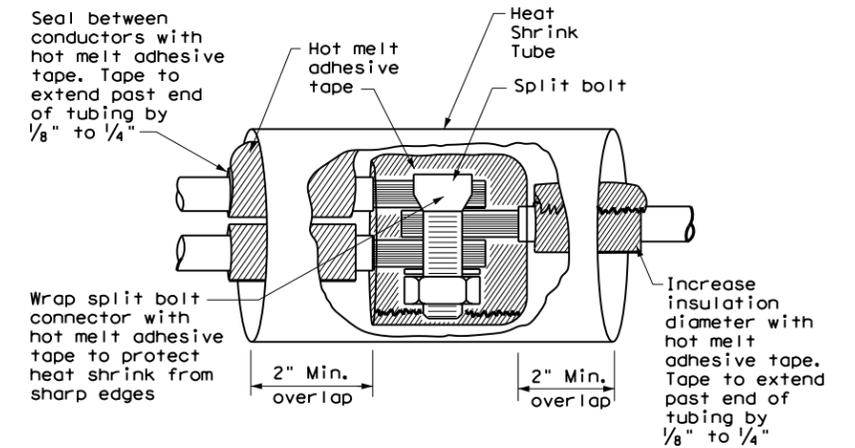

**SPLICE OPTION 2
Split Bolt Type**

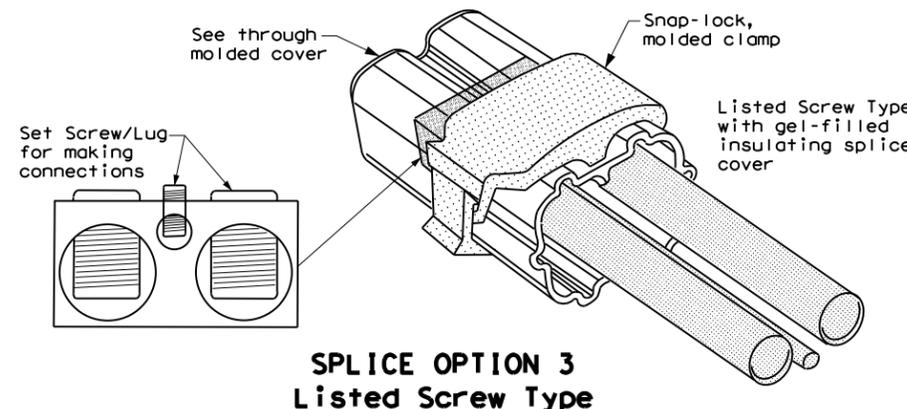

**SPLICE OPTION 3
Listed Screw Type**


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

		Texas Department of Transportation		Traffic Operations Division Standard	
<h1>ELECTRICAL DETAILS CONDUCTORS</h1>					
<h2>ED(3) - 14</h2>					
FILE:	ed3-14.dgn	DN:	TxDOT	CK:	TxDOT
© TxDOT	October 2014	CONT:	SECT	JOB:	HIGHWAY
REVISIONS		1392	01	044 ,etc	fm 1378
DIST:	18	COUNTY:	COLLIN	SHEET NO. 270	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

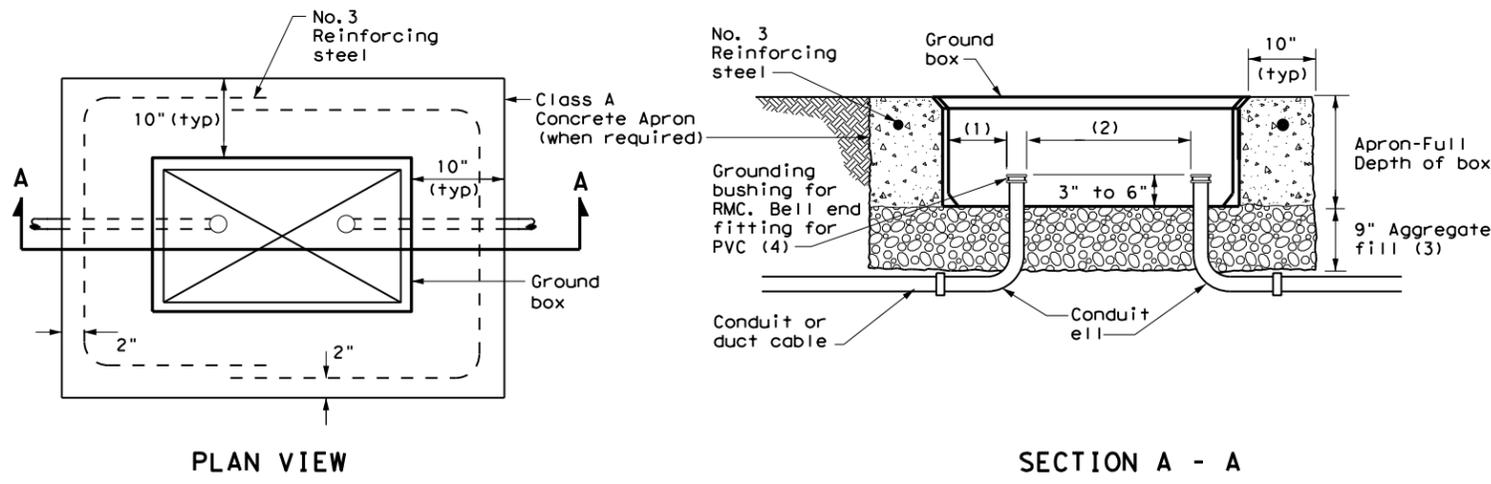


APRON FOR GROUND BOX

- (1) Uniformly space ends of conduits within the ground box. Position ends of conduits so that ground box walls do not interfere with the installation of grounding bushings or bell end fittings.
- (2) Maintain sufficient space between conduits to allow for proper installation of bushing.
- (3) Place aggregate under the box, not in the box. Aggregate should not encroach on the interior volume of the box.
- (4) Install a grounding bushing on the upper end of all RMC terminating in a ground box. Ground RMC elbows when any part of the elbow is less than 18 in. below the bottom of the ground box. Install a PVC bushing or bell end fitting on the upper end of all PVC conduits terminating in a ground box.

GROUND BOX DIMENSIONS	
TYPE	OUTSIDE DIMENSIONS (INCHES) (Width x Length X Depth)
A	12 X 23 X 11
B	12 X 23 X 22
C	16 X 29 X 11
D	16 X 29 X 22
E	12 X 23 X 17

GROUND BOX COVER DIMENSIONS								
TYPE	DIMENSIONS (INCHES)							
	H	I	J	K	L	M	N	P
A, B & E	23 1/4	23	13 3/4	13 1/2	9 7/8	5 1/8	1 3/8	2
C & D	30 1/2	30 1/4	17 1/2	17 1/4	13 1/4	6 3/4	1 3/8	2

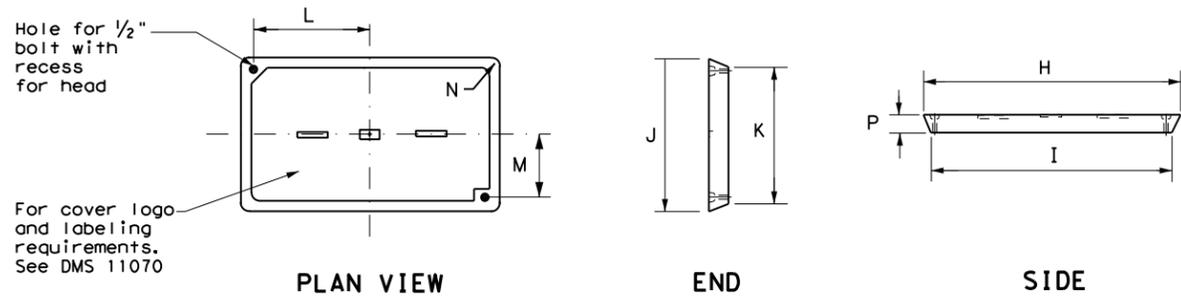

GROUND BOX COVER

GROUND BOXES

A. MATERIALS

1. Provide polymer concrete ground boxes measuring 16x30x24 in. (WxLxD) or smaller in accordance with Departmental Material Specification (DMS) 11070 "Ground Boxes" and Item 624 "Ground Boxes."
2. Provide Type A, B, C, D, and E ground boxes as shown in the plans, and as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies," Item 624.
3. Ensure ground box cover is correctly labeled in accordance with DMS 11070.
4. Provide larger ground boxes in accordance with Item 624 and as shown in the plans.

B. CONSTRUCTION METHODS

1. Remove all gravel and dirt from conduit. Cap all conduits prior to placing aggregate and setting ground box. Provide Grade 3 or 4 coarse aggregate as shown on Table 2 of Item 302 "Aggregates for Surface Treatments." Ensure aggregate bed is in place and at least 9 inches deep, prior to setting the ground box. Install ground box on top of aggregate.
2. Cast ground box aprons in place. Reinforcing steel may be field bent. Ensure the depth of concrete for the apron extends from finished grade to the top of the aggregate bed under the box. Ground box aprons, including concrete and reinforcing steel, are subsidiary to ground boxes when called for by descriptive code.
3. Keep bolt holes in the box clear of dirt. Bolt covers down when not working in ground boxes.
4. Install all conduits and ells in a neat and workmanlike manner. Uniformly space conduits so grounding bushings and bell end fittings can easily be installed.
5. Temporarily seal all conduits in the ground box until conductors are installed.
6. Permanently seal conduits immediately after the completion of conductor installation and pull tests. Permanently seal the ends of all conduits with duct seal, expandable foam, or other method as approved. Do not use duct tape as a permanent conduit sealant. Do not use silicone caulk as a sealant.
7. When a ground rod is present in a ground box, bond all equipment grounding conductors together and to the ground rod with listed connectors.
8. When a type B or D ground box is stacked to meet volume requirements, it is allowable to cut an appropriately sized hole for conduit entry in the side wall at least 18 inches below grade.
9. If an existing ground box in the contract has a metal cover, bond the cover to the equipment grounding conductor with a 3 ft. long stranded bonding jumper the same size as the grounding conductor. The bonding jumper is subsidiary to various bid items. Verify existing ground boxes with metal covers are shown on the plans, with notes fully describing the work required.
10. If other ground boxes with metal covers are within the project limits but are not part of the contract, the Engineer may direct the Contractor to bond the metal covers, identifying the specific boxes in writing. This work will be paid for separately.
11. Bond metal ground box covers to the grounding conductor with a tank ground type lug.

				Traffic Operations Division Standard	
<h2>ELECTRICAL DETAILS</h2> <h3>GROUND BOXES</h3> <h4>ED(4) - 14</h4>					
FILE:	ed4-14.dgn	DN:	TxDOT	CK:	TxDOT
© TxDOT	October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS		1392	01	044, etc	FM 1378
DIST	COUNTY	SHEET NO.			
18	COLLIN	271			

ELECTRICAL SERVICES NOTES

- Provide new materials. Ensure installation and materials comply with the applicable provisions of the National Electrical Code (NEC) and National Electrical Manufacturers Association (NEMA) standards. Ensure material is Underwriters Laboratories (UL) listed. Provide and install electrical service conduits, conductors, disconnects, contactors, circuit breaker panels, and branch circuit breakers as shown on the Electrical Service Data chart in the plans. Faulty fabrication or poor workmanship in material, equipment, or installation is justification for rejection. Where manufacturers provide warranties and guarantees as a customary trade practice, furnish these to the State.
- Provide electrical services in accordance with Electrical Details standard sheets, Departmental Material Specification (DMS) 11080 "Electrical Services," DMS 11081 "Electrical Services-Type A," DMS 11082 "Electrical Services-Type C," DMS 11083 "Electrical Services-Type D," DMS 11084 "Electrical Services-Type T," DMS 11085 "Electrical Services-Pedestal (PS)", and Item 628 "Electrical Services" of the Standard Specifications. Provide electrical service types A, C, and D, as listed on the Material Producers List (MPL) on the Department web site under "Roadway Illumination and Electrical Supplies," Item 628. Provide other service types as detailed on the plans.
- Provide all work, materials, services, and any incidentals needed to install a complete electrical service as specified in the plans.
- Coordinate with the Engineer and the utility provider for metering and compliance with utility requirements. Primary line extensions, connection charges, meter charges, and other charges by the utility company to provide power to the location are paid for in accordance with Item 628. Get approval for the costs associated with these charges prior to engaging the utility company to do the work. Consult with the utility provider to determine costs and requirements, and coordinate the work as approved.
- The enclosure manufacturer will provide Master Lock Type 2 with brass tumblers keyed #2195 for all custom electrical enclosures. Installing Contractor is to provide Master Lock #2195 Type 2 with brass tumblers for "off the shelf" enclosures. Master Lock #2195 keys and locks become property of the State. Unless otherwise approved, do not energize electrical service equipment until locks are installed.
- Enclosures with external disconnects that de-energize all equipment inside the enclosure do not need a dead front trim. Protect incoming line terminations from incidental contact as required by the NEC.
- When galvanized is specified for nuts, screws, bolts or miscellaneous hardware, stainless steel may be used.
- Provide wiring and electrical components rated for 75°C. Provide red, black, and white colored XHHW service entrance conductors of minimum size 6 American Wire Gauge (AWG). Identify size 6 AWG conductors by continuous color jacket. Identify electrical conductors sized 4 AWG and larger by continuous color jacket or by colored tape. Mark at least 6 inches of the conductor's insulation with half laps of colored tape, when identifying conductors. Ensure each service entrance conductor exits through a separately bushed non-metallic opening in the weatherhead. The lengths of the conductors outside the weatherhead are to be 12 inches minimum, 18 inches maximum, or as required by utility.
- All electrical service conduit and conductors attached to the electrical service including the riser or the elbow below ground are subsidiary to the electrical service. For an underground utility feed, all service conduit and conductors after the elbow, including service conduit and conductors for the utility pole riser when furnished by the Contractor, will be paid for separately.
- Provide rigid metal conduit (RMC) for all conduits on service, except for the 1/2 in. PVC conduit containing the electrical service grounding electrode conductor. Size the service entrance conduit as shown in the plans. Ensure conduit for branch circuit entry to enclosure is the same size as that shown on the layout sheets for branch circuit conduit. Extend all rigid metal conduits a minimum of 6 inches underground and then couple to the type and schedule of the conduit shown on the layout for that particular branch circuit. Install a grounding bushing on the RMC where it terminates in the service enclosure.
- Use of liquidtight flexible metal conduit (LFMC) is allowed between the meter and service enclosure when they are mounted 90 to 180 degrees to each other. Size the LFMC the same size as service entrance conduit. LFMC must not exceed 3 feet in length. Strap LFMC within 1 foot of each end. LFMC less than 12 inches in length need not be strapped. Each end of LFMC must have a grounding bushing or be terminated with a grounding fitting. The LFMC must contain a grounded (neutral) conductor. Ensure any bend in LFMC never exceeds 180 degrees. A pull test is required on all installed conductors, with at least six inches of free conductor movement demonstrated to the satisfaction of the Engineer.
- Ensure all mounting hardware and installation details of services conform to utility company specifications.
- For all electrical service enclosures listed under Item 628 on the MPL, the UL 508 enclosure manufacturers will prepare and submit a schematic drawing unique to each service. Before shipment to the job site, place the applicable laminated schematic drawings and the laminated plan sheet showing the electrical service data chart used to build the enclosure in the enclosure's data pocket. The installing contractor will copy and laminate the actual project plan sheets detailing all equipment and branch circuits supplied by that service. The laminated plan sheets are to be placed in the service enclosure's document pocket. Reduce 11 in. x 17 in. plan sheets to 8 1/2 in. x 11 in. before laminating. If the installation differs from the plan sheets, the installing contractor is to redline plan sheets before laminating.
- When providing an "Off The Shelf" Type D or Type T service, provide laminated plan sheets detailing equipment and branch circuits supplied by that service. Reduce 11 in. x 17 in. plan sheets to 8 1/2 in. x 11 in. before laminating. Deliver these drawings before completion of the work to the Engineer, instead of placing in enclosure that has no door pocket.
- Do not install conduit in the back wall of a service enclosure where it would penetrate the equipment mounting panel inside the enclosure. Provide grounding bushings on all metal conduits, and terminate bonding jumpers to grounding bus. Grounding bushings are not required when the end of the metal conduit is fitted with a conduit sealing hub or threaded boss, such as a meter base hub.

SERVICE ASSEMBLY ENCLOSURE

- Provide threaded hub for all conduit entries into the top of enclosure.
- Type galvanized steel (GS) enclosures may be used for Type C panelboards and for Type D and T services that do not use an enclosure mounted photoceII or lighting contactor. Provide GS enclosures in accordance with DMS 11080, 11082, 11083, and 11084.
- Provide aluminum (AL) and stainless steel (SS) enclosures for Types A, C, and D in accordance with DMS 11080, 11081, 11082, 11083, and 11084. Do not paint stainless steel.
- Provide pedestal service (PS) enclosures in accordance with ED(9) and DMS 11080 and 11085. Do not provide GS pedestal services. If GS is shown in the PS descriptive code, provide an AL enclosure.

MAIN DISCONNECT & BRANCH CIRCUIT BREAKERS

- Field drill flange-mounted remote operator handle if needed, to ensure handle is lockable in both the "On" and "Off" positions.
- When the utility company provides a transformer larger than 50 KVA, verify that the available fault current is less than the circuit breaker's ampere interrupting capacity (AIC) rating and provide documentation from the electric utility provider to the Engineer.



PHOTOELECTRIC CONTROL

- Provide photocell as listed on the MPL. Move, adjust, or shield the photocell from stray or ambient night time light to ensure proper operation. Mount photocell facing north when practical. Mount top of pole photocells as shown on Top Mounted Photocell Detail.

* ELECTRICAL SERVICE DATA												
Elec. Service ID	Plan Sheet Number	Electrical Service Description	Service Conduit *xSize	Service Conductors No./Size	Safety Switch Amps	Main Ckt. Bkr. Pole/Amps	Two-Pole Contractor Amps	Panelbd/ Loadcenter Amp Rating	Branch Circuit ID	Branch Ckt. Bkr. Pole/Amps	Branch Circuit Amps	KVA Load
SB 183	289	ELC SRV TY A 240/480 100(SS)AL(E)SF(U)	2"	3/#2	100	2P/100	100	N/A	Lighting NB	2P/40	26	28.1
									Lighting SB	2P/40	25	
									Underpass	1P/20	15	
NB Access	30	ELC SRV TY D 120/240 060(NS)SS(E)TS(O)	1 1/4"	3/#6	N/A	2P/60		100	Sig. Controller	1P/30	23	5.3
							30		Luminaires	2P/20	9	
									CCTV	1P/20	3	
2nd & Main	58	ELC SRV TY T 120/240 000(NS)GS(N)SP(O)	1 1/4"	3/#6	N/A	N/A	N/A	70	Flashing Beacon 1	1P/20	4	1.0
									Flashing Beacon 2	1P/20	4	

* Example only, not for construction. All new electrical services must have electrical service data chart specific to that service as shown in the plans.
 ** Verify service conduit size with utility. Size may change due to utility meter requirements. Ensure conduit size meets the National Electrical Code.

EXPLANATION OF ELECTRICAL SERVICE DESCRIPTIVE CODE

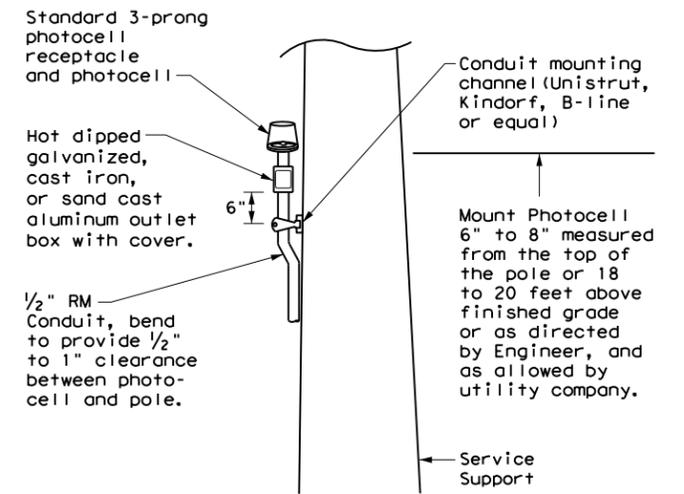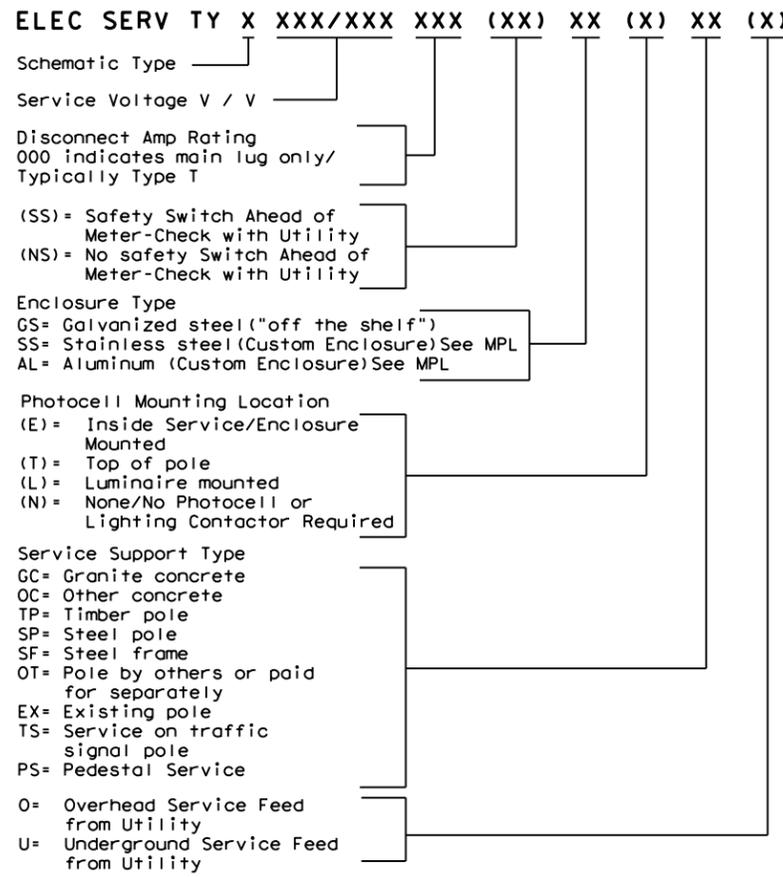

TOP MOUNTED PHOTOCELL

Install conduit strap maximum 3 feet from box. 5 foot maximum spacing between straps supporting conduit.

Texas Department of Transportation Traffic Operations Division Standard


ELECTRICAL DETAILS SERVICE NOTES & DATA

ED(5) - 14


FILE: ed5-14.dgn	DWG: TxDOT	CHK: TxDOT	DWG: TxDOT	CHK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392 01		044 ,etc	FM 1378
	DIST		COUNTY	SHEET NO.
	18		COLLIN	272

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

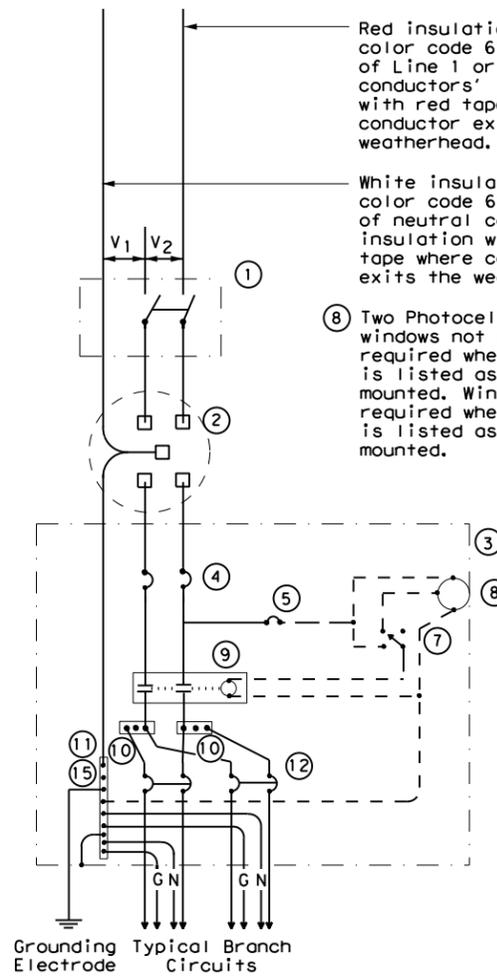


**SCHEMATIC TYPE A
THREE WIRE**

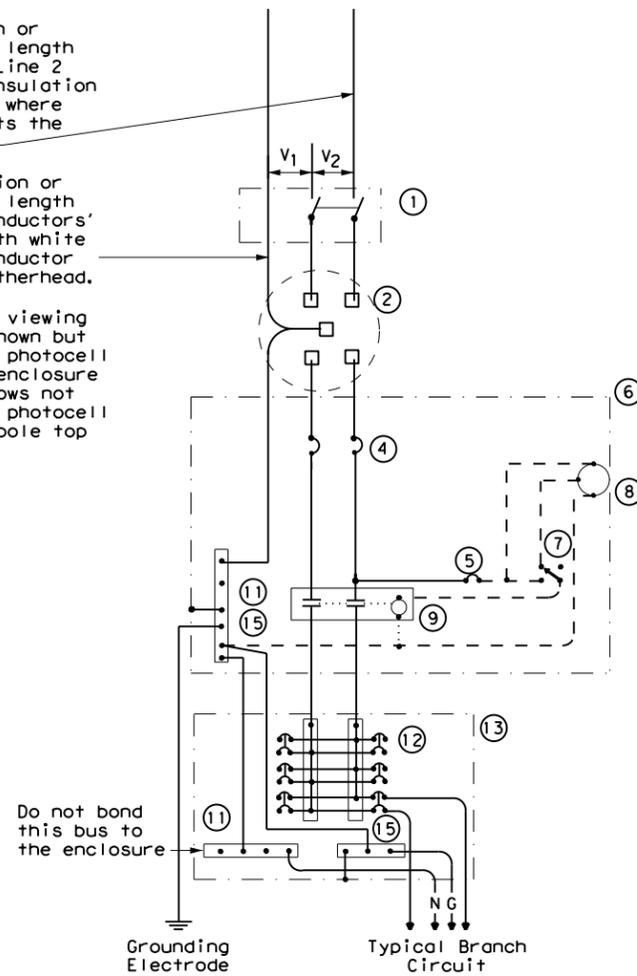

**SCHEMATIC TYPE C
THREE WIRE**

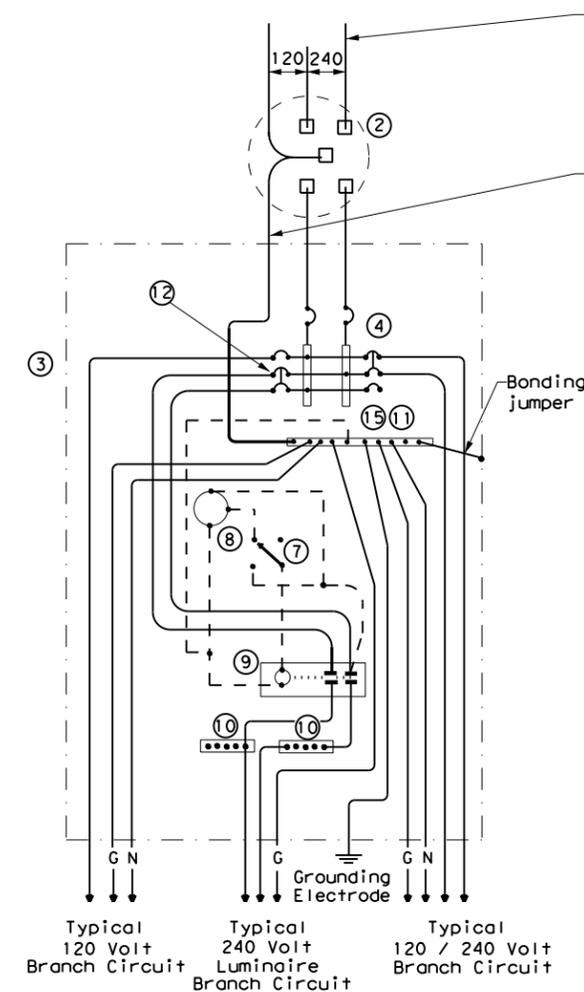

**SCHEMATIC TYPE D - CUSTOM
120/240 VOLTS - THREE WIRE**

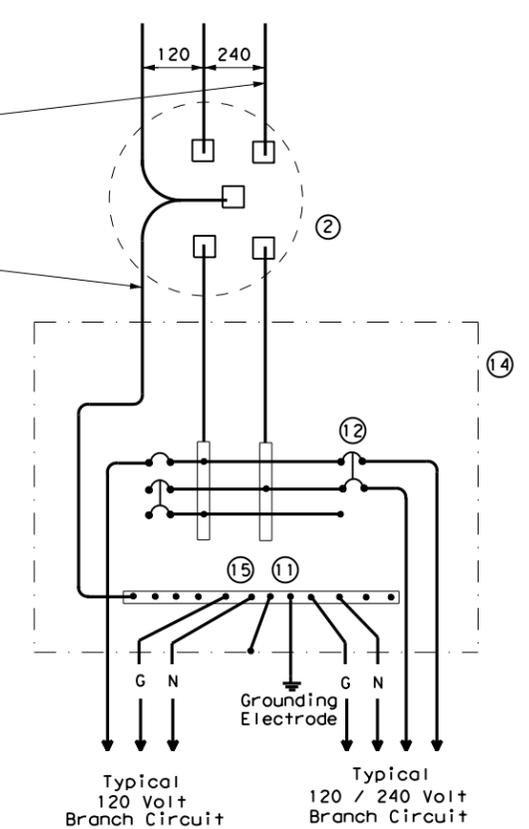

**SCHEMATIC TYPE T
120/240 VOLTS - THREE WIRE**
Galvanized steel - "Buy Off The Shelf" only. When required install photocell top of the pole or on luminaire only, no lighting contractor will be installed.

WIRING LEGEND	
————	Power Wiring
- - - -	Control Wiring
—N—	Neutral Conductor
—G—	Equipment grounding conductor-always required

SCHEMATIC LEGEND	
1	Safety Switch (when required)
2	Meter (when required-verify with electric utility provider)
3	Service Assembly Enclosure
4	Main Disconnect Breaker (See Electrical Service Data)
5	Circuit Breaker, 15 Amp (Control Circuit)
6	Auxiliary Enclosure
7	Control Station ("H-O-A" Switch)
8	Photo Electric Control (enclosure-mounted shown)
9	Lighting Contactor
10	Power Distribution Terminal Blocks
11	Neutral Bus
12	Branch Circuit Breaker (See Electrical Service Data)
13	Separate Circuit Breaker Panelboard
14	Load Center
15	Ground Bus



		Traffic Operations Division Standard	
ELECTRICAL DETAILS SERVICE ENCLOSURE AND NOTES			
ED(6) - 14			
FILE: ed6-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT October 2014	CONT	SECT	JOB
REVISIONS	1392	01	044 .etc
	DIST	COUNTY	SHEET NO.
	0392	COLLIN	273

DATE:
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

TRAFFIC SIGNAL NOTES

1. Do not pass luminaire conductors through the signal controller cabinet.
2. Include an equipment grounding conductor in all conduits throughout the electrical system. Bond all exposed metal parts to the grounding conductor.
3. Provide roadway luminaires, when required, in accordance with the material and construction sections of Item 610, "Roadway Illumination Assemblies," except for performance testing of luminaires. Test installed roadway luminaires for proper operation as a part of the associated traffic signal system test.
4. If internally illuminated street name signs are approved for use, ground the fixture to the pole with a 12 AWG green XHHW conductor.
5. Bond anchor bolts to rebar cage in two locations using #3 bars or 6 AWG stranded copper conductors. Use listed mechanical connectors rated for embedment in concrete. See TxDOT standard TS-FD for further details.
6. Drill and tap signal poles for 1/2 in. X 13 UNC tank ground fitting. Provide and install tank ground fitting 4 in. to 6 in. directly below electrical service enclosure. Provide properly sized hole through the bottom of the enclosure for the service grounding electrode conductor. Connect the electrical service grounding electrode conductor to the tank ground fitting. Ensure electrical service grounding electrode conductor is as short and straight as possible from the enclosure to the tank ground fitting. See Inset A detail for further information. Size service entrance conduit and branch circuit conduit as shown in the plans.
7. Mount electrical service enclosure and meter to signal pole with stainless steel bands. Ensure bands are a minimum width of 3/4 in. Secure enclosures to bands using two-bolt brackets. Install brackets near top and bottom of each enclosure. Install properly sized stainless steel washers on each bolt in the enclosure. Band or drill and tap properly sized stand-off straps to signal pole for attaching conduit.
8. Conduct pull tests and insulation resistance tests on all illumination and power conductors as required in Item 620 "Electrical Conductors" and ED(3). To prevent electronics damage, do not conduct insulation resistance tests on traffic signal cables after termination.
9. Lock all enclosures and bolt down all ground box covers before applying power to the signal installation.
10. Terminate conduits entering the top of enclosures with a conduit-sealing hub or threaded boss such as meter hub. Install a grounding bushing on all metal conduits not connected to conduit-sealing hub or threaded boss. Bond the grounding bushing to the ground bus with a bonding jumper. Seal all conduits entering enclosures with duct seal or expanding foam. Do not use silicone to seal conduit ends.
11. For all conduits, ensure the burial depth is a minimum of 18". Ensure the minimum burial depth for conduit placed under a roadway is 24".

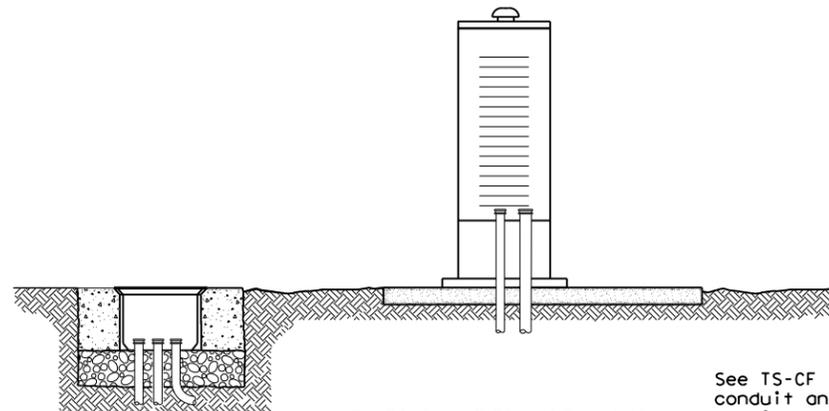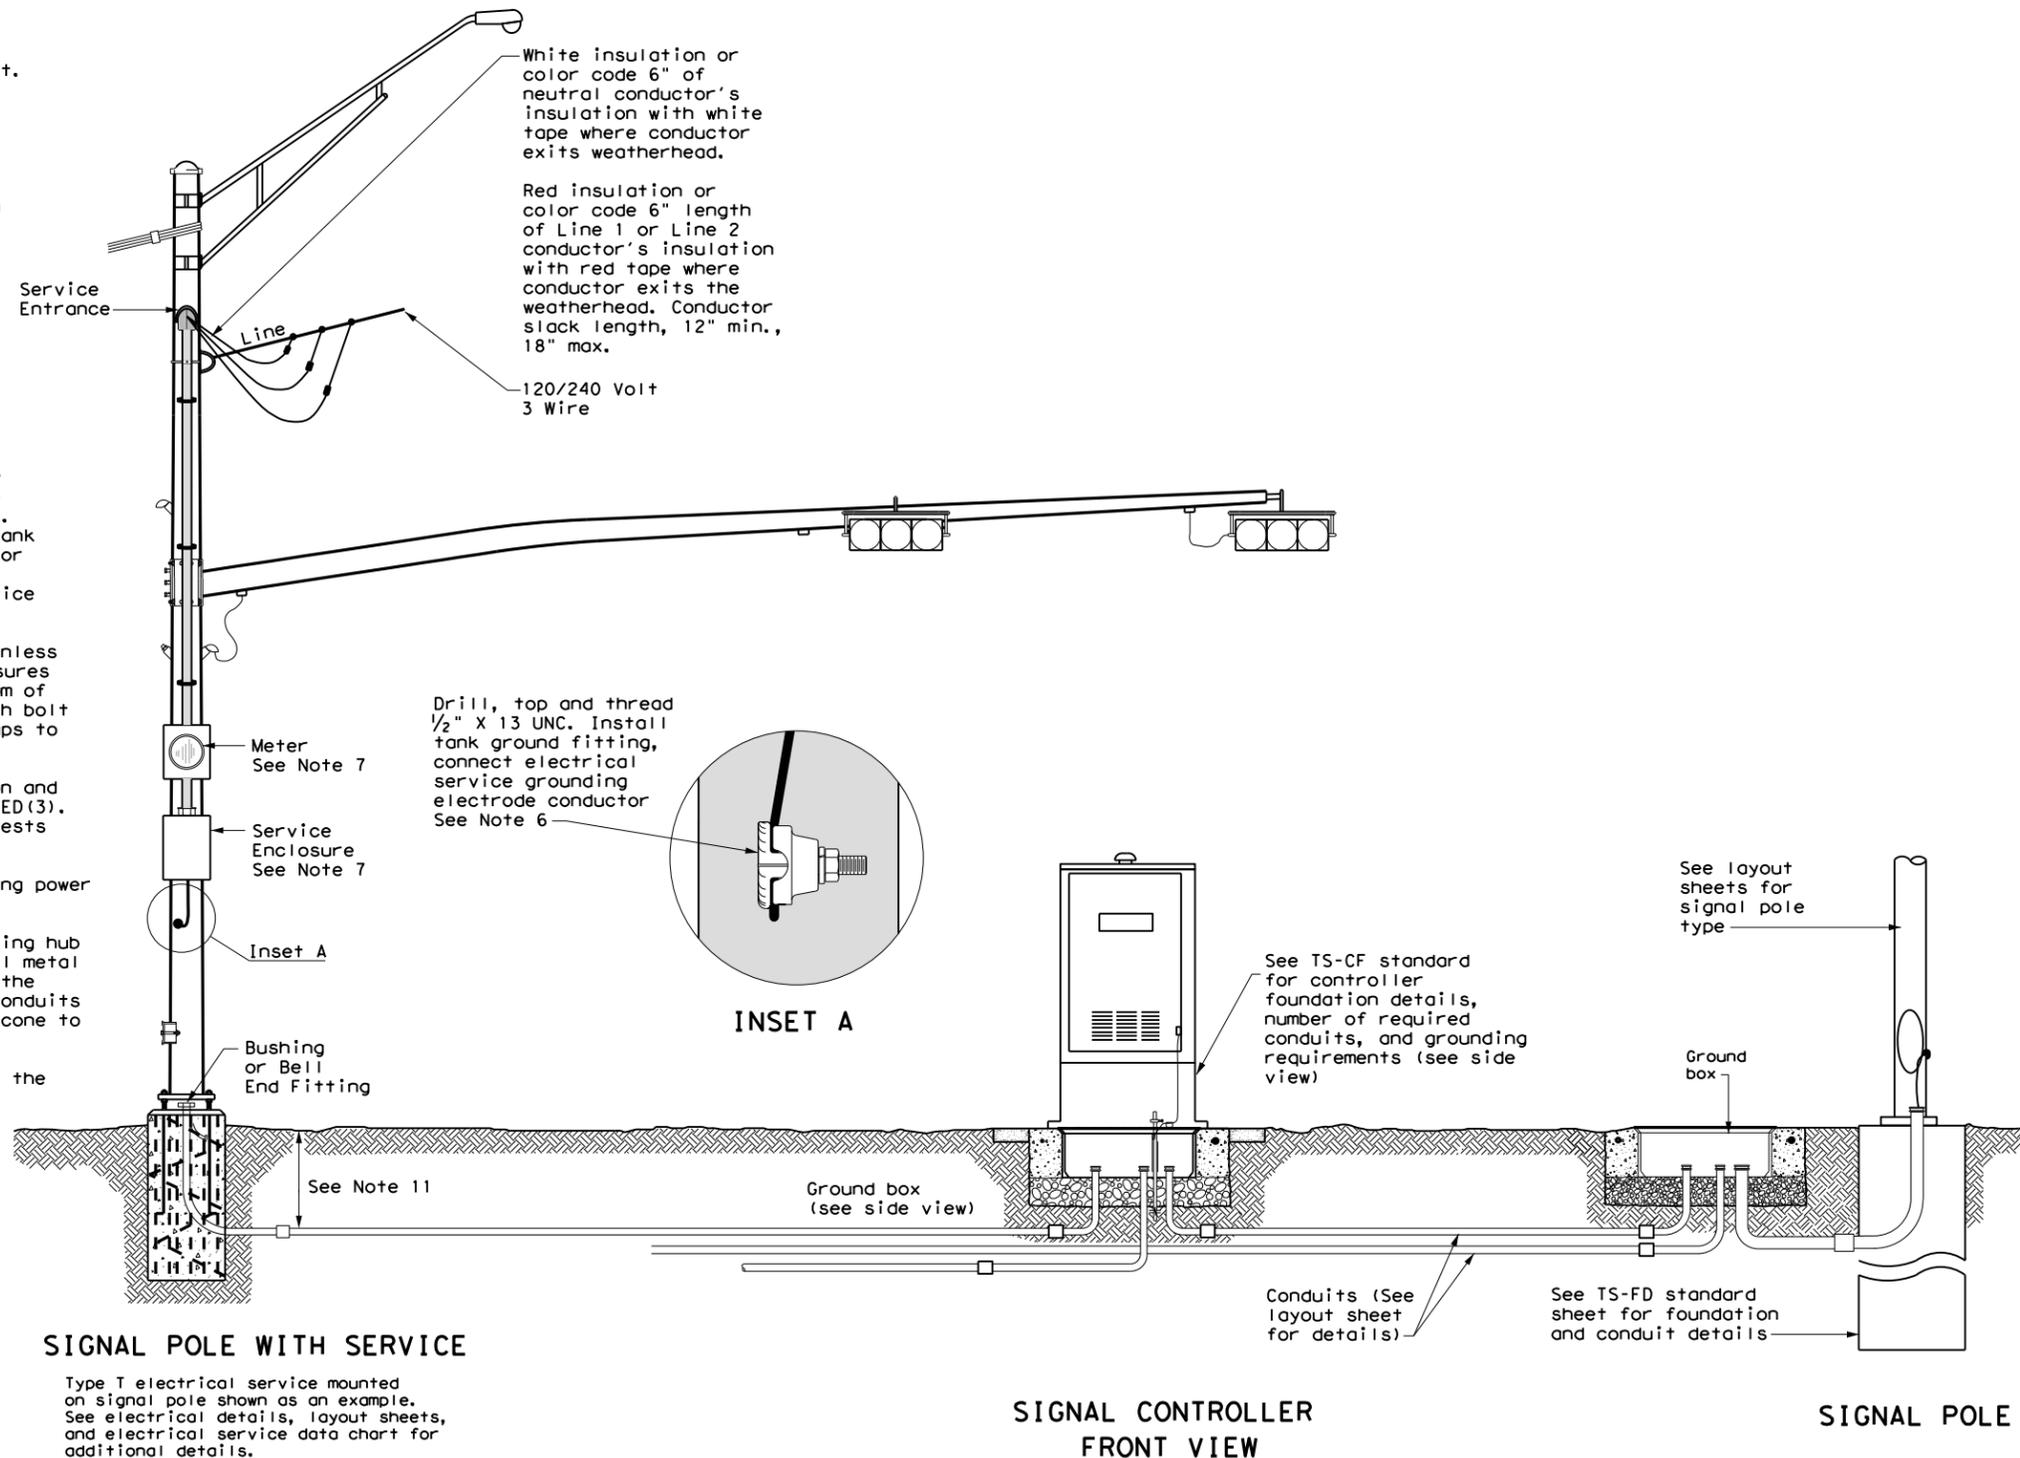

SIGNAL CONTROLLER SIDE VIEW

See TS-CF standard for conduit and grounding requirements. See layout sheets for ground box locations and any additional conduits that are required.

Texas Department of Transportation Traffic Operations Division Standard

ELECTRICAL DETAILS TYPICAL TRAFFIC SIGNAL SYSTEM DETAILS

ED(8) - 14


FILE: ed8-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044, etc	FM 1378
	DIST	COUNTY	SHEET NO.	
	18	COLLIN	274	

DATE:
FILE:


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

PEDESTAL SERVICE NOTES

1. Manufacture pedestal electrical services in accordance with Departmental Material Specifications (DMS) 11080 "Electrical Services", 11085 "Electrical Services-Pedestal (PS)" and Item 628 "Electrical Services." Provide pedestal electrical services as listed on the Material Producers List (MPL) on the Department's web site under "Roadway Illumination and Electrical Supplies," Item 628. Ensure all mounting hardware and installation details of services meet utility company specifications. Contact the local utility company for approval of pedestal details prior to installing the electrical pedestal service. Submit any changes required by the utility company prior to manufacturing the pedestal enclosure.
2. When a meter socket is required, provide a socket with a minimum 100 amp rating that complies with local utility requirements.
3. Provide Class A or C concrete for pedestal service foundations in accordance with Item 420, "Concrete Substructures," except that concrete will not be paid for directly but is considered subsidiary to Item 628.
4. Provide #4 reinforcing steel for foundations in accordance with Item 440, "Reinforcement for Concrete."
5. Install 1/2 in. X 2 1/16 in. minimum length concrete single expansion type anchors for mounting pedestal enclosure to foundation. Anchor location to match mounting holes in each corner of enclosure. Secure each of the four corners of the pedestal enclosure to the anchors in the foundation with a 1/2 in. galvanized or stainless steel machine thread bolt, a properly sized locknut and a flat washer.
6. Finish top of concrete foundation in a neat and workmanlike manner. If leveling washers are used, ensure no more than 1/8 in. gap at any corner. Do not exceed a maximum dip or rise in the foundation of 1/8 in. per foot. When properly installed, ensure the top of the service enclosure is level front to back and side to side within 1/4 in. Repair rocking or movement of the service enclosure at no additional cost to the department.
7. Do not use liquidtight flexible metal conduit (LFMC) on pedestal type services.
8. Ensure all elbows in the foundation are sized as per utility provider's conduit requirements for underground conduit and feeders. PVC extensions may be installed provided the ends of the rigid metal conduits are more than 2 in. below the top of the concrete foundation. Where extension conduits are metal, grounding bushings must be installed with a bonding jumper properly terminated.

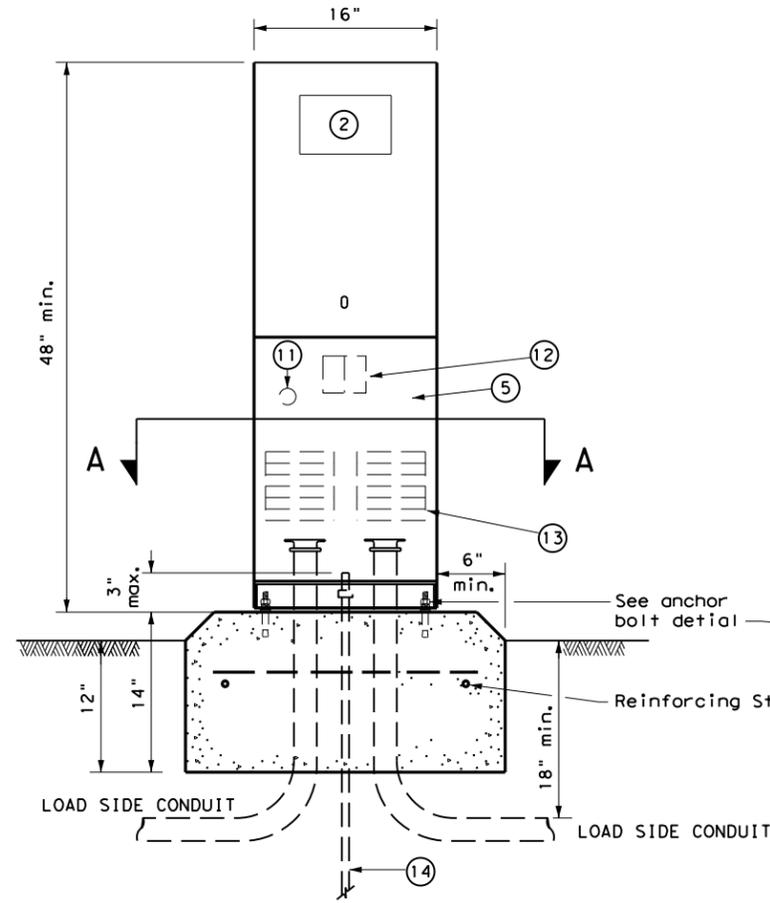


FRONT VIEW

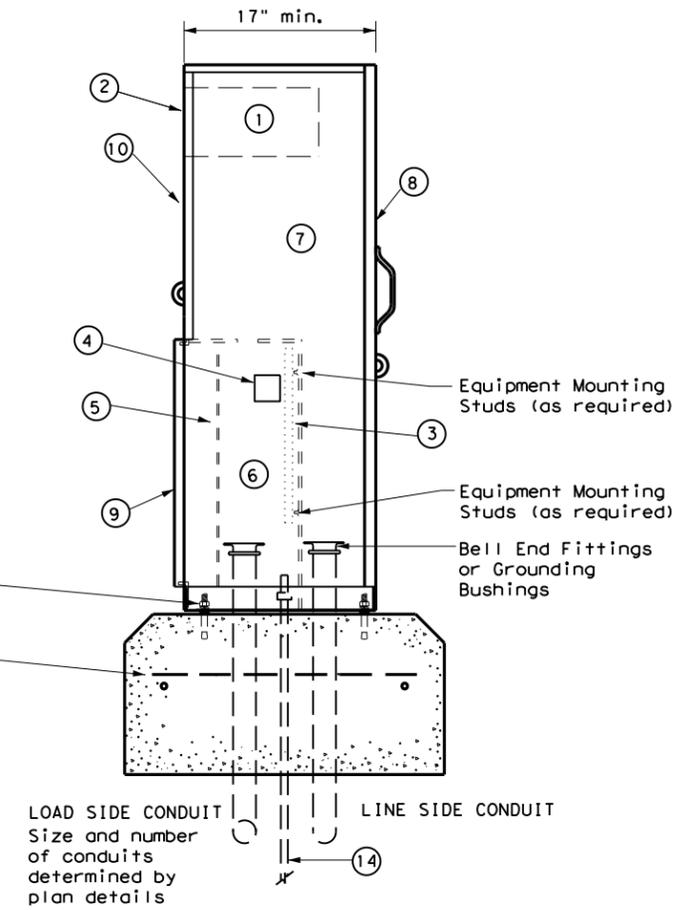


SIDE VIEW

TYPE C shown, TYPE A similar except that TYPE A shall have individual circuit breakers (CB) mounted on an equipment mounting panel. CB Handles shall protrude through hinged deadfront trim.

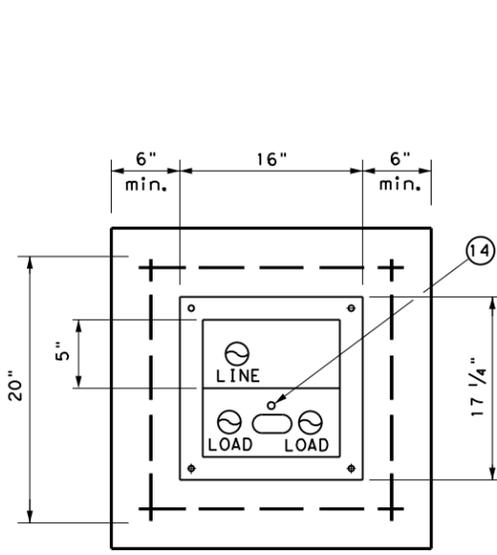

SECTION A-A

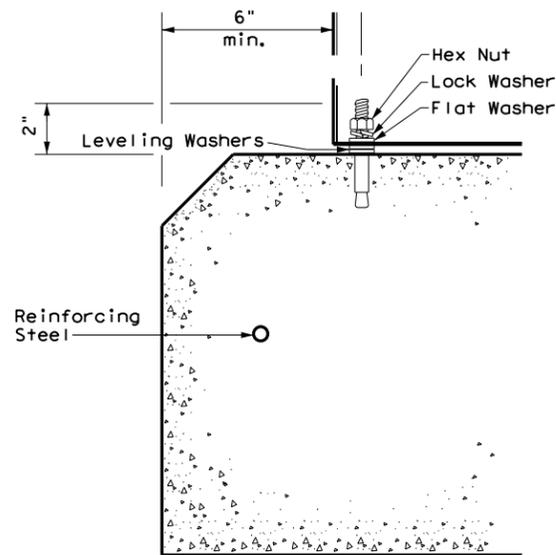

ANCHOR BOLT DETAIL


LEGEND

1	Meter Socket, (when required)
2	Meter Socket Window, (when required)
3	Equipment Mounting Panel
4	Photo Electric Control Window, (When required)
5	Hinged Deadfront Trim
6	Load Side Conduit Trim
7	Line Side Conduit Area
8	Utility Access Door, with handle
9	Pedestal Door
10	Hinged Meter Access
11	Control Station (H-O-A Switch)
12	Main Disconnect
13	Branch Circuit Breakers
14	Copper Clad Ground Rod - 5/8" X 10'

		Traffic Operations Division Standard	
ELECTRICAL DETAILS ELECTRICAL SERVICE SUPPORT PEDESTAL SERVICE TYPE PS			
ED(9) - 14			
FILE: ed9-14.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT October 2014	CONT	SECT	JOB
REVISIONS	1392	01	044, etc
	DIST	COUNTY	SHEET NO.
	18	COLLIN	275

DATE:
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

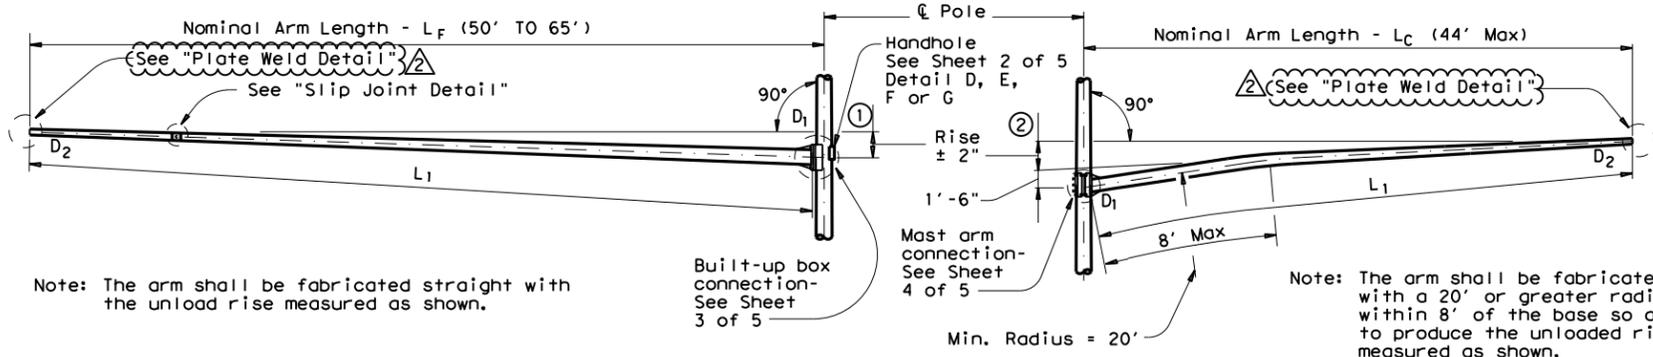

Note: The arm shall be fabricated straight with the unload rise measured as shown.


Note: The arm shall be fabricated with a 20' or greater radius within 8' of the base so as to produce the unloaded rise measured as shown.

FIXED MOUNT TRAFFIC SIGNAL ARM

① See Sheet 3 of 5 for Arm Rise

CLAMP-ON TRAFFIC SIGNAL ARM (IF REQUIRED)

② See Sheet 4 of 5 for Arm Rise and Clamp-on Arm Details

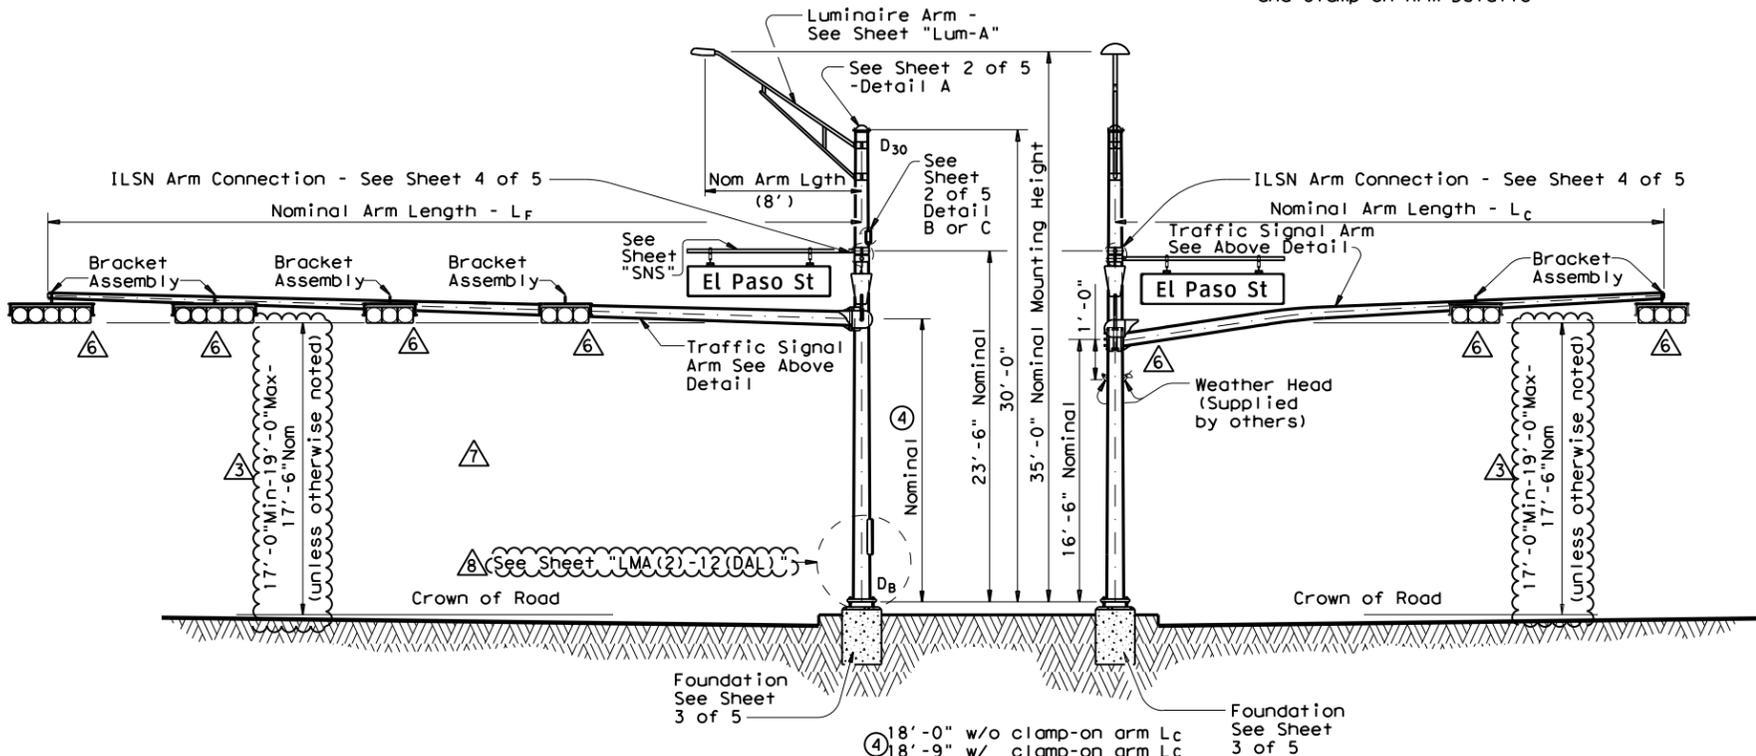

ELEVATION

(Showing fixed mount arm)

STRUCTURE ASSEMBLY

ELEVATION

(Showing clamp-on arm)

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications thereto. Design Wind Speed can be either 100 mph or 80 mph plus a 1.3 gust factor. If clamp-on traffic signal is required, designs are based on an arm included angle of 90 degrees or more. Angles of less than approximately 75 degrees will require a special design.

Poles are designed to support one 8'-0" luminaire arm, two 9'-0" internally lighted street name (ILSN) signs and two traffic signal arms with limited length combinations.

Each arm with its related attachment is shown below

Arm	Equivalent DL ⑤	WL EPA ⑤⑥
8' Luminaire Arm	Luminaire 60 lbs	1.6 sq ft
9' ILSN Arm	Sign 85 lbs	11.5 sq ft
50' to 65' Fixed Mount Arm	Signal Loads 310 lbs	52 sq ft
Up to 44' Clamp-on Arm	Signal Loads 180 lbs	32.4 sq ft

⑤ Equivalent dead load plus horizontal wind load applied at the end of arm except ILSN arm, which applied 4.5' from the centerline of the pole.

⑥ Effective projected area (actual area times drag coefficient) for the application of horizontal wind load.

Except as noted in Sheet 1 thru 5 of 5, other details not covered shall refer to Standard Sheet "LUM-A" for luminaire arm and connection details, "SNS" for internally lighted street name sign details, and "TS-FD" for anchor bolt and foundation details.

Fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the fabricator must obtain prior to fabrication. Material, fabrication tolerances, and shipping practices shall also meet the requirements of this sheet and Item 686, "Traffic Signal Pole Assemblies (Steel)".

Unless otherwise noted, all parts shall be galvanized in accordance with Item 445, "Galvanizing" after fabrication.

Deviations from the details and dimensions shown herein require submission of shop drawings in accordance with the Item 441, "Steel Structures". Alternate designs are not acceptable.

Installation of damping plate for the long mast arm is not recommended.

Provision of the bracket assembly used to support the traffic signal heads shall be under the direction of the Engineer for approval.

Design also conforms to NCHRP Report 412 for fatigue resistance except that there are no stiffeners at the base plate. TxDOT is conducting tests to determine if stiffeners at the base plate will or will not result in optimal performance; depending upon the results of the tests, poles may need a retrofit to ensure optimal fatigue performance.

- MODIFICATIONS:**
- ① NOT USED
 - ② REPLACED TENON DETAIL WITH PLATE WELD DETAIL. (2/12)
 - ③ REVISED MINIMUM SIGNAL HEIGHT. (3/12)
 - ④ REMOVED "MA-D" REFERENCE. (2/12)
 - ⑤ REMOVED TABLE OF DIMENSIONS "A". (2/12)
 - ⑥ REMOVED CGB CONNECTORS. (2/12)
 - ⑦ REMOVED THREADED COUPLING FOR CGB CONNECTOR. (2/12)
 - ⑧ REVISED THE ELEVATION OF ACCESS COMPARTMENT. (3/12)

NOTE:
Pole manufacturer shall drill 1/2" hole in bottom of mast arm at end plate.
(for hot-dip galvanizing)


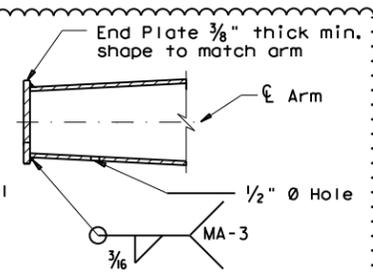


PLATE WELD DETAIL

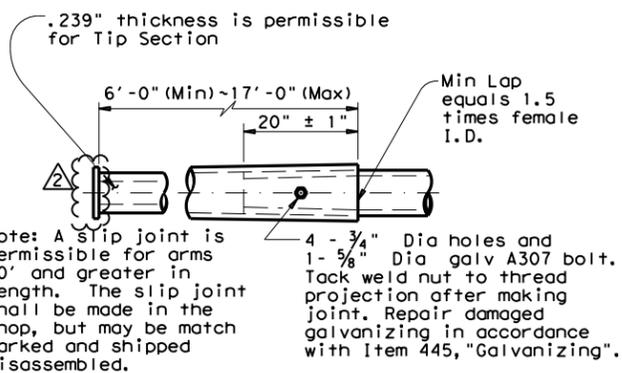















SLIP JOINT DETAIL (FIXED MOUNT ARM)

Texas Department of Transportation
**TRAFFIC SIGNAL SUPPORT STRUCTURES
LONG MAST ARM ASSEMBLY
(50 TO 65 FT)
(80 AND 100 MPH WIND ZONE)
LMA(1)-12(DAL)**




Sheet 1 of 5

© TxDOT July 2000		DN: JK	CK: GRB	DW: FDN	CK: CAL
REVISIONS		CONT	SECT	JOB	HIGHWAY
4-20-01	1-12	1392	01	044 ,etc	FM 1378
DIST		COUNTY		SHEET NO.	
DAL		COLLIN		276	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

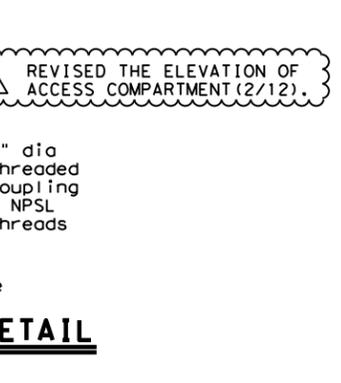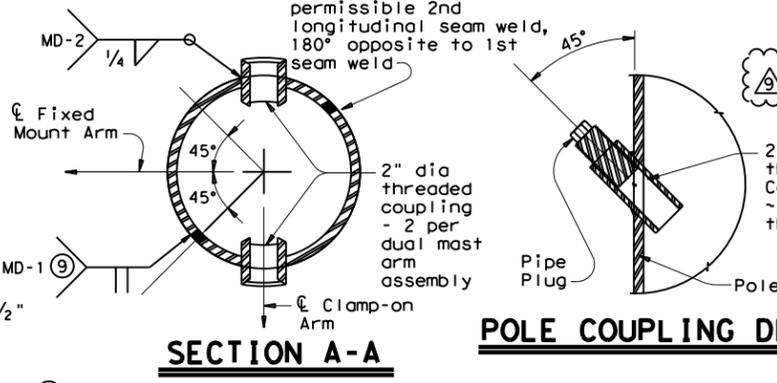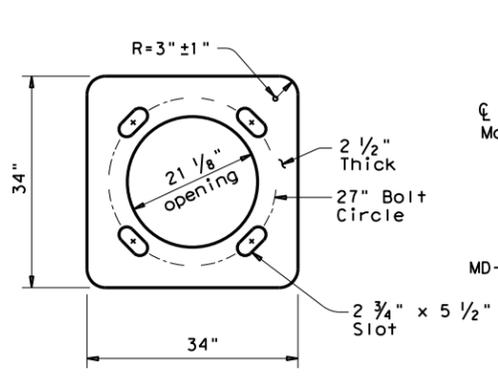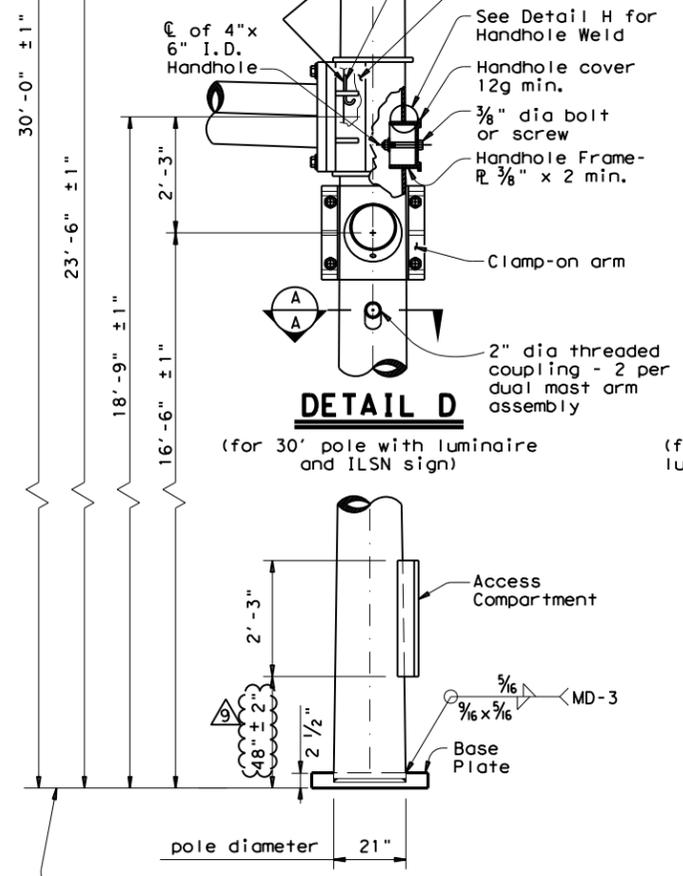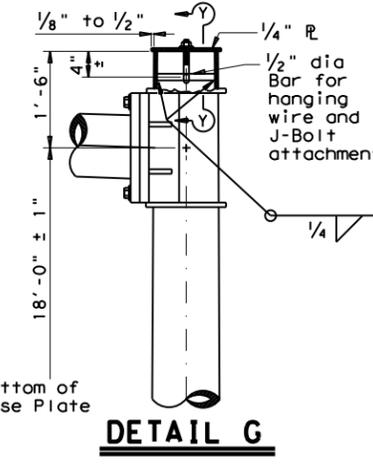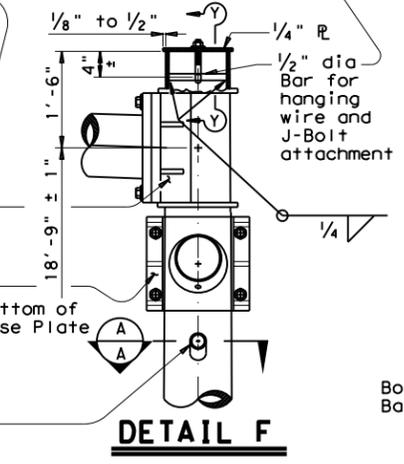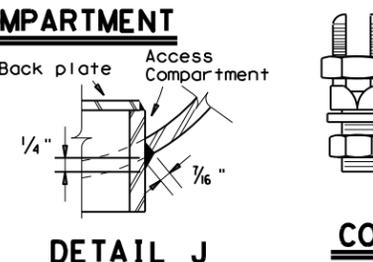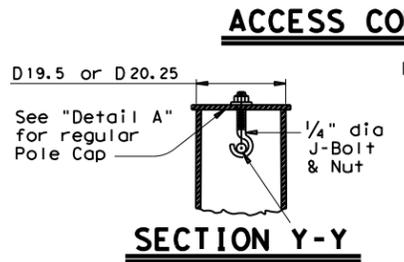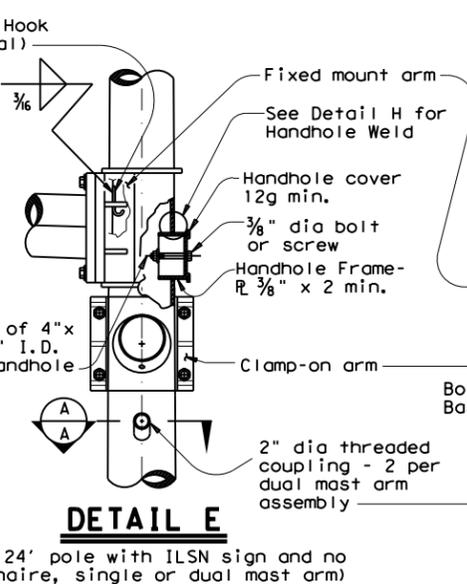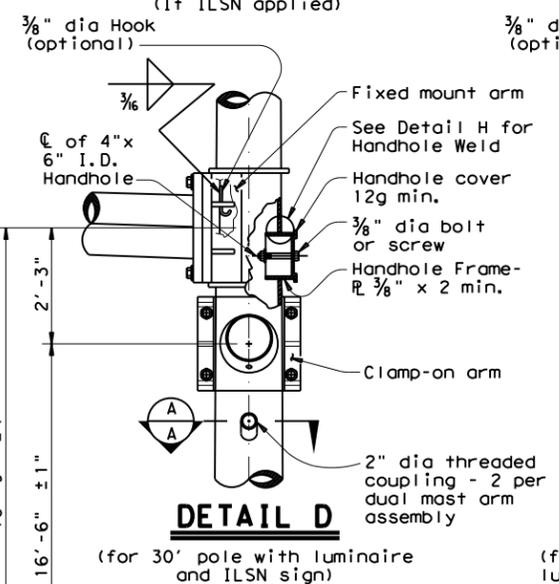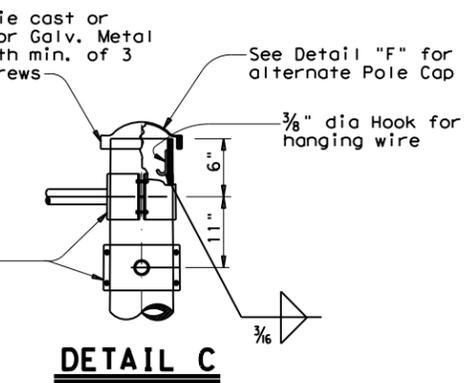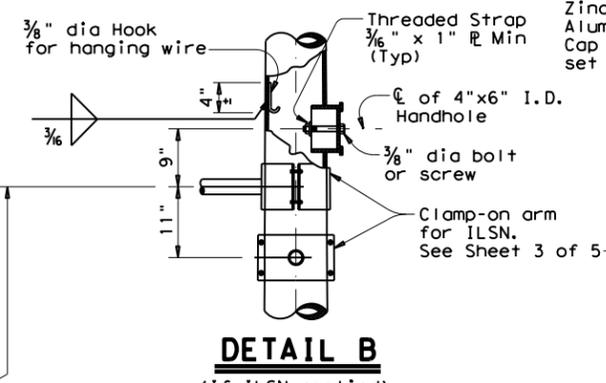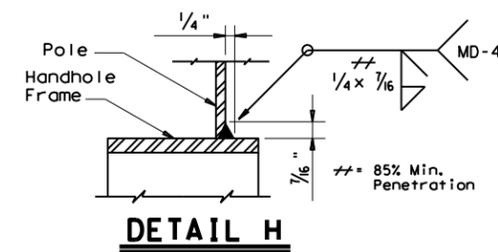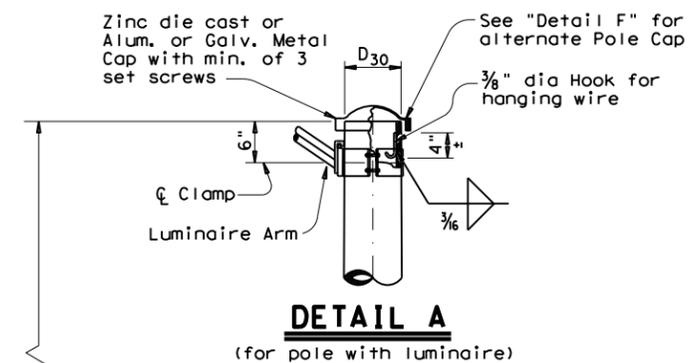

⑨ Longitudinal seam weld must be oriented within 90° (45° rotation each side) along the fixed mount arm. 60% min penetration required, 100% penetration within 6\"/>

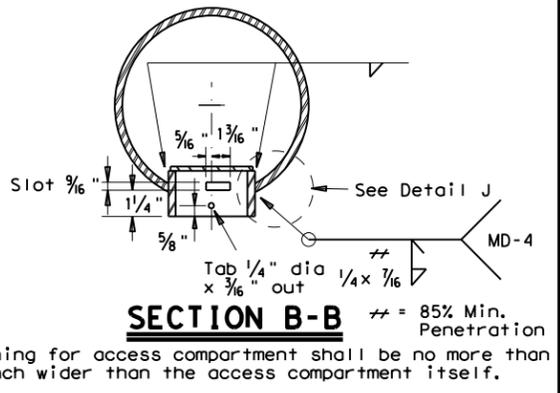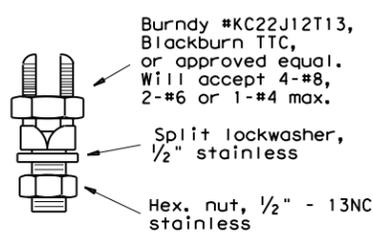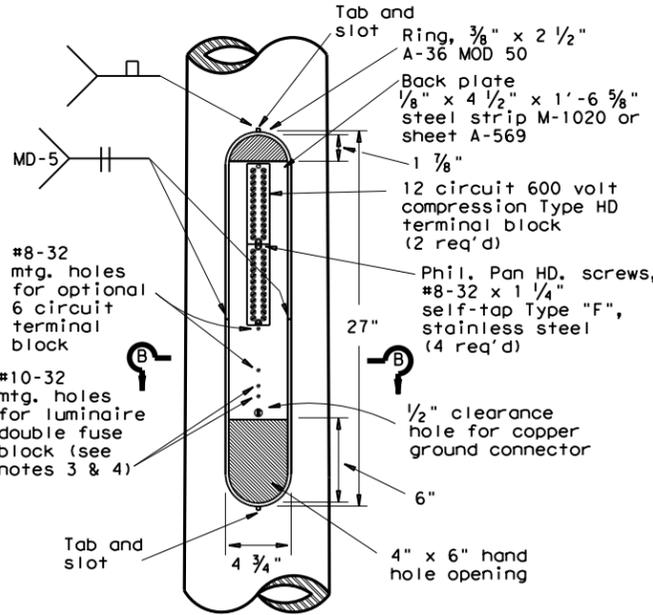

- ACCESS COMPARTMENT NOTES:**
- The cover shall be one piece formed from ABS plastic, shall be a pearl gray color, and shall be suitable for exposure to harsh sunlight and extreme weather. Cover shall latch with two screw latches and shall fit tightly to the enclosure ring to create a rainproof seal. Latch screws shall be 1/4-20 stainless flat socket head screws with tamper proof feature.
 - The pole manufacturer shall provide with each pole a separate kit consisting of: one cover with two latching assemblies, two terminal strips (Marathon #985GP12CU or approved equal), four #8-32 x 1 1/4\"/>
 - The screw hole spacing on the enclosure back plate shall be for two Marathon #985GP12 terminal strips, one Marathon #985GP06CU terminal strip, and one Bussmann #BM6032B fuse block.
 - Install one Bussmann #BM6032B, Littelfuse #L60030M-2C, or Ferraz-Shawmut #30352 fuse block for poles where luminaires are to be installed.

MATERIALS	
Round Shafts or Polygonal Shafts ⑦	ASTM A595 Gr. A, A588, A1008 HSLAS Gr.50 Class 2, A1011 HSLAS Gr.50 Class 2, A572 Gr.50 or A1011 SS Gr.50 ⑧
Plates ⑦	ASTM A36, A588, or A572 Gr.50
Connection Bolts	ASTM A325, or A449 except where noted
Pin Bolts	ASTM A325
Pipe ⑦	ASTM A53 Gr. B, A501, A1008 HSLAS-F Gr.50, A1011 HSLAS-F Gr.50
Misc. Hardware	Galvanized steel or stainless steel or as noted

- ⑦ ASTM A572, A1008 HSLAS, A1011 HSLAS, A1008 HSLAS-F, A1011 HSLAS-F, or A1011 SS may have higher yield strengths but shall not have less elongation than the grade indicated.
- ⑧ ASTM A1011 SS Gr.50 shall also have a minimum elongation of 18 percent in 8 inches or 23 percent in 2 inches. Material thickness in excess of those stipulated under A1011 SS will be acceptable providing the material meets all other A1011 SS requirements and the requirements of this item.


Texas Department of Transportation

TRAFFIC SIGNAL SUPPORT STRUCTURES LONG MAST ARM ASSEMBLY (50 TO 65 FT) (80 AND 100 MPH WIND ZONE) LMA(2)-12(DAL)


Sheet 2 of 5

© TxDOT July 2000		DN: JK	CK: GRB	DW: FDN	CK: CAL
REVISIONS		CONT	SECT	JOB	HIGHWAY
4-20-01	1-12	1392	01	044 .etc	FM 1378
DIST		COUNTY		SHEET NO.	
DAL		COLLIN		277	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

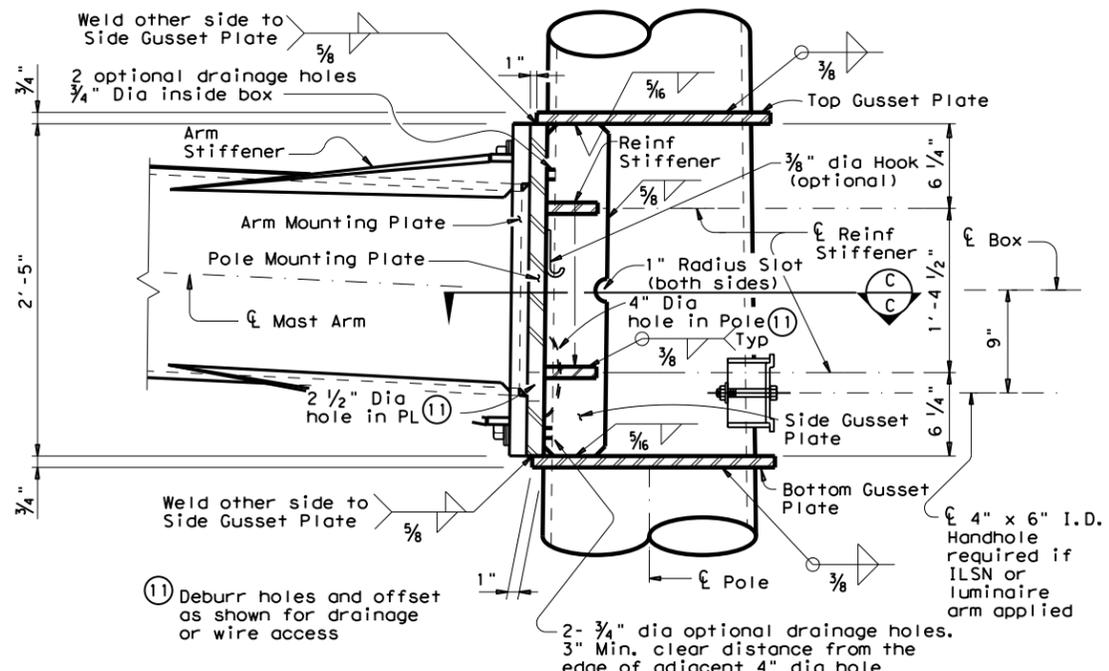


BUILT-UP BOX CONNECTION

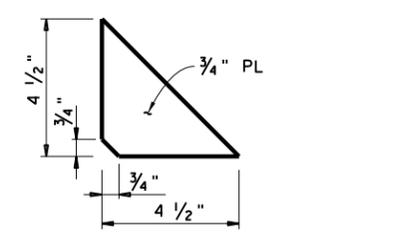


REINFORCING STIFFENER

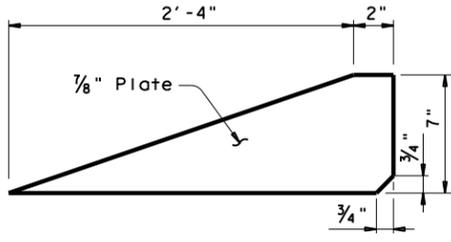


ARM STIFFENER
(Cut to match arm inclination and taper)

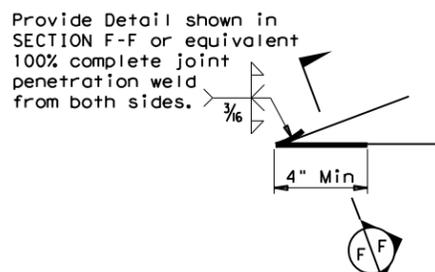


DETAIL "K"




SECTION F-F

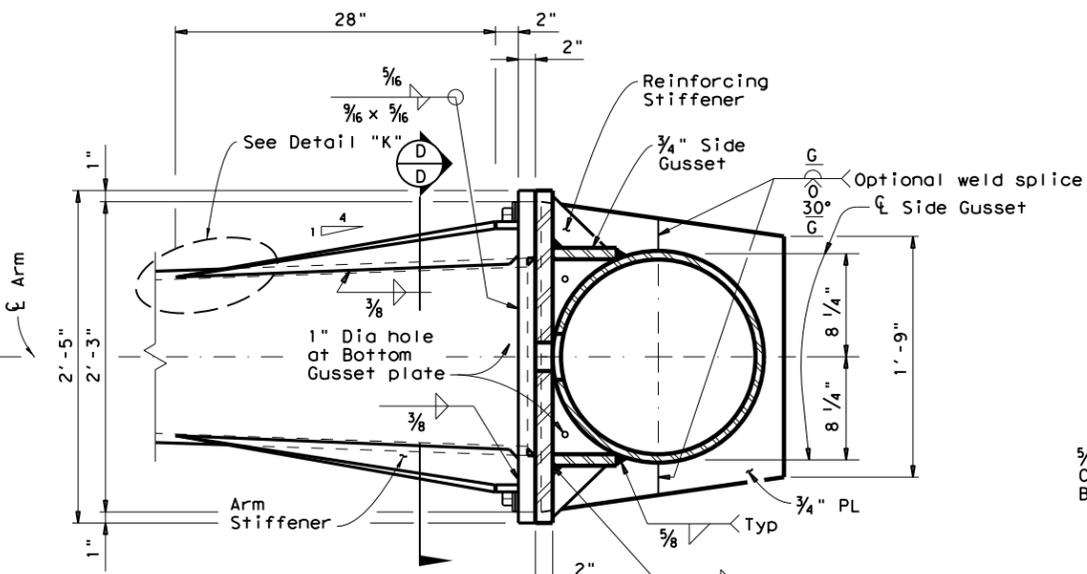


SECTION C-C

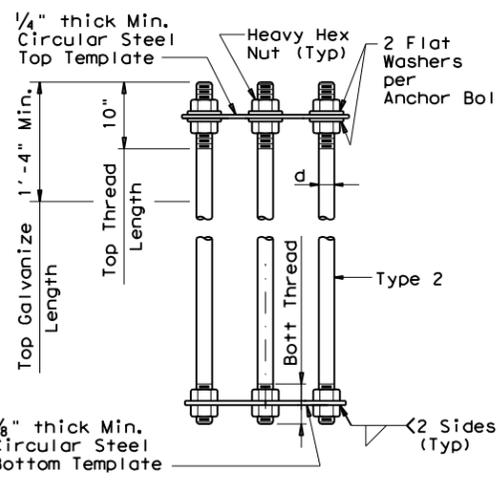

ANCHOR BOLT ASSEMBLY

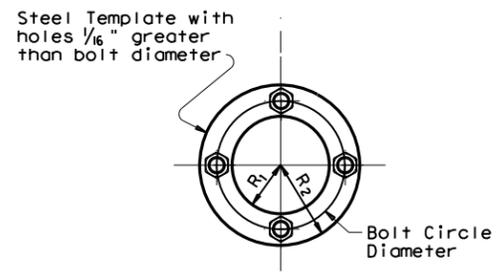

TEMPLATE DETAIL

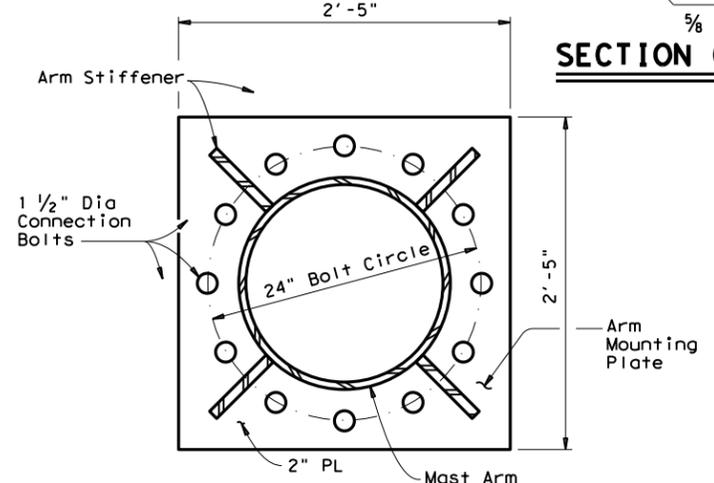

SECTION D-D

FDN TYPE	DRILLED SHAFT DIA	REINFORCING STEEL		DRILLED SHAFT LENGTH-ft (16), (17), (18)			ANCHOR BOLT DESIGN (14)			FOUNDATION DESIGN LOAD (15)		TYPICAL APPLICATION	
		VERT BARS	SPIRAL & PITCH	TEXAS CONE PENETROMETER N blows/ft			ANCHOR BOLT DIA	Fy (ksi)	BOLT CIR DIA	ANCHOR TYPE	MOMENT K-ft		SHEAR Kips
				10	15	40							
48-A	48"	20 #9	#4 at 6"	21.9	19.5	14.7	2 1/2"	55	27"	2	490	10	50' to 65' Mast arm assembly.

SEE SHEET "TS-FD" FOR ADDITIONAL DETAILS.

- (14) Anchor bolt design develops the foundation capacity given under Foundation Design Loads.
- (15) Foundation Design Loads are the allowable moments and shears at the base of the structure.
- (16) Field Penetrometer readings at a depth of approximately 3 to 5 feet may be used to adjust shaft lengths.
- (17) If rock is encountered, the Drilled Shaft shall extend a minimum of two diameters into solid rock.
- (18) Decimal lengths in Design Table are to allow interpolation for other penetrometer values. Round to nearest foot for entry into Summary Table.

Fixed Mount Arm L _F	ROUND POLES (13)					Foundation Type
	D _B	D _{19.5}	D _{20.25}	D ₂₄	D ₃₀	
ft.	in.	in.	in.	in.	(12)thk in.	
50', 55', 60', 65'	21.0	18.2	17.6	16.8	.3125	48-A

Fixed Mount Arm L _F	ROUND ARMS (13)				
	L ₁	D ₁	D ₂	(12)thk in.	Rise
ft.	ft.	in.	in.	in.	
50	49	18.5	11.7	.3125	3'- 3"
55	54	18.5	11.0	.3125	3'- 7"
60	59	18.5	10.3	.3125	3'- 11"
65	64	18.5	9.6	.3125	4'- 4"

- D_B = Pole Base O.D.
- D_{19.5} = Pole Top O.D. with no Luminaire and no ILSN (single mast arm)
- D_{20.25} = Pole Top O.D. with no Luminaire and no ILSN (dual mast arm)
- D₂₄ = Pole Top O.D. with ILSN w/out Luminaire
- D₃₀ = Pole Top O.D. with Luminaire
- D₁ = Arm Base O.D.
- D₂ = Arm End O.D.
- L₁ = Shaft Length
- L_F = Fixed Arm Length

- (12) Thickness shown is minimum, thicker materials may be used.
- (13) Shaft profile 16-sided or 18-sided is considered to be equivalent to round section.

GENERAL NOTES:

Built-up Box Connection: For the welded arm-to-pole connection as a built-up box configuration illustrated here is an example only, fabricators are required to submit a shop drawing of box connection for approval. The drawing shall specify the details of each box element, welds of arm-to-pole connection, arm-to-plate socket connection, and arm rise creation. Specify the proper location of drain holes along the pole. 2 1/2 inch dia hole in the pole mounting plate and 4 inch dia hole in the pole need to be aligned for wiring access or drainage. Arm stiffeners cut to match arm inclination and taper shall also be included.

The deviation from flat for either arm or pole mounting plate shall not exceed 1/32 inch, which is measured along the center of mounting plate to a radial distance of 13.5 inch. The deformed-from-flat connection between arm and pole mounting plates shall not be allowed if the center of both mounting plates cannot contact directly.

Fixed mount details are used for single mast arm assemblies and for the first arm on dual mast arm assemblies.


ANCHOR BOLT & TEMPLATE SIZE						
Bolt Dia in.	Length #	Top Thread	Bottom Thread	Bolt Circle	R ₂	R ₁
2 1/2"	5'-2"	10"	6 1/2"	27"	16"	11"

*Min dimension given, longer bolts are acceptable.

TRAFFIC SIGNAL SUPPORT STRUCTURES
LONG MAST ARM ASSEMBLY
(50 TO 65 FT)
(80 AND 100 MPH WIND ZONE)
 Sheet 3 of 5 LMA (3)-12

© TxDOT July 2000		DN: JK	CK: GRB	DW: FDN	CK: CAL
REVISIONS		CONT	SECT	JOB	HIGHWAY
4-20-01	1-12	1392	01	044 .etc	FM 1378
		DIST	COUNTY	SHEET NO.	
		DAL	COLLIN	278	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

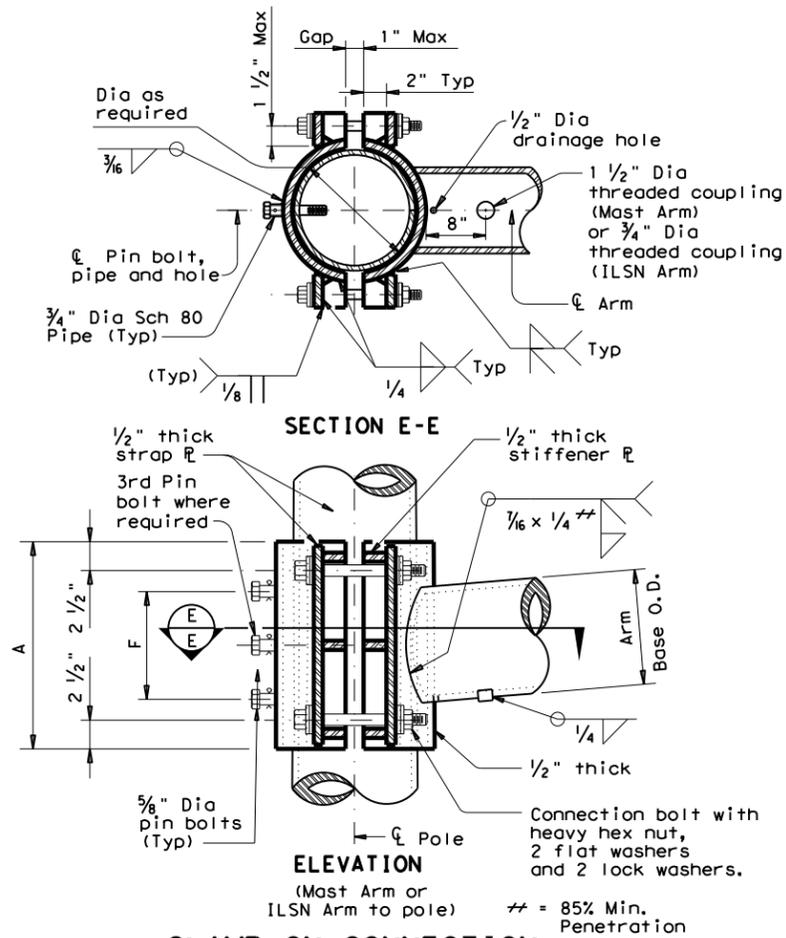

CLAMP-ON CONNECTION

80 MPH WIND										
Clamp-on Arm LC	ROUND ARMS					POLYGONAL ARMS				
	L ₁	D ₁	D ₂	thk (12)	Rise	L ₁	D ₁	D ₂	thk (12)	Rise
20	19.1	6.5	3.8	.179	1'-9"	19.1	7.0	3.5	.179	1'-8"
24	23.1	7.5	4.3	.179	1'-10"	23.1	7.5	3.5	.179	1'-9"
28	27.1	8.0	4.2	.179	1'-11"	27.1	8.0	3.5	.179	1'-10"
32	31.0	9.0	4.7	.179	2'-1"	31.0	9.0	3.5	.179	2'-0"
36	35.0	9.5	4.6	.179	2'-4"	35.0	10.0	3.5	.179	2'-1"
40	39.0	9.5	4.1	.239	2'-8"	39.0	9.5	3.5	.239	2'-3"
44	43.0	10.0	4.1	.239	2'-11"	43.0	10.0	3.5	.239	2'-6"

100 MPH WIND										
Clamp-on Arm LC	ROUND ARMS					POLYGONAL ARMS				
	L ₁	D ₁	D ₂	thk (12)	Rise	L ₁	D ₁	D ₂	thk (12)	Rise
20	19.1	8.0	5.3	.179	1'-8"	19.1	8.0	3.5	.179	1'-7"
24	23.1	9.0	5.8	.179	1'-9"	23.1	9.0	3.5	.179	1'-8"
28	27.1	9.5	5.7	.179	1'-10"	27.1	10.0	3.5	.179	1'-9"
32	31.0	9.5	5.2	.239	1'-11"	31.0	9.5	3.5	.239	1'-10"
36	35.0	10.0	5.1	.239	2'-0"	35.0	10.0	3.5	.239	1'-11"
40	39.0	10.5	5.1	.239	2'-3"	39.0	11.0	3.5	.239	2'-1"
44	43.0	11.0	5.1	.239	2'-8"	43.0	11.5	4.0	.239	2'-3"

D₁ = Arm Base O.D.
 D₂ = Arm End O.D.
 L₁ = Shaft Length
 LC = Clamp-on Arm Length

(12) Thickness shown is minimum, thicker materials may be used.

CLAMP-ON ARM CONNECTION					
ILSN Arm Size		A	F	4 Conn. Bolts	5/8" Dia. Pin Bolts
Sch 40 pipe Dia	Thick				
in.	in.	in.	in.	in.	ea
3	.216	10	4	3/4	2

Mast Arm Size					
Mast Arm Size		A	F	4 Conn. Bolts	5/8" Dia. Pin Bolts
Base Dia	Thick				
in.	in.	in.	in.	in.	ea
6.5	.179	12	6	1	2
7.5	.179	14	8	1	2
8.0	.179	14	8	1	2
9.0	.179	16	10	1	2
9.5	.179	18	12	1 1/4	3
9.5	.239	18	12	1 1/4	3
10.0	.239	18	12	1 1/4	3
10.5	.239	18	12	1 1/4	3
11.0	.239	18	12	1 1/4	3
11.5	.239	18	12	1 1/4	3


GENERAL NOTES:

Clamp-on details are used for the second arm on dual mast arm assemblies or ILSN arm support. For a clamp-on mast arm, a maximum 1 1/2" wide vertical slotted hole may be cut in the front clamp plate to facilitate drainage during galvanizing. The slot shall be centered behind the arm and shall be no longer than the arm diameter minus 1". For an ILSN arm, a 1 1/2" diameter hole shall be cut in the front clamp plate for wire access. A matched hole shall be field drilled through the pole to provide wire access after arm is oriented. Deburr both holes.


Where duplicate parts occur on a detail, welds shown for part shall apply to all similar parts on the detail.

Pin bolts are required to prevent rotation of clamp-on arms under design wind forces. Pin bolts shall be ASTM A325 with threads excluded from the shear plane. Pin bolt and 3/4" diameter pipe shall have 3/16" diameter holes for a 1/8" diameter galvanized cotter pin. Back clamp plate shall be furnished with a 3/4" diameter hole for each pin bolt. An 1/16" diameter hole for each pin bolt shall be field drilled through the pole after arm orientations have been approved by the Engineer.


REPLACED TENON DETAIL WITH PLATE WELD DETAIL (2/12).

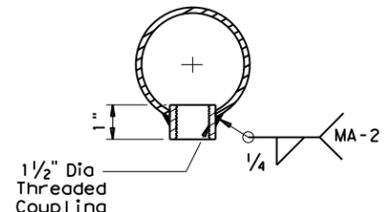

ARM COUPLING DETAIL

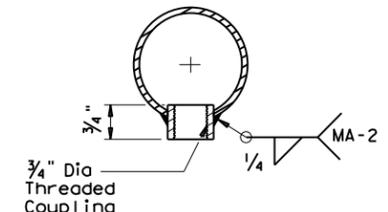


ILSN ARM COUPLING DETAIL

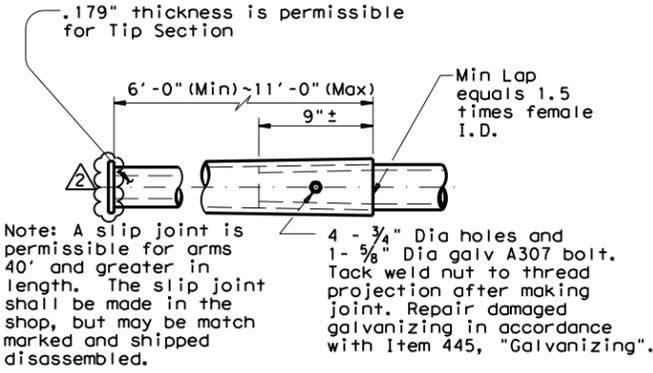

SLIP JOINT DETAIL (CLAMP-ON ARM)

Stainless steel bands (or Cables) and cast bracket as in "Astro-Brac", "Sky Bracket" or "Easy Bracket" with 1 1/2" Dia Threaded Coupling.

BRACKET ASSEMBLY




ARM WELD DETAIL

(19) Longitudinal Seam Weld must be oriented within the lower 90° of the signal arm. 60% Min penetration 100% penetration within 6" of circumferential base welds.

TRAFFIC SIGNAL SUPPORT STRUCTURES
LONG MAST ARM ASSEMBLY
 (50 TO 65 FT)
 (80 AND 100 MPH WIND ZONE)
 Sheet 4 of 5 LMA(4)-12(DAL)

© TxDOT November 2000		DN: JK	CK: GRB	DW: FDN	CK: CAL
REVISIONS		CONT	SECT	JOB	HIGHWAY
4-20-01	1-12	1392	01	044 .etc	FM 1378
DIST		COUNTY		SHEET NO.	
DAL		COLLIN		279	



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

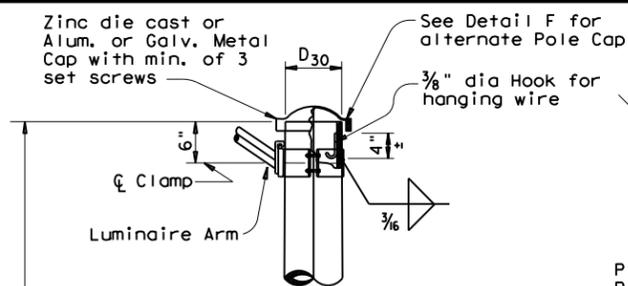


DETAIL A

(for pole with luminaire)

POLE COUPLING DETAIL

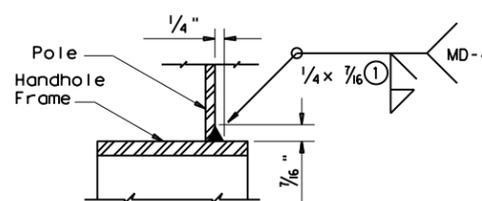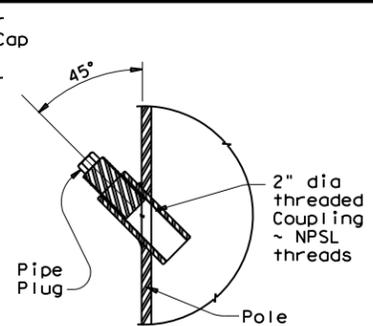


DETAIL G

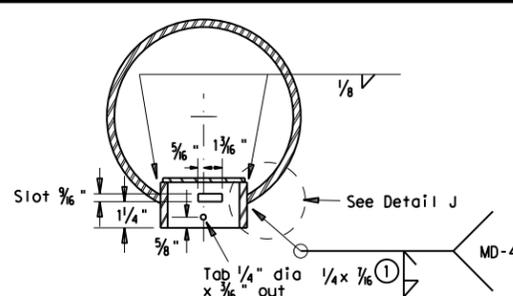

SECTION X-X


Opening for access compartment shall be no more than 1/16 inch wider than the access compartment itself.

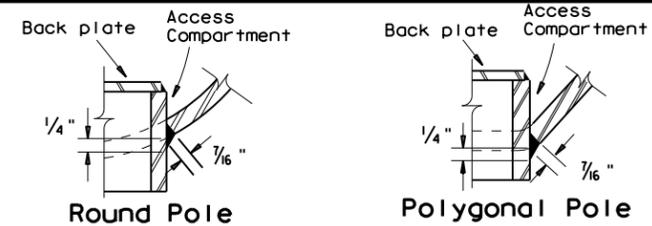

DETAIL J

Ring, 3/8" x 2 1/2" ASTM A572 Gr 50


Back plate 1/8" x 4 1/2" x 1'-6 3/8" steel strip M-1020 or sheet A-569

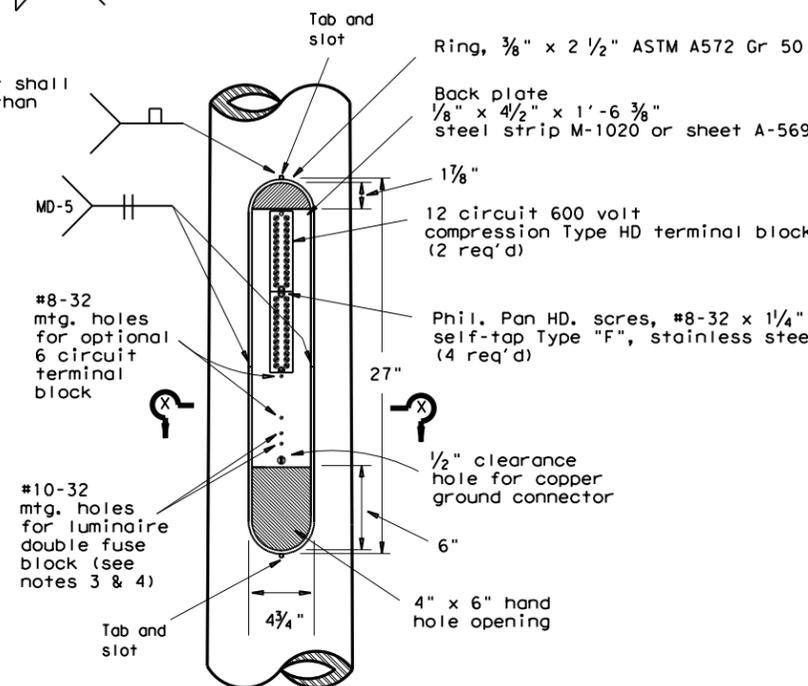

ACCESS COMPARTMENT


NOTES:

- The cover shall be one piece formed from ABS plastic, shall be a pearl gray color, and shall be suitable for exposure to harsh sunlight and extreme weather. Cover shall latch with two screw latches and shall fit tightly to the enclosure ring to create a rainproof seal. Latch screws shall be 1/4-20 stainless flat socket head screws with tamper proof feature.
- The pole manufacturer shall provide with each pole a separate kit consisting of: one cover with two latching assemblies, two terminal strips (Marathon #985GP12CU or approved equal), four #8-32 x 1 1/4" self tapping type "F" stainless steel pan head screws, and one ground connector (Blackburn TTC, Burndy KC22J12T13, or IlSCO SSS-5). The traffic signal contractor shall install the kit items in the field.
- The screw hole spacing on the enclosure back plate shall be for two Marathon #985GP12 terminal strips, one Marathon #985GP06CU terminal strip, and one Bussmann #BM6032B fuse block.
- Install one Bussmann #BM6032B, Littelfuse #L60030M-2C, or Ferraz-Shawmut #30352 fuse block for poles where luminaires are to be installed.

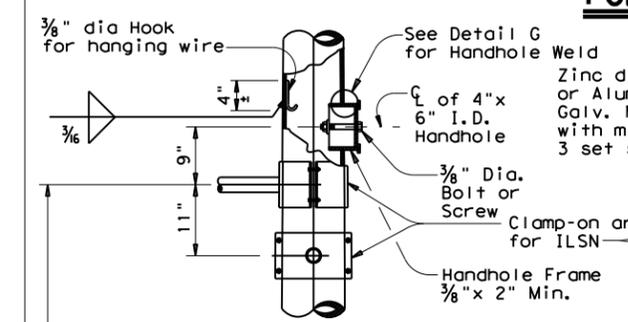


DETAIL B


(If ILSN applied)

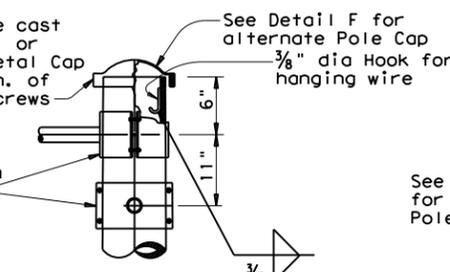


DETAIL C

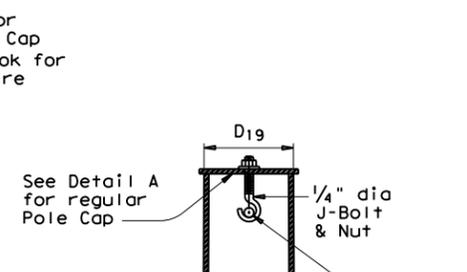

SECTION Y-Y

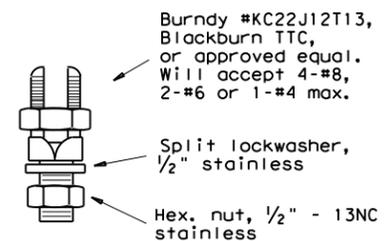


COPPER GROUND CONNECTOR

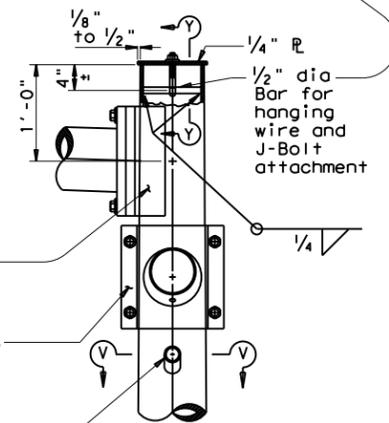


DETAIL F

(for 19' pole with no ILSN sign and no luminaire)

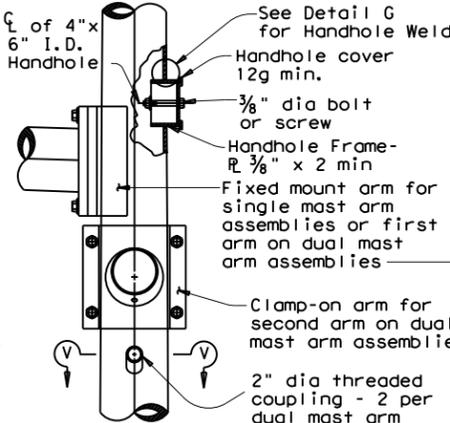

DETAIL E


(for 24' pole with ILSN sign and no luminaire)

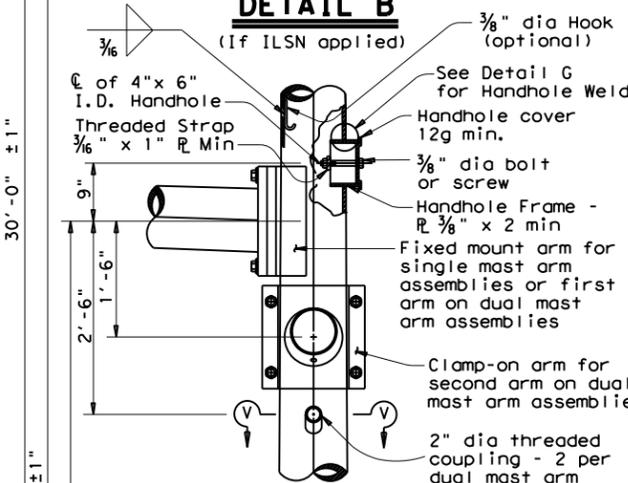


DETAIL D

(for 30' pole with luminaire and ILSN sign)


Anchor Bolt Diameter	Bolt Hole Diameter	Slot Length	Bolt Circle Diameter	Base R Dim. L x T	Adjust. Range
1 1/2"	1 3/4"	3 1/2"	17"	18" x 1 1/2"	13.4°
1 3/4"	2"	4"	19"	20" x 1 3/4"	13.5°
2"	2 1/4"	4 1/2"	21"	22" x 2"	13.6°
2 1/4"	2 1/2"	5"	23"	24" x 2 1/4"	13.7°

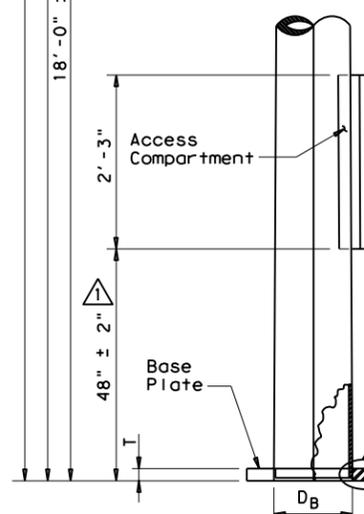

POLE ELEVATION

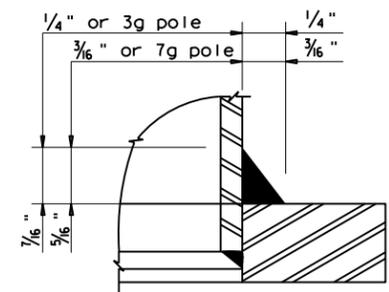

DETAIL H

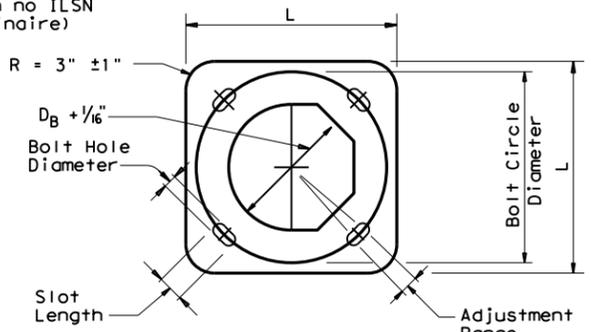

BASE PLATE PLAN

- ① 85% Min. penetration
- ② 60% Min. penetration 100% penetration within 6" of circumferential base welds.

△ REVISED THE ELEVATION OF ACCESS COMPARTMENT (2/12).

Texas Department of Transportation


TRAFFIC SIGNAL SUPPORT STRUCTURES MAST ARM POLE DETAILS

MA-D-12 (DAL)


© TxDOT August 1995		DN: MS	CK: JSY	DW: FDN	CK: CAL
REVISIONS		CONT	SECT	JOB	HIGHWAY
8-99	1-12	1392	01	044 .etc	FM 1378
DIST		COUNTY		SHEET NO.	
DAL		COLLIN		282	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

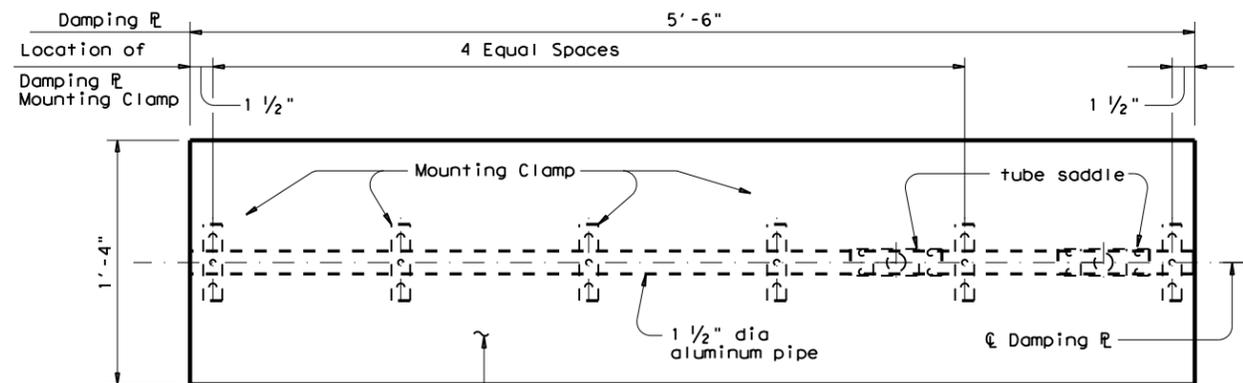


PLAN

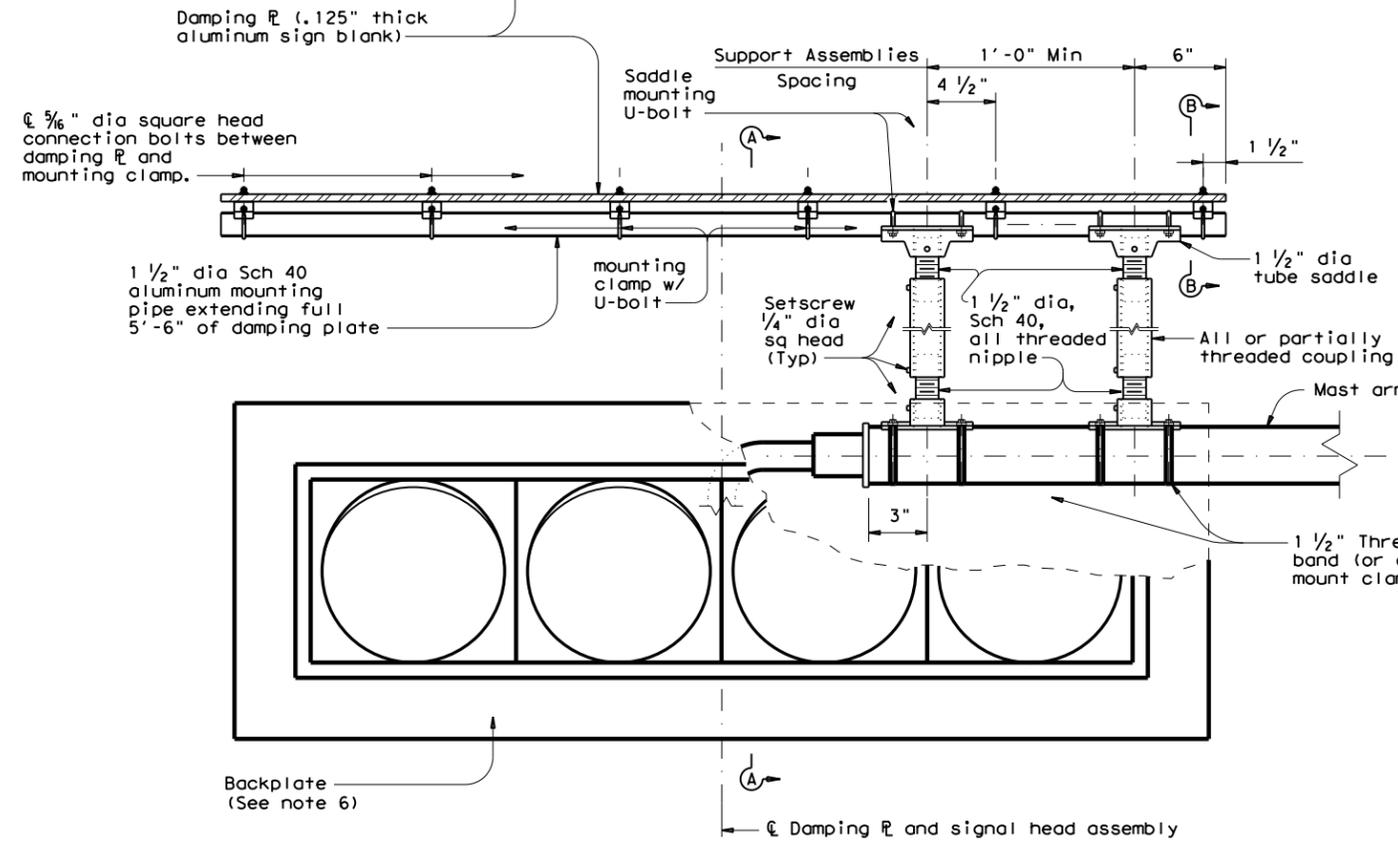


ELEVATION

DAMPING PLATE MOUNTING DETAILS
(Showing alternate placement of signal head)

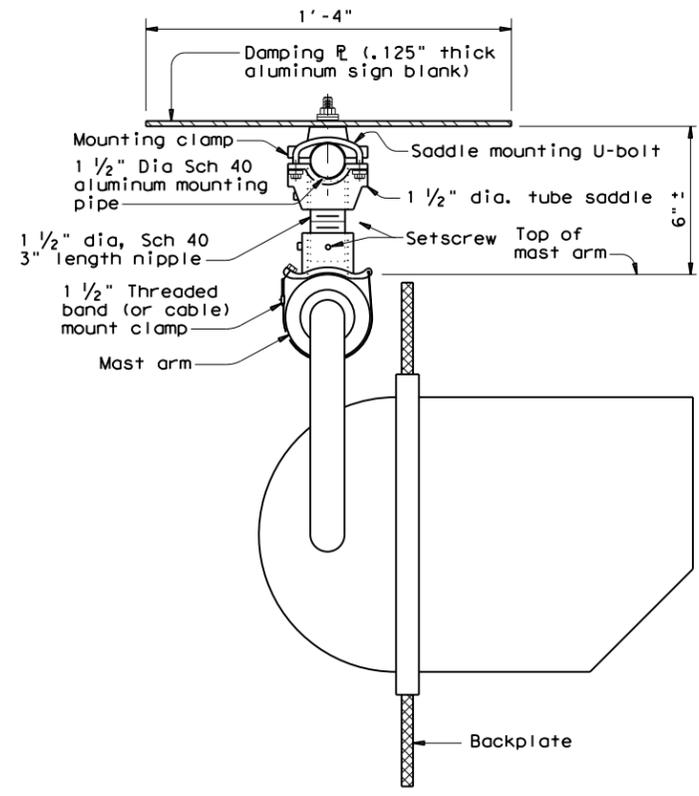

SECTION A-A

(Showing standard placement of signal head)
(Mounting clamp U-bolt is not shown for clarity)

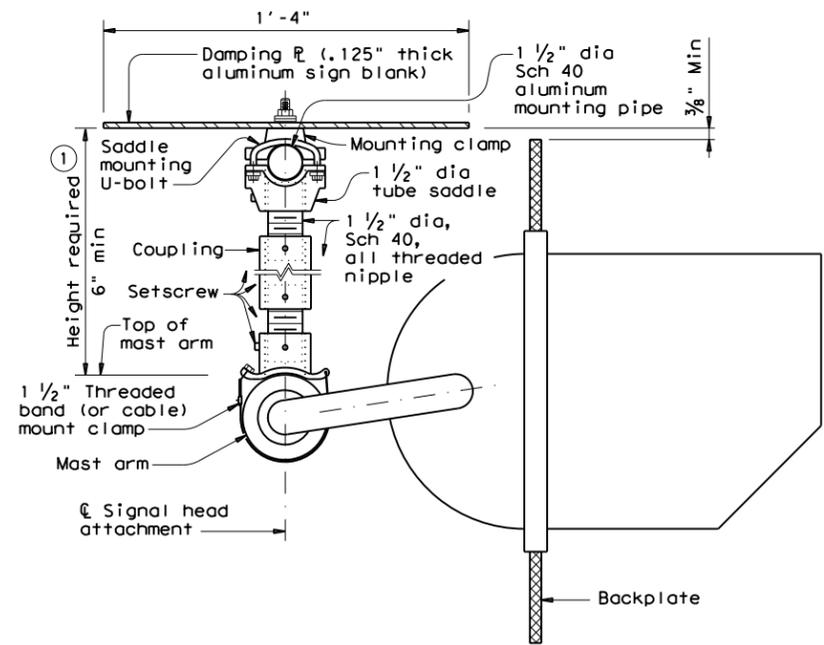

SECTION A-A


(Showing alternate placement of signal head)
(Mounting clamp U-bolt is not shown for clarity)

① Recommended supporting assemblies to achieve required height for horizontal section heads

Height required	One nipple each length	Two nipples each length plus One coupling each length	
6"-6 3/4"	3"	-	-
7"-8 1/2"	4"	-	-
9"-10 1/2"	6"	-	-
11"-15 1/2"	-	4"	5"
16"-24"	-	6"	10"

GENERAL NOTES:

- In accordance with the findings of TxDOT sponsored research, the installation of a damping plate in accordance with the details shown here at the end of signal mast arms of SMA and DMA standard structures reduces excessive harmonic vertical vibration, and thus fatigue damage. Any deviation from these details may reduce the effectiveness of this damping device.
- Aluminum sign blank for damping plate will conform to Departmental Material Specifications DMS-7110. Materials for mast arm mounting clamp and tube saddle will be aluminum castings or aluminum alloys as in accordance with manufacturers' stipulations. Mounting pipe, pipe nipple and coupling will be aluminum alloy 6061-T6 or 6063-T6. Damping plate mounting clamp and u-bolt assemblies will conform to Standard sheet SMD(GEN). U-bolts for saddle mounting will have a minimum yield strength of 36 ksi.
- Damping plate will be mounted horizontally. Position centerline of damping plate to align with centerline of mast arm or horizontal signal head assembly. Vertical clearance between signal head (with or without backing plate) and bottom of damping plate will be maintained as shown. The attachments shown here are examples only, other supporting details which meet both alignment and vertical clearance requirements are also acceptable.
- Unless stipulated by the manufacturers, all steel parts will be galvanized finish in accordance with Standard Specification Item 445, "Galvanizing".
- Contractor will verify applicable field dimensions before the installation.
- Backplates are optional for traffic signals. When backplates are used, Backplates will have a 2-inch fluorescent yellow AASHTO Type BFL or CFL retroreflective border conforming to TxDOT DMS-8300 "Sign Face Materials." See Sheet TS-BP-20 for backplate details.

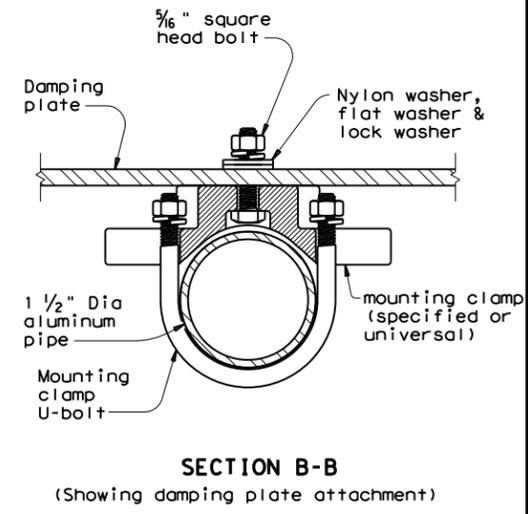

SECTION B-B

(Showing damping plate attachment)

Texas Department of Transportation Traffic Safety Division Standard


MAST ARM DAMPING PLATE DETAILS

MA-DPD-20


FILE: ma-dpd-20.dgn DWN: TxDOT CK: TxDOT DW: TxDOT CK: TxDOT
 © TxDOT January 2012 CONT SECT JOB HIGHWAY
 1392 01 044 ,etc FM 1378
 REVISIONS
 6-20 DIST COUNTY SHEET NO.
 18 COLLIN 283

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

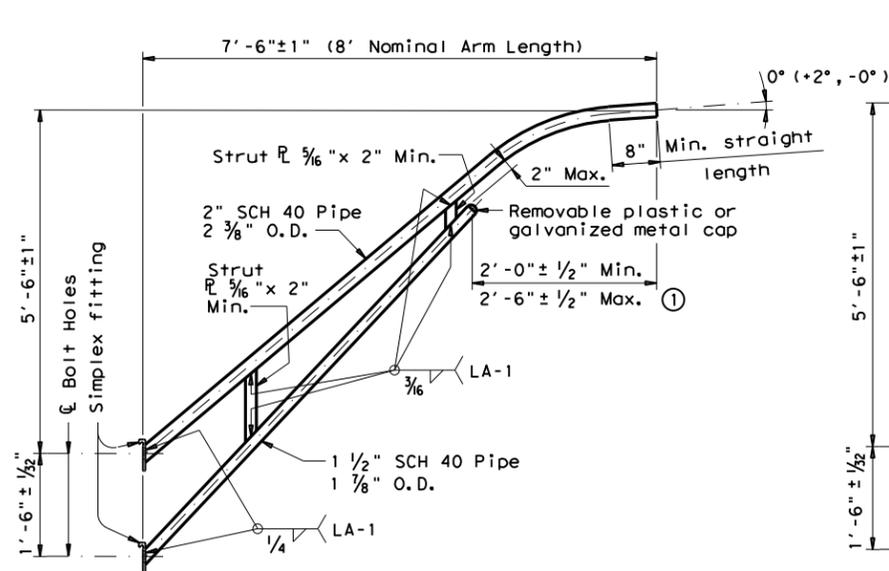


8-FOOT LUMINAIRE ARM

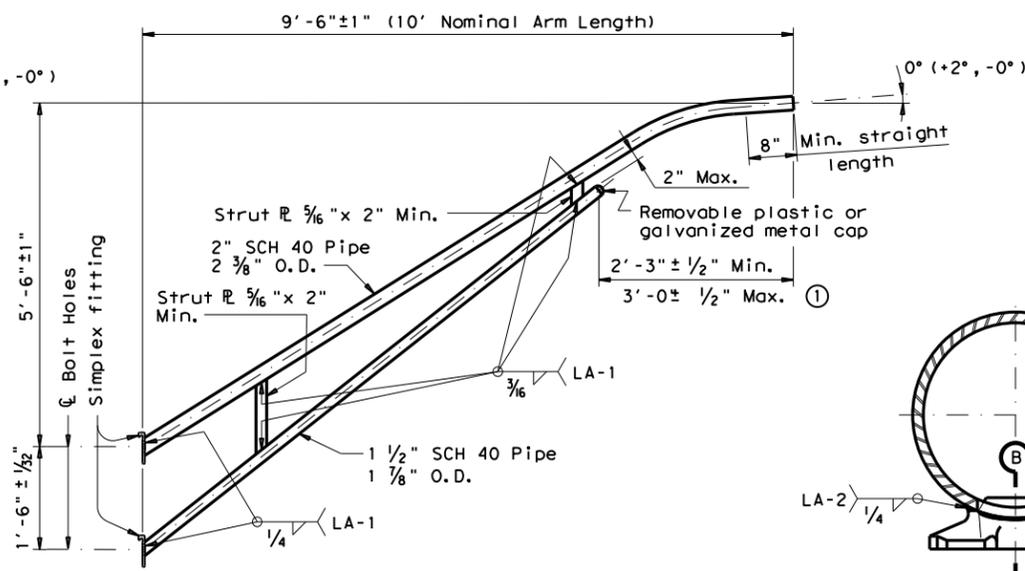

10-FOOT LUMINAIRE ARM




DIRECT ATTACHMENT DETAIL

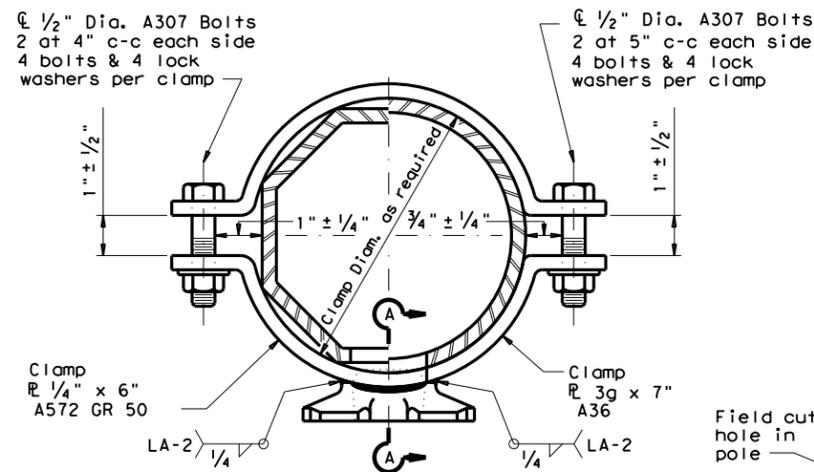


CLAMP ATTACHMENT DETAIL NO. 1 (HALF SECTION)

CLAMP ATTACHMENT DETAIL NO. 2 (HALF SECTION)

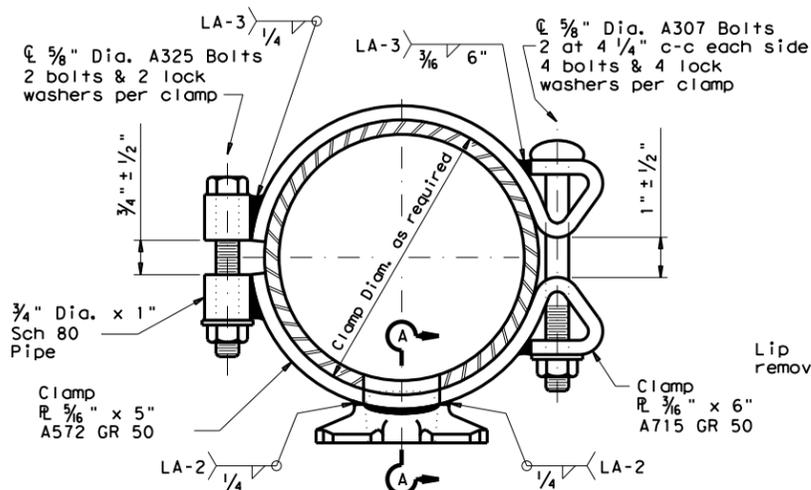


CLAMP ATTACHMENT DETAIL NO. 3 (HALF SECTION)

CLAMP ATTACHMENT DETAIL NO. 4 (HALF SECTION)

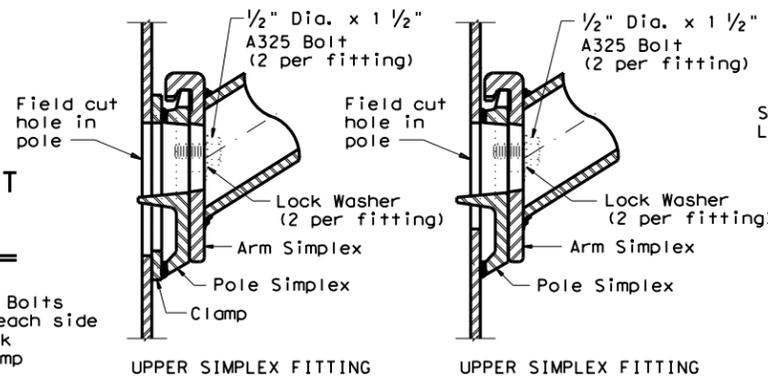


UPPER SIMPLEX FITTING

UPPER SIMPLEX FITTING

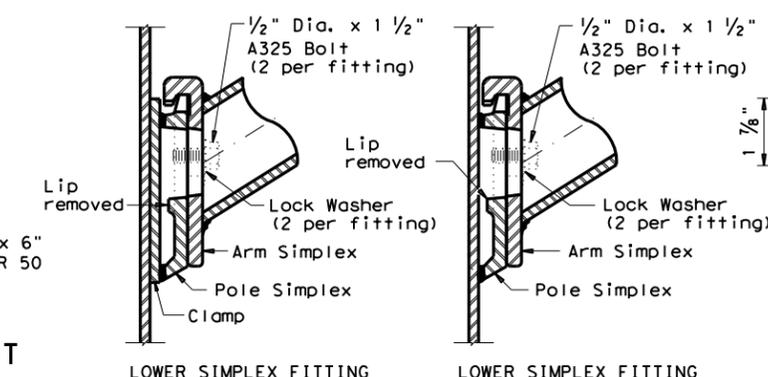


LOWER SIMPLEX FITTING

LOWER SIMPLEX FITTING

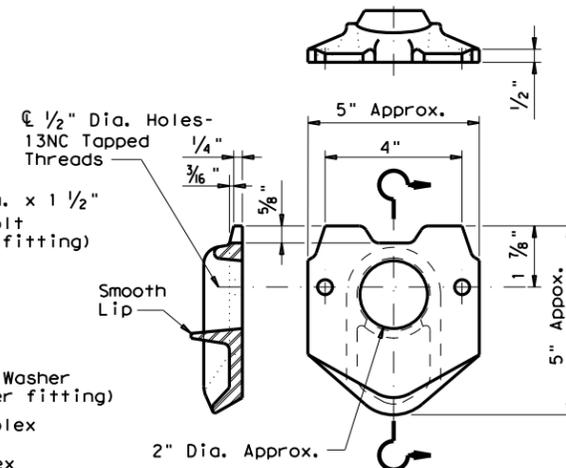

POLE SIMPLEX DETAIL

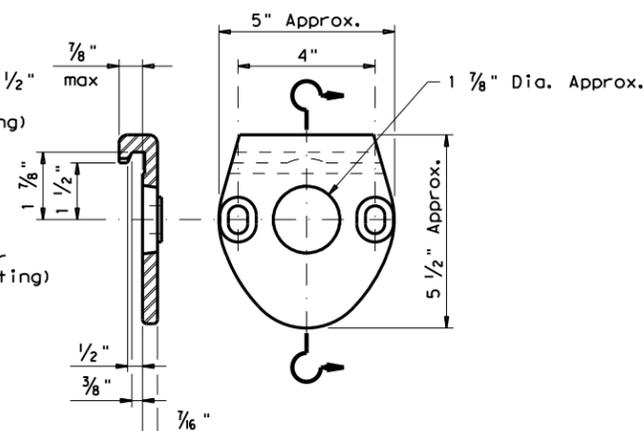

ARM SIMPLEX DETAIL

MATERIALS	
Pole or Arm Simplex	ASTM A27 Gr. 65-35 or A148 Gr. 80-50, A576 Gr. 1021 (3), or A36 (Arm only)
Arm Pipes	ASTM A53 Gr. B, A501, A1008 HSLAS-F Gr. 50 (4), or A1011 HSLAS-F Gr. 50 (4)
Arm Strut Plates (2)	ASTM A36, A572 Gr. 50 (4), or A588
Misc.	ASTM designations as noted

- Dimensional limits are given to show acceptable variation in design. All of a Fabricator's production of a particular arm length shall have the same dimensions within specified tolerances.
- Any of the materials listed for plates may be used where the drawings do not specify a particular ASTM designation.
- A576 must be suitable for forging and also meet minimum tensile strength of 65 ksi, minimum yield of 35 ksi, and elongation in 2 inches of 22 percent.
- ASTM A572, A1008 HSLAS-F, and A1011 HSLAS-F may have higher yield strengths but shall not have less elongation than the grade indicated.

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Revisions thereto. Design Wind Speed equals 90 mph plus a 1.3 gust factor. Arms are designed to support a 60 lb. luminaire having an effective projected area (actual area times drag coefficient) of 1.6 sq. ft.

Materials and fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. In the absence of specified Fabricator tolerances, dimensions shall be within the tolerances generally obtainable in normal fabrication practice.

Unless otherwise noted, all parts shall be galvanized after fabrication in accordance with Item 445, "Galvanizing".

Deviation from the details and dimensions shown herein require submission of shop drawings in accordance with Item 441, "Steel Structures". Alternate designs are not acceptable.


Each pole simplex fitting shall be supplied with 2 ASTM A325 bolts and 2 lock washers of the size specified. The bolts and lock washers shall be secured to the pole with the other hardware items called for in the plans. When clamp attachment is specified, the Fabricator shall ship the clamp assembly securely attached to the pole at the location shown on the plans.

If clamp assemblies are ordered without poles, the Fabricator shall ship one upper and one lower clamp assembly together in a single package, including all nuts and washers required for the clamps and simplex fittings.

Texas Department of Transportation
Traffic Operations Division
STANDARD ASSEMBLY DRAWINGS FOR LUMINAIRE SUPPORT STRUCTURES
ARM DETAILS
LUM-A-12





© TxDOT August 1995		DN: LEH	CK: JSY	DW: LTT	CK: TEB
5-96	REVISIONS	CONT	SECT	JOB	HIGHWAY
1-99		1392	01	044 ,etc	FM 1378
1-12		DIST	COUNTY		SHEET NO.
		18	COLLIN		284

RADAR DETECTION ZONE LOCATIONS

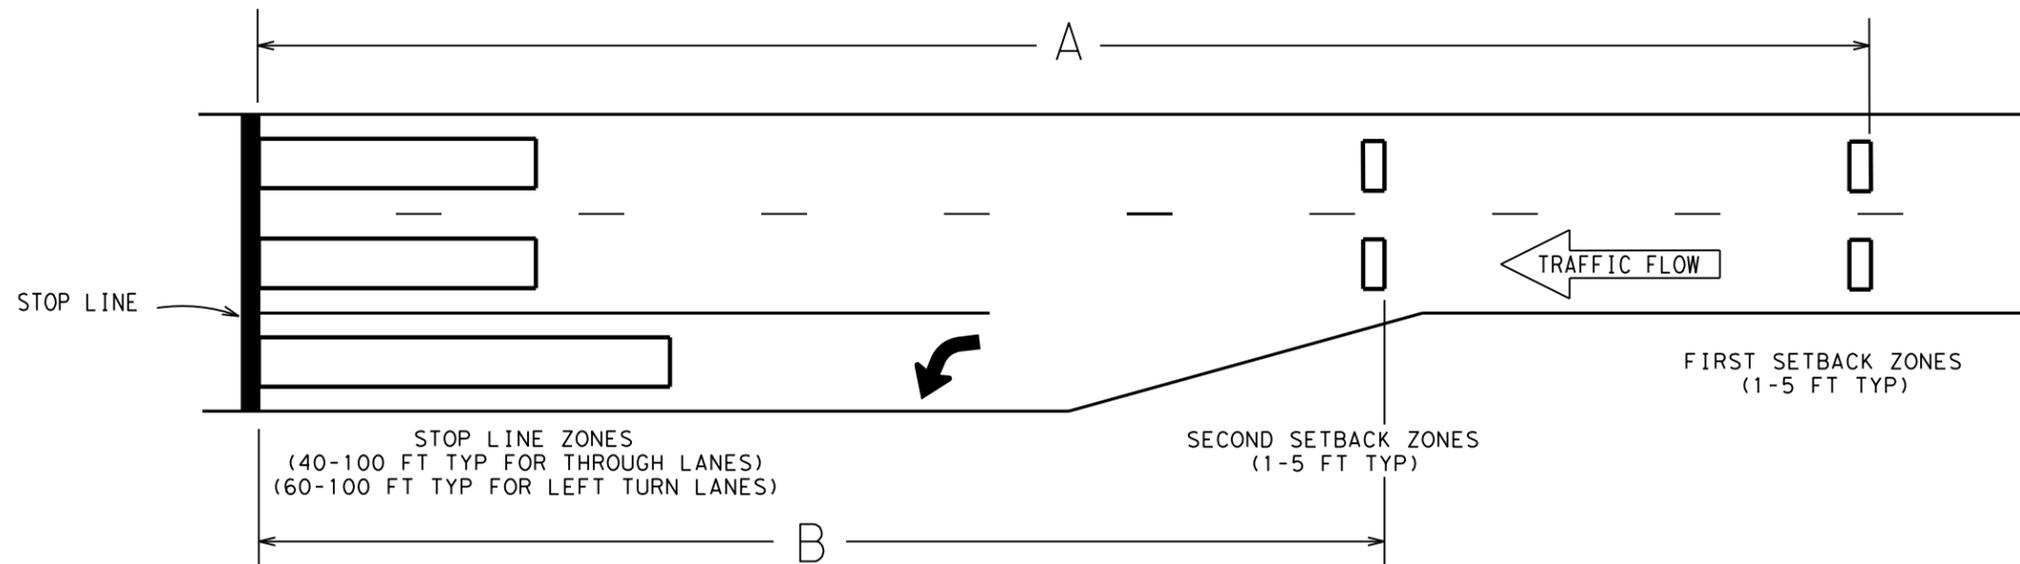

APPROACH SPEED LIMIT (MPH)	DISTANCE A (FT)	DISTANCE B (FT)	MINIMUM RANGE OF DETECTION (LF)
45	360	245	400
50	405	300	440
55	445	325	490
60	485	355	530
65	525	380	575
70	565	410	620

RADAR DETECTION INSTALLATION DETAILS

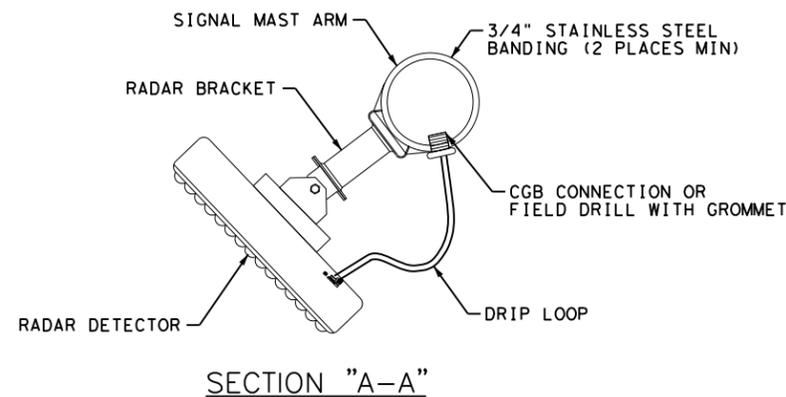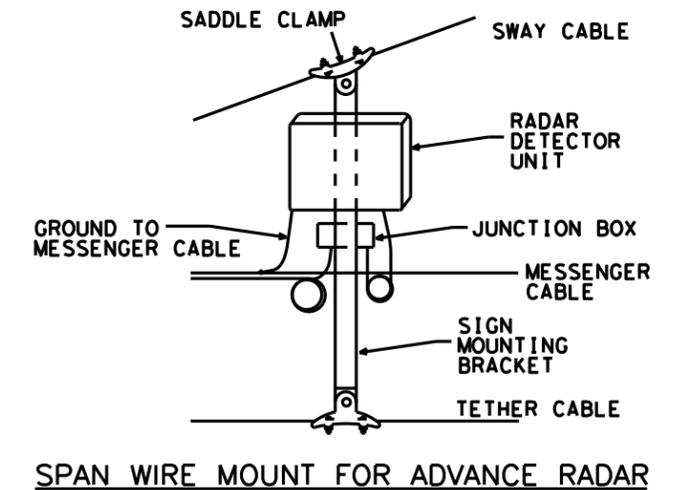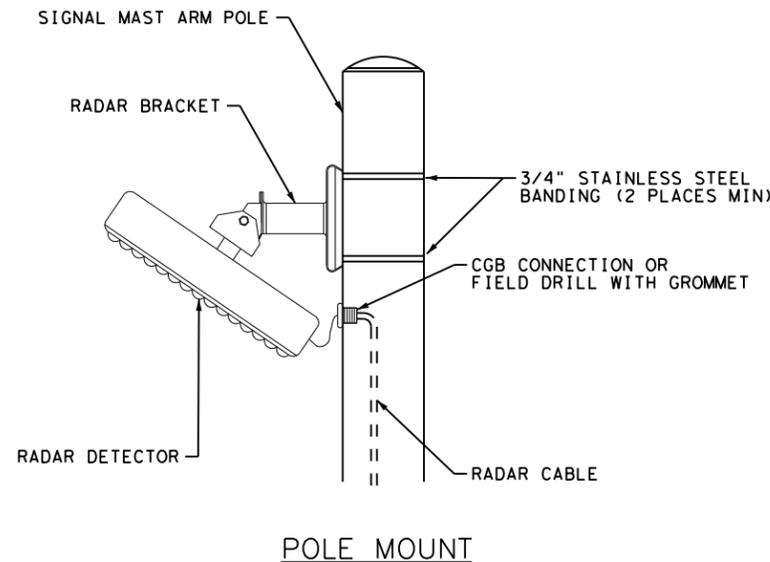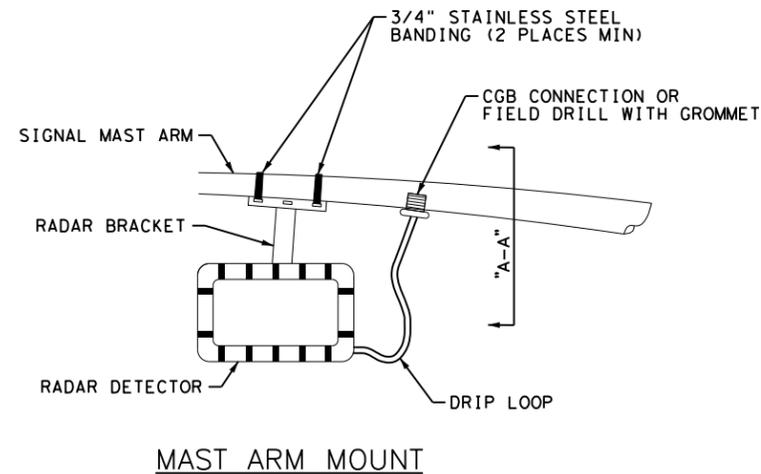

NOTES:


1. THE RADAR SENSOR MOUNTING BRACKET MUST BE ADJUSTABLE TO TILT UP, DOWN, LEFT, RIGHT, AND TO ROTATE.
2. THE RADAR DETECTOR UNITS SHOWN ARE NOT INTENDED TO REPRESENT ANY SPECIFIC BRAND OR PRODUCT, AND ALTERNATE MOUNTING METHODS MAY BE SUBMITTED FOR APPROVAL.

DALLAS DISTRICT STANDARD



RADAR VEHICLE DETECTION SYSTEM RVDS-18 (DAL)

© TxDOT May 2018		DR- EF	CK- - - -	DR- EF	CK- TRF-Aus.
REVISIONS	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.	
	6	(SEE TITLE SHEET)		FM 1378	
	STATE	DISTRICT	COUNTY	SHEET NO.	
	TEXAS	18	COLLIN	286	
	CONTROL	SECTION	JOB		
	1392	01	044 ,etc		

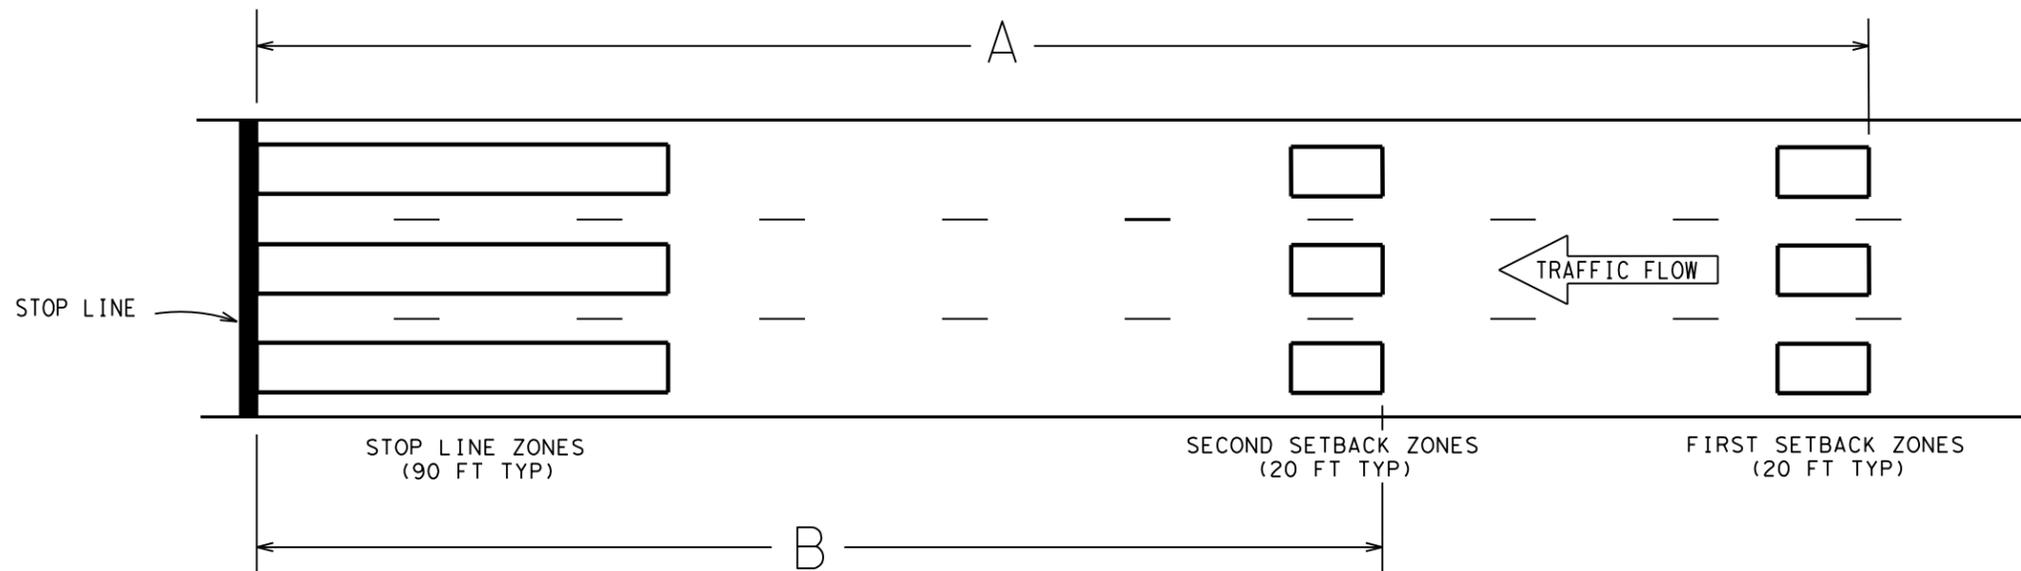

APPROACH SPEED LIMIT (MPH)	DISTANCE ² BETWEEN CAMERA AND STOP LINE (FT)	DISTANCE ¹ A (FT)	CAMERA HEIGHT (FT)									
			24	28	32	36	40	24	28	32	36	40
			DISTANCE B (FT)					EXTENSION ON 2ND DET. ZONE (SEC.)				
60	80	470	280	295	305	310	315	0.0	0.0	0.0	0.5	0.5
	150	470	270	285	295	300	310	0.0	0.0	0.0	0.0	0.5
55	80	430	255	265	275	280	285	0.0	0.0	0.0	0.5	0.5
	150	430	245	255	265	275	280	0.0	0.0	0.0	0.0	0.5
50	80	390	235	245	250	255	260	0.0	0.0	0.5	0.5	0.5
	150	390	220	230	240	245	250	0.0	0.0	0.0	0.0	0.5
45	80	350	210	215	220	225	230	0.0	0.0	0.5	0.5	0.5
	150	350	190	200	210	215	220	0.0	0.0	0.0	0.0	0.5

- Distances shown are based on a 20' detection zone and a 1.0 second passage time setting.
- Distance between the camera and the stop line, as measured parallel to the direction of travel.

DALLAS DISTRICT STANDARD




VIDEO DETECTION ZONE PLACEMENT
VDZ-04 (DAL)


© TxDOT September 2004		DR- THW	CR- CDB	DR- BES	CR- TRF-Aus.
REVISIONS	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.	
	6	(SEE TITLE SHEET)		FM 1378	
	STATE	DISTRICT	COUNTY		SHEET NO.
	TEXAS	18	COLLIN		287
	CONTROL	SECTION	JOB		
	1392	01	044, etc		

NOTES:


1. INSTALL 1/2" ALL THREAD NIPPLE WITH BONDING BUSHINGS ON BOTH ENDS AND 6 EA OF 1/2" X 1/2" 13 UNC MOUNTING BOLTS BETWEEN THE TWO CABINETS (SIGNAL AND BBU).
2. INSTALL 2" FITTING FOR EVP CABLES/WIRES AND 4 EA OF 1/2" X 1/2" 13 UNC MOUNTING BOLTS BETWEEN THE TWO CABINETS (SIGNAL AND EVP).
3. USE SILICON SEALANT TO SEAL BETWEEN THE CABINETS OF THE CONTROLLER, EVP AND BBU UNIT.
4. THE ABOVE WORK PERFORMED AND MATERIALS FURNISHED WILL NOT BE PAID FOR DIRECTLY, BUT WILL BE SUBSIDIARY TO PERTINENT ITEMS.

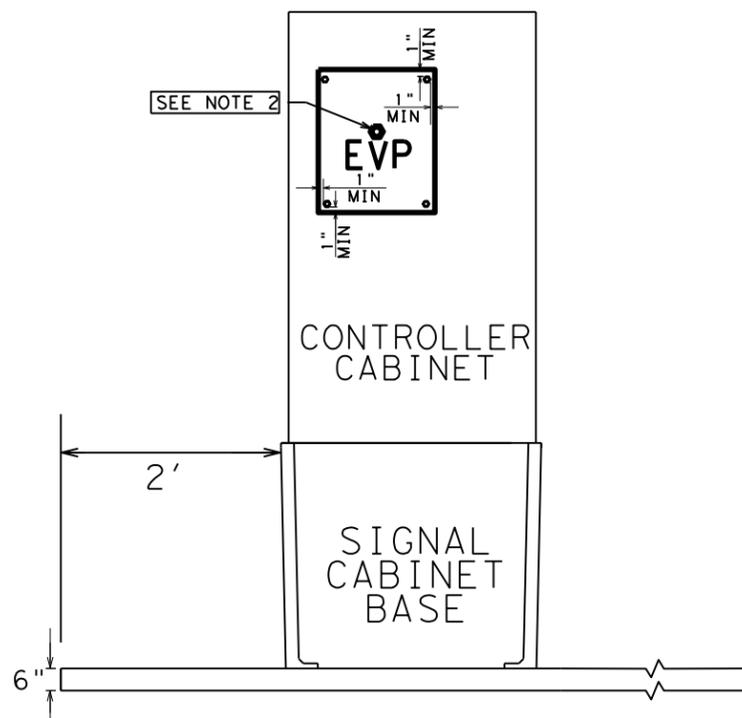

SIDE VIEW
(EVP)

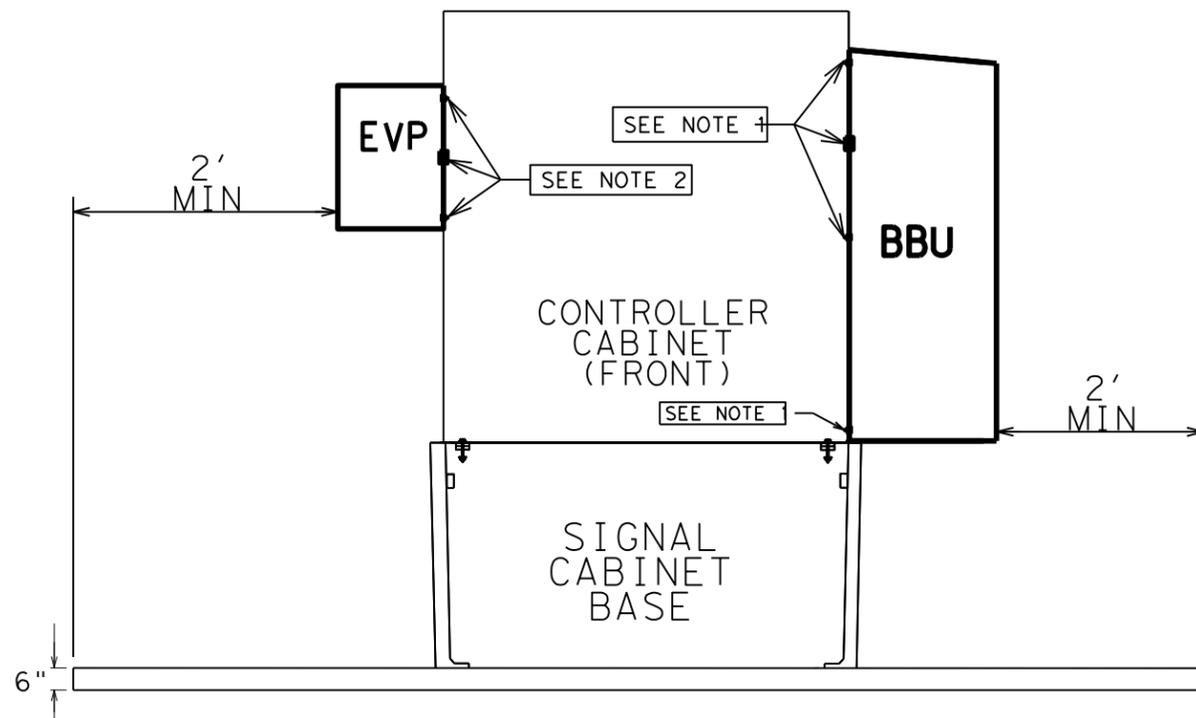

ELEVATION VIEW

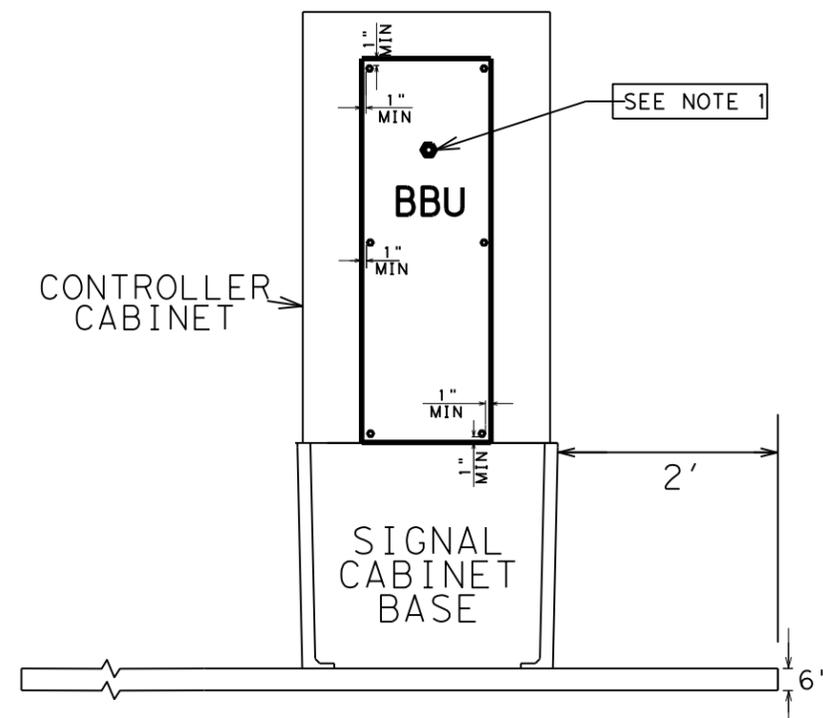


SIDE VIEW
(BBU)

REQUIRED CABLE/CONDUCTORS FOR EVP			
QUANTITY EACH	WIRE SIZE	COLOR	FUNCTION
1	#14	BLACK	120 VAC FOR EVP
1	#14	RED	120 VAC FOR FAN & CABINET LIGHT
1	#14	WHITE	AC NEUTRAL
1	#14	GREEN	CHASIS GROUND
1	#18	GRAY	LOGIC GROUND
4	#18	BLUE	PREEMPT COMMANDS
4	-	-	CABLE FROM DETECTOR UNIT

REQUIRED CONDUCTORS FOR BBU			
QUANTITY EACH	WIRE SIZE	COLOR	FUNCTION
1	-	BLACK	120 VAC FROM SERVICE
1	-	WHITE	AC NEUTRAL FROM SERVICE
1	#6	BLACK	120 VAC TO CONTROLLER
1	#6	WHITE	AC NEUTRAL TO CONTROLLER
1	#6	GREEN	GROUND

LEGEND:
EVP-EMERGENCY VEHICLE PREEMPTION CABINET.
BBU-BATTERY BACKUP UNIT.

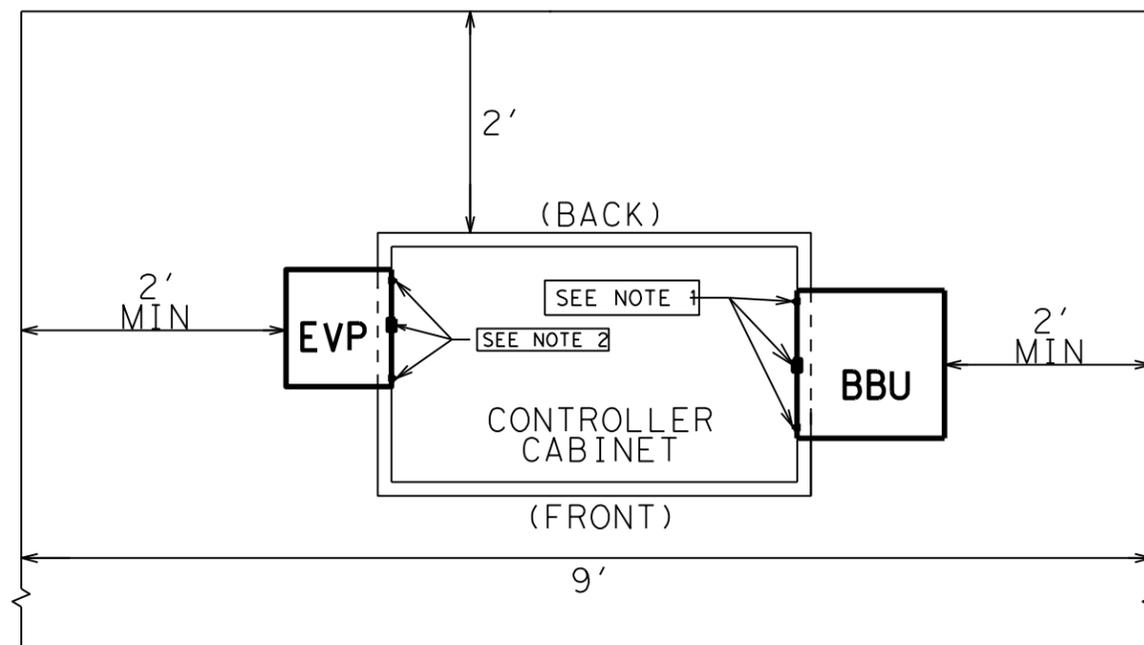


PLAN VIEW




INSTALLATION OF BBU/EVP
EXTERNAL SIDE MOUNT CABINET
INSTALLATION DETAILS
DALLAS DISTRICT STANDARD


N. T. S.			SHEET 1 OF 3
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.	
6	(SEE TITLE SHEET)	FM 1378	
STATE	DISTRICT	COUNTY	SHEET NO.
TEXAS	DAL	COLLIN	288
CONTROL	SECTION	JOB	
1392	01	044 ,etc	

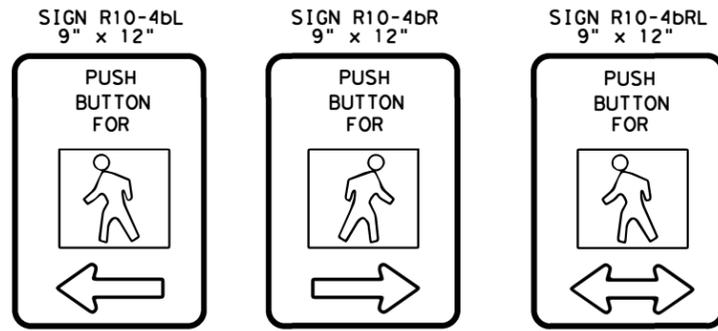


PEDESTRIAN PUSHBUTTON SIGN DETAILS

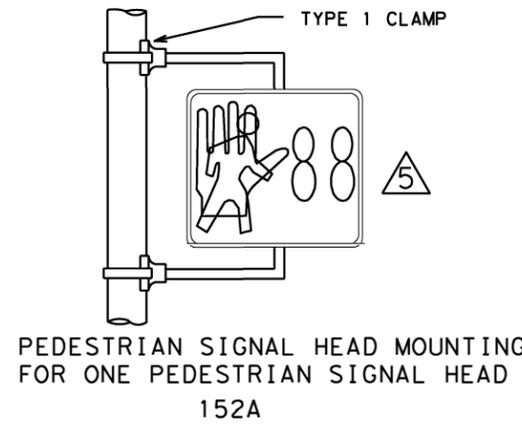


PEDESTRIAN SIGNAL HEAD MOUNTING FOR ONE PEDESTRIAN SIGNAL HEAD 152A

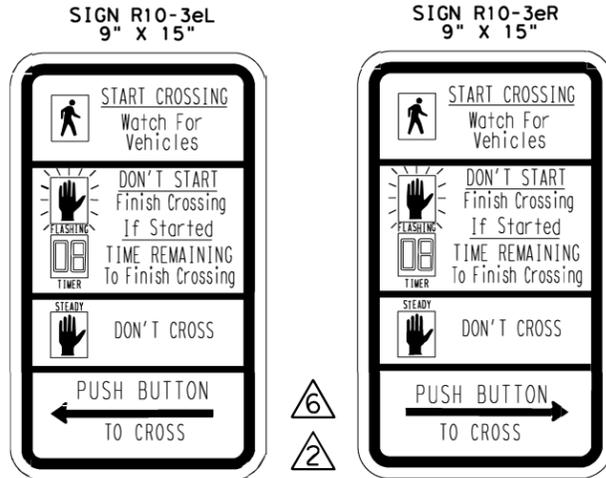


COUNTDOWN PEDESTRIAN PUSHBUTTON SIGN DETAILS

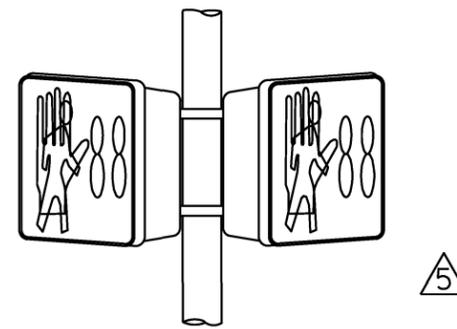


PEDESTRIAN SIGNAL HEAD MOUNTING FOR TWO PEDESTRIAN SIGNAL HEADS 143C

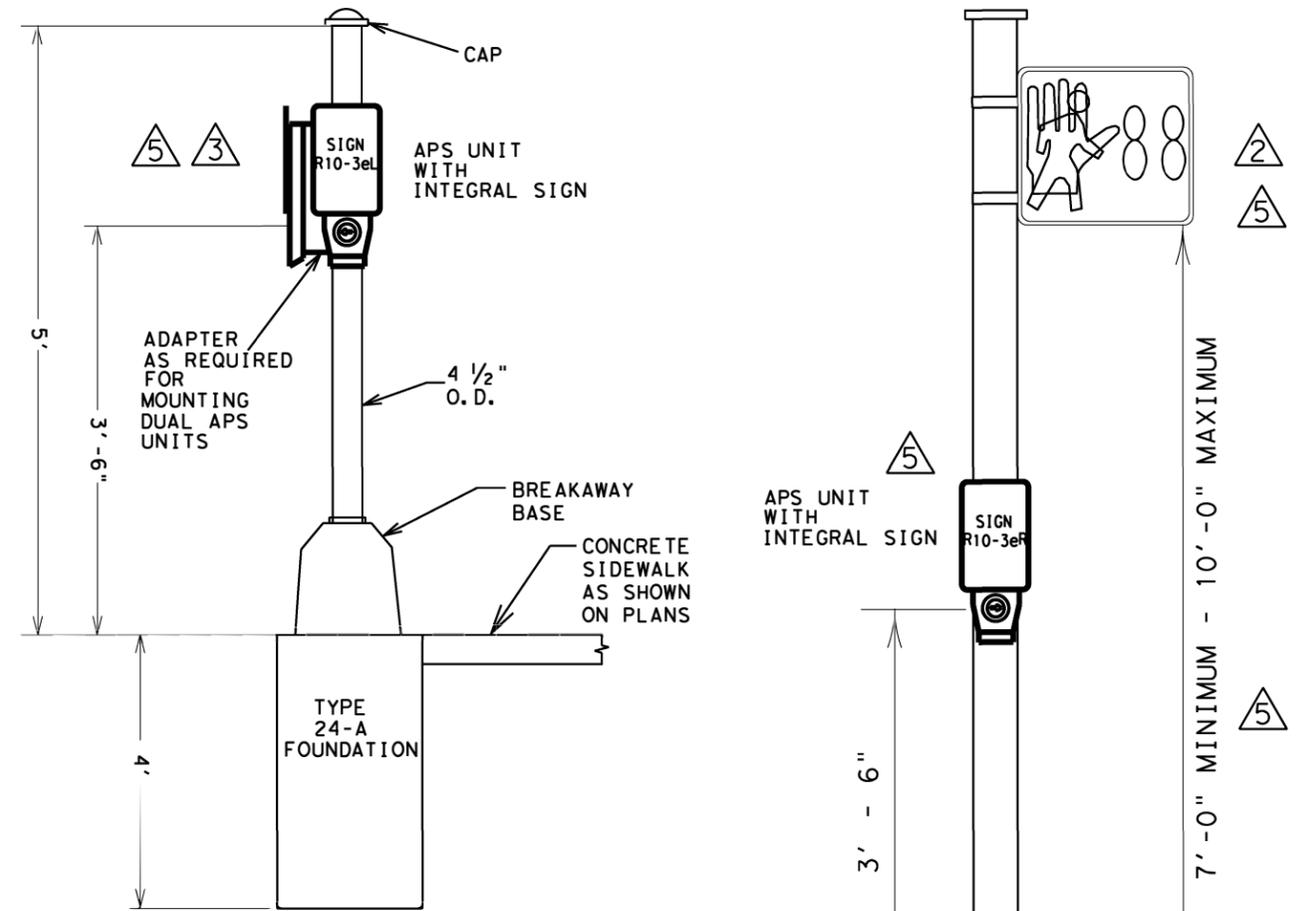

PEDESTRIAN PUSH BUTTON POLE

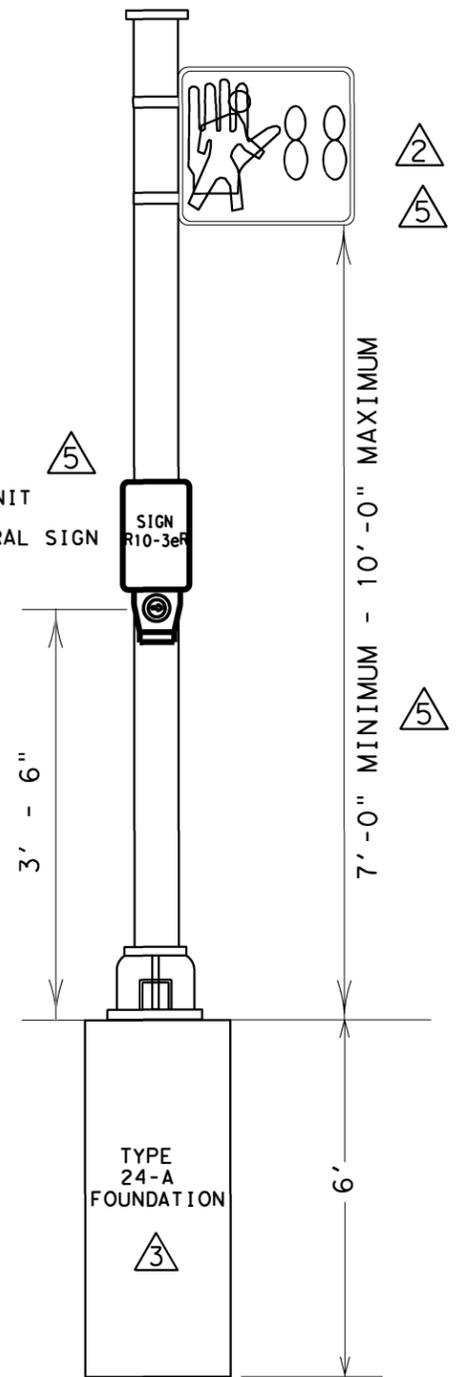

PEDESTAL POLE

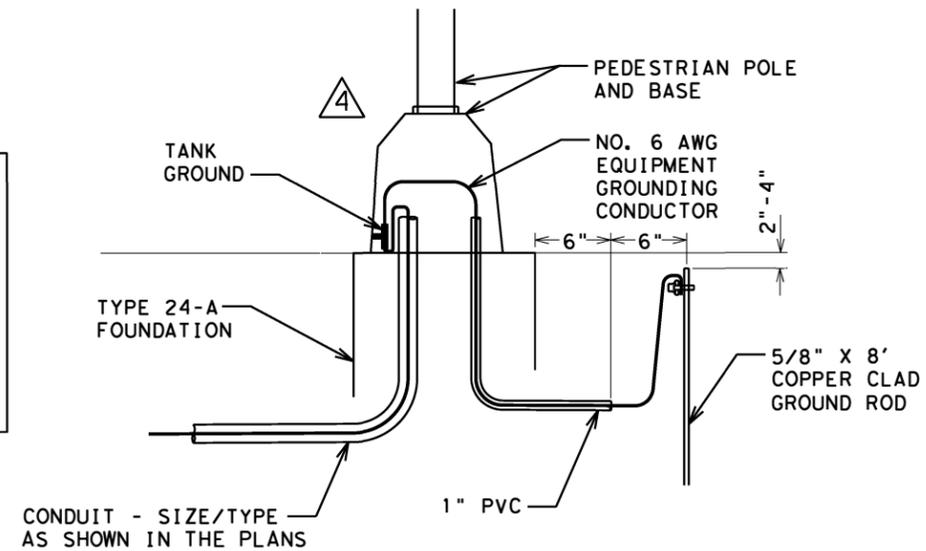


PEDESTRIAN PUSH BUTTON POLE GROUNDING DETAILS

NOTE:
THE POLES ON THIS DRAWING ARE SHOWN AS AN EXAMPLE ONLY. POLES OF SIMILAR DESIGN FOR ANY CROSS SECTION WHICH MEET THE SPECIFICATIONS AND REQUIREMENTS SHOWN ON THESE DRAWINGS AND ARE APPROVED BY THE ENGINEER WILL BE DEEMED ACCEPTABLE.

1 NOTE: EITHER TYPE 1 CLAMPS OR CLAM SHELL MOUNTING HARDWARE MAY BE USED AS APPROVED BY THE ENGINEER. FOR CLAM SHELLS, USE ICC P/N 4805 OR McCAIN QUICKMOUNT OR APPROVED EQUAL.

- 1 ALTERNATIVE MOUNTING METHOD revised 12-92
- 2 ALTERNATIVE PEDESTRIAN SIGNAL HEAD AND SIGNING revised 10-08
- 3 PEDESTRIAN PUSH BUTTON POLE revised 01-11
- 4 PEDESTRIAN PUSH BUTTON POLE GROUNDING DETAILS revised 09-15
- 5 APS UNIT ADDED "SYMBOLS ONLY" PEDESTRIAN SIGNAL HEAD REMOVED MOUNTING HARDWARE NOTES REVISED MOUNTING HEIGHT REVISED revised 06-17
- 6 APS SIGN REVISED revised 11-20









- NOTES:
- 1. ALL PEDESTRIAN SIGNAL HEADS SHALL BE INSTALLED ON THE AWAY-FROM-TRAFFIC SIDE OF THE PEDESTAL OR MAST ARM POLE.
 - 2. ALL WIRING FOR PEDESTRIAN SIGNALS SHALL BE TOTALLY ENCLOSED WITHIN THE SIGNAL MOUNTING HARDWARE.
 - 3. ALL PEDESTRIAN SIGNAL HEADS AND PUSH BUTTON SIGNS SHALL DISPLAY THE SYMBOLIZED MESSAGES SHOWN ABOVE.

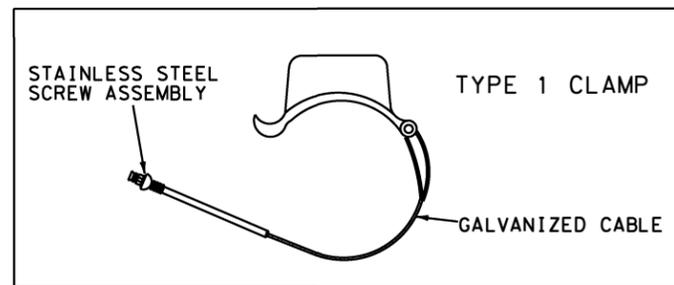




PEDESTRIAN SIGNAL HEAD DETAILS (DAL)

© TXDOT 2020
DALLAS DISTRICT STANDARD

FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
6	(SEE TITLE SHEET)	289
STATE	STATE DIST.	COUNTY
TEXAS	18	COLLIN
CONT.	SECT.	JOB HIGHWAY NO.
1392	01	044,etc FM 1378

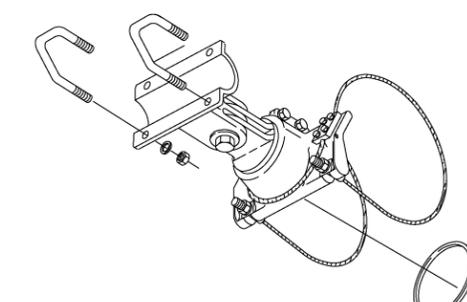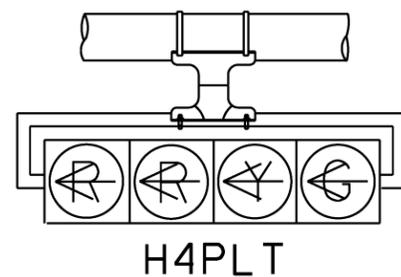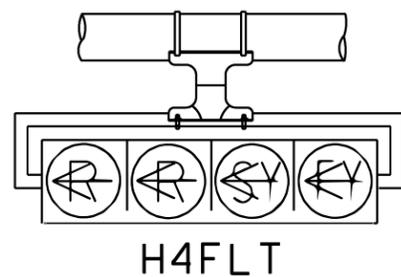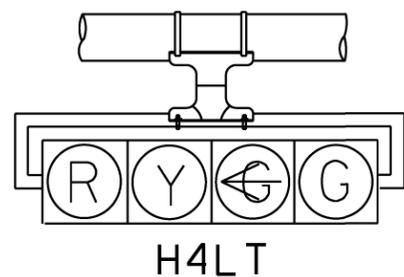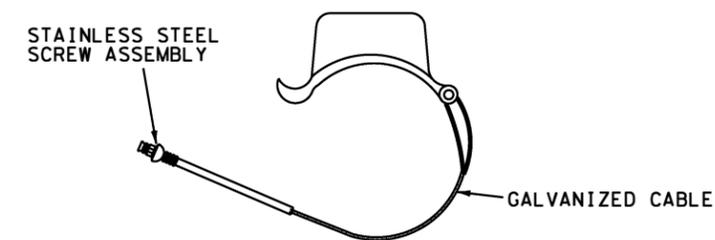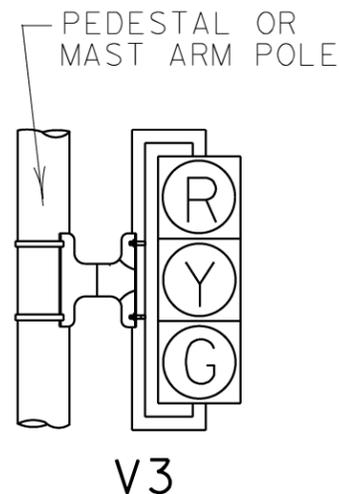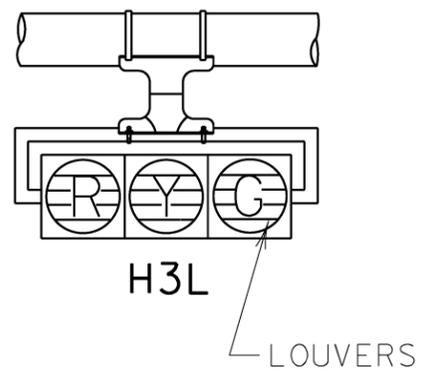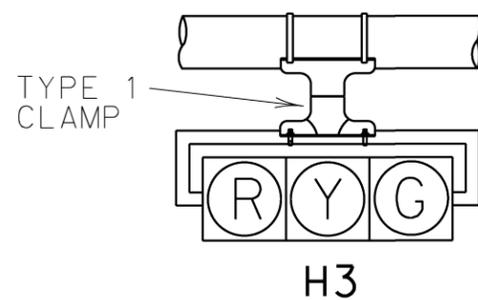

SHALL BE INSTALLED WHEN ROTATION ABOUT THE HORIZONTAL AND VERTICAL AXES ARE NEEDED.

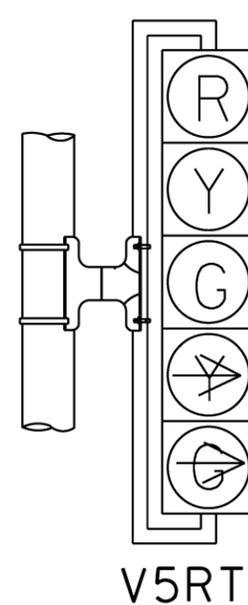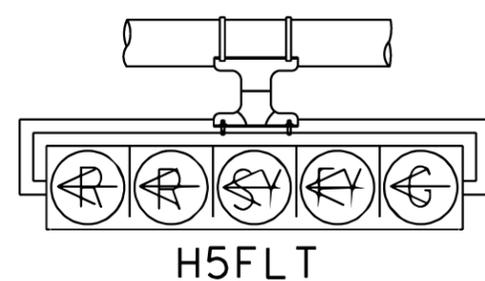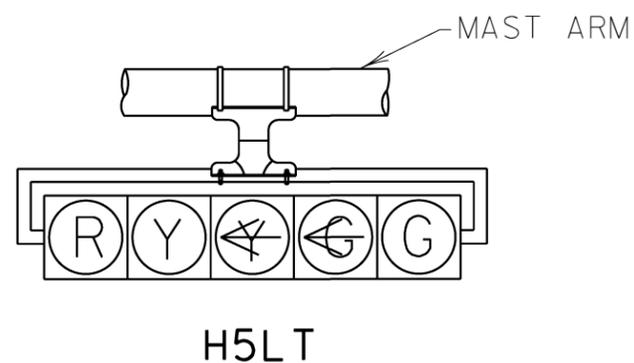

NOTES:

1. VEHICLE SIGNAL HEADS SHALL BE MOUNTED WITH TYPE 1 CLAMP AND APPROPRIATE TUBING.
2. ALL POLE MOUNTED VEHICLE HEADS SHALL BE INSTALLED ON THE AWAY-FROM-TRAFFIC SIDE OF THE PEDESTAL OR MAST ARM POLE.
3. THE SIGNAL HEADS SHOWN ARE NOT MEANT TO REFLECT ALL POSSIBLE SIGNAL HEADS, BUT ARE REPRESENTATIVE OF SIGNAL HEADS COMMONLY IN USE. SEE THE TRAFFIC SIGNAL LAYOUT FOR REQUIRED SIGNAL HEADS, AND THE NUMBER AND ORIENTATION OF LOUVERS.

TRAFFIC SIGNAL HEAD DETAILS (DAL)

© TXDOT 2018
DALLAS DISTRICT STANDARD


FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
6	(SEE TITLE SHEET)	290
STATE	STATE DIST.	COUNTY
TEXAS	DALLAS	COLLIN
CONT.	SECT.	JOB HIGHWAY NO.
1392	01	044, etc. TU 13R



COMPRESSION FITTING

SOURCES:
RELIABLE ELECTRIC NO. 5264
FARGO NO. OR EQUAL

MINIMUM 1" SEPARATION FROM
SIGNAL HEAD MOUNTING BRACKET

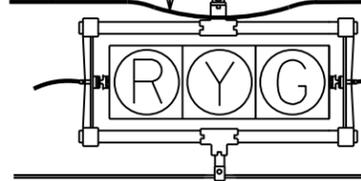

1/4" STRANDED STEEL CABLE

1/2" BLACK PLASTIC CABLE STRAPS OR
MESSENGER RINGS AT 12" CTRS.




THIMBLEYE BOLT (Angle Type)

SOURCES:
HUBBELL POWER SYS. NO. 5016
MCLEAN POWER SYS. NO. J8154
OR EQUAL




EYE NUTS (Twineye & tripeye)

SOURCES:
HUBBELL POWER SYS. NO. 6560 (TWIN), 6510 (SINGLE)
MCLEAN POWER SYS. NO. J6515 (TWIN), J6510 (SINGLE)
OR EQUAL




8-WAY ANCHOR

SOURCES:
HUBBELL POWER SYS. NO. 1283
MCLEAN POWER SYS. NO. J0283
OR EQUAL




LIFT PLATE

SOURCES:
HUBBELL POWER SYS. NO. 7898
MCLEAN POWER SYS. NO. J7890
OR EQUAL




GUY CLAMP (3-Bolt)

6" HEAVY GUY CLAMP WITH 3-5/8"
BOLTS OR RELIABLE ELECTRIC
STRANDVISE WITH FLEXIBLE BAIL
(NO. 5264), FARGO STRANDVISE,
HUBBELL POWER SYS. NO. 6460,
OR EQUAL

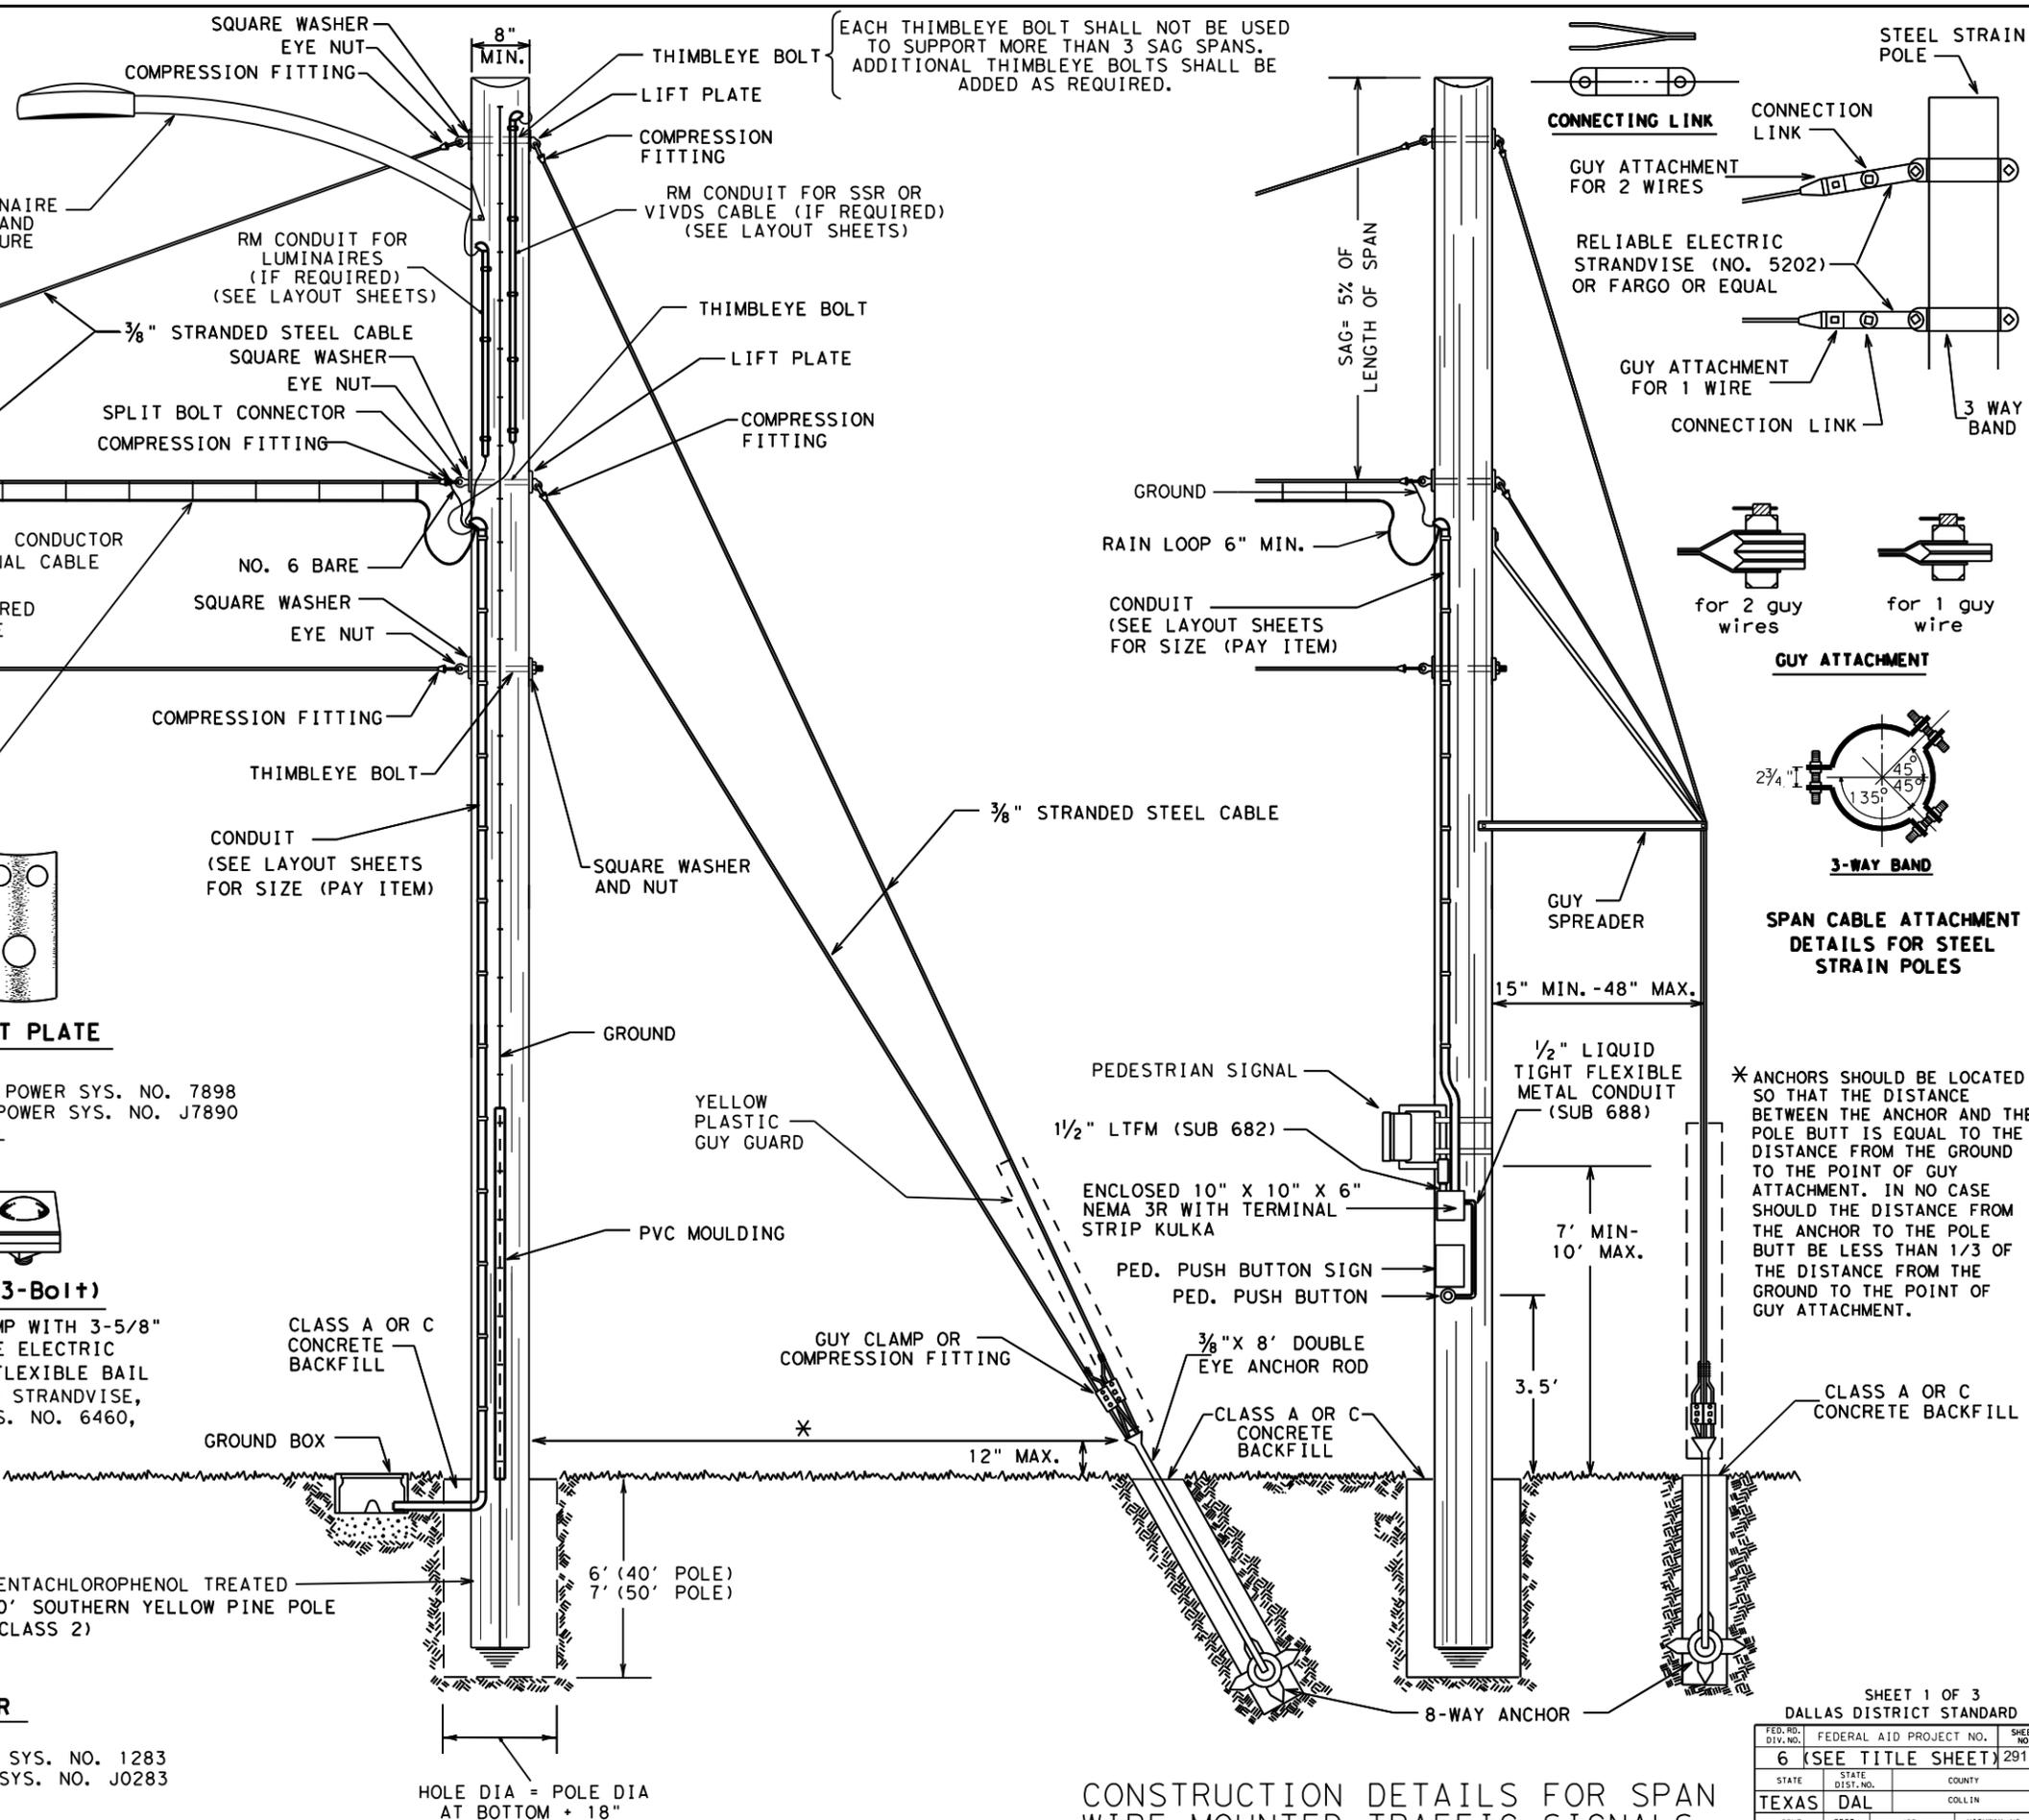

EACH THIMBLEYE BOLT SHALL NOT BE USED
TO SUPPORT MORE THAN 3 SAG SPANS.
ADDITIONAL THIMBLEYE BOLTS SHALL BE
ADDED AS REQUIRED.

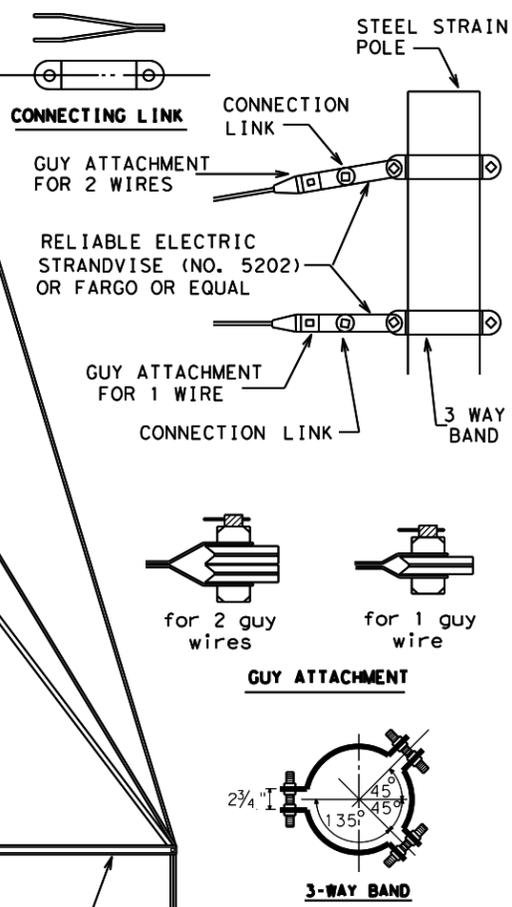

**SPAN CABLE ATTACHMENT
DETAILS FOR STEEL
STRAIN POLES**


* ANCHORS SHOULD BE LOCATED
SO THAT THE DISTANCE
BETWEEN THE ANCHOR AND THE
POLE BUTT IS EQUAL TO THE
DISTANCE FROM THE GROUND
TO THE POINT OF GUY
ATTACHMENT. IN NO CASE
SHOULD THE DISTANCE FROM
THE ANCHOR TO THE POLE
BUTT BE LESS THAN 1/3 OF
THE DISTANCE FROM THE
GROUND TO THE POINT OF
GUY ATTACHMENT.

**CONSTRUCTION DETAILS FOR SPAN
WIRE MOUNTED TRAFFIC SIGNALS**


SHEET 1 OF 3
DALLAS DISTRICT STANDARD

FED. RD. DIST. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
6	(SEE TITLE SHEET) 291	
STATE	DIST. NO.	COUNTY
TEXAS	DAL	COLLIN
CONT.	SECT.	JOB
1392	01	044, etc.
		HIGHWAY NO.
		FM 1378


**BOTTOM TETHERED, SPAN WIRE
SIGNAL HEAD HARDWARE
ASSEMBLY (BACKPLATE NOT SHOWN)**

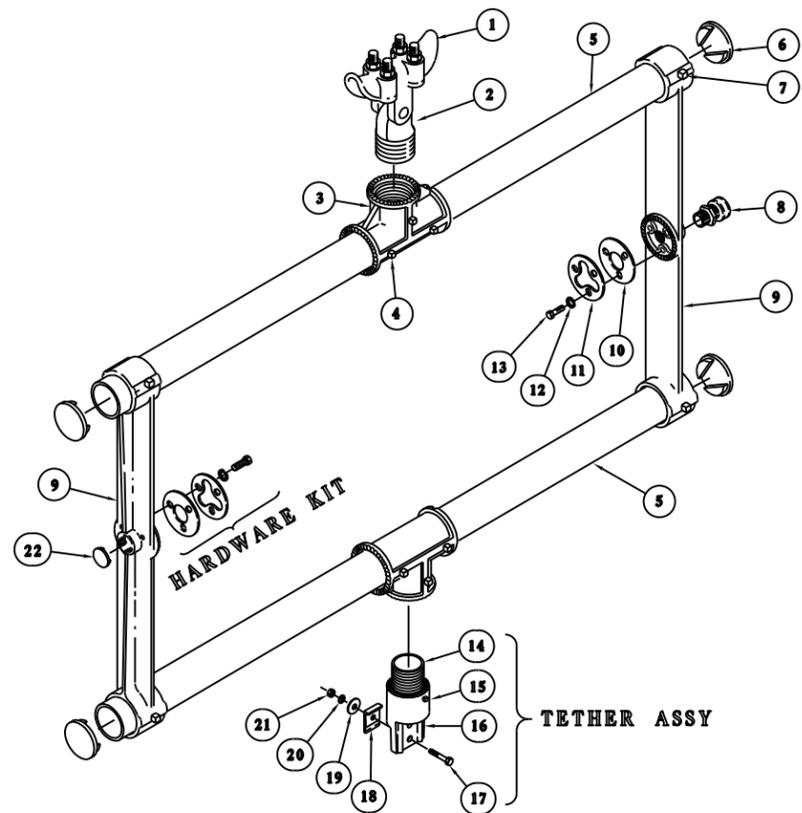

ITEM	DESCRIPTION	QTY
1	SPAN WIRE CLAMP, IRON, W/ U-BOLTS	1
2	SPAN WIRE ADAPTER, ALUM W/ STAINLESS BUSHING	1
3	TEE HORIZONTAL SLIP, DIE CAST ALUM	2
4	SCREW, SET SQ HD, 1/4"-20 X 1/2", STAINLESS	6
5	TUBE, 1/2" X LENGTH, ALUM	2
6	TUBE CAP, 1/2", PLASTIC	4
7	SCREW, SET SQ HD, 5/16"-18 X 5/8", STAINLESS	8
8	CGB, 3/4" .55-.65, ZINC 1	1
9	CAST ARM, FOR HORIZONTAL MOUNTED SIGNAL, ALUM	2
10	GASKET, TRI-BOLT, 1/16" X 70 DURO NEOPRENE	2
11	WASHER, SLOTTED, ZINC 2	2
12	WASHER, LOCK SPLIT, 1/4", STAINLESS	6
13	BOLT, HEX HD, 1/4"-20 X 1/2", GRADE 5, STAINLESS	6
14	NIPPLE, ALLTHREAD, 1/2" NPS X 2.13", ALUM	1
15	SCREW, SET SQ HD, 1/4"-20 X 5/8", STAINLESS	1
16	BODY, 1/2", HANGER, ALUM	1
17	BOLT, HEX HD, 5/16"-18 X 1 1/2", STAINLESS	1
18	PLATE, TETHER, 1-HOLE, ALUM	1
19	WASHER, FENDER, 5/16", STAINLESS	1
20	WASHER, SPLIT LOCK, 5/16", STAINLESS	1
21	NUT, HEX HD, 5/16"-18, STAINLESS	1
22	CAP, EN-3/4, BLUE (FOR CGB)	1

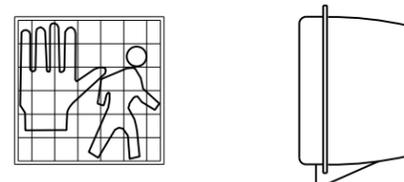


"EGGCRATE" VISOR PEDESTRIAN SIGNAL
WITH ONE-PIECE REFLECTOR

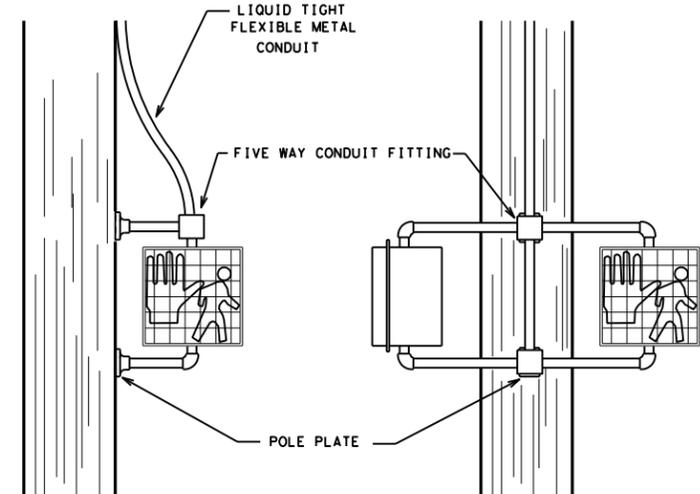

152A
ONE-WAY
ADJUSTABLE FACE SIGNAL FOR
WOOD POLE MOUNTING

143C
TWO-WAY
ADJUSTABLE FACE SIGNAL FOR
WOOD POLE MOUNTING




143C
PLAN VIEW


SIGN R10-4bR
SIGN R10-4bL
9"X12"




PEDESTRIAN PUSHBUTTON
SIGN DETAILS




H5LT
TYPICAL SPAN WIRE
HORIZONTAL MOUNT
INSTALLATION




H4LT
TYPICAL SPAN WIRE
HORIZONTAL MOUNT
INSTALLATION




H3
TYPICAL SPAN WIRE
HORIZONTAL MOUNT
INSTALLATION

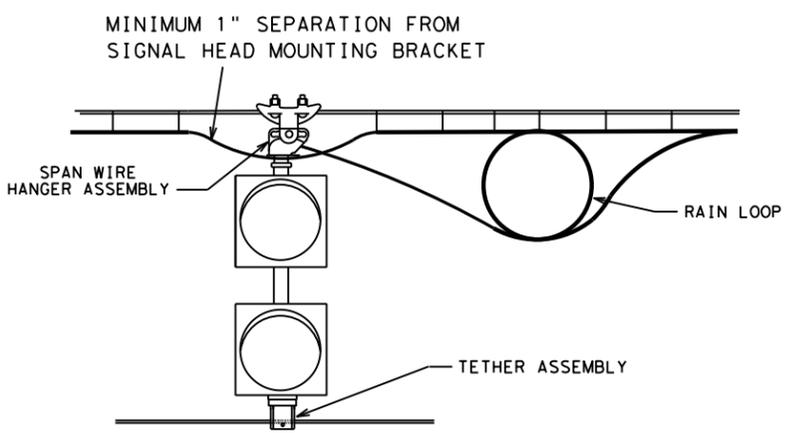

**TYPICAL
ONE-WAY FLASHING BEACON
INSTALLATION**

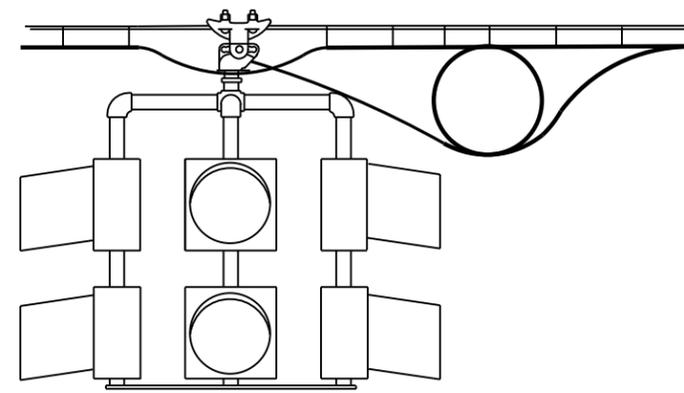

**TYPICAL
FOUR-WAY FLASHING BEACON
INSTALLATION**


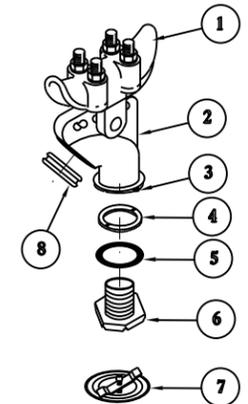


SPAN WIRE FLASHING BEACON
SIGNAL HEAD HANGER ASSEMBLY

**SPAN WIRE FLASHING BEACON
SIGNAL HEAD HANGER ASSEMBLY**

ITEM	DESCRIPTION	QTY
1	SPAN WIRE CLAMP, IRON, W/ U-BOLTS	1
2	WIRE OUTLET BODY, 3/4", ALUM	1
3	SET SCREW, SQUARE HD, CUP POINT, 1/4"-20X5/8", TYPE 304 STAINLESS	1
4	LOCKRING, SERRATED, 380 DIE CAST ALUM	1
5	GASKET, 70 DURO NEOPRENE	1
6	NIPPLE, HEX, 1-1/2" NPS, ALUM	1
7	KIT, SIGNAL CLOSURE	1
8	GROMMET, 1-1/2", W/ DIAPHRAGM	1

CONSTRUCTION DETAILS FOR SPAN
WIRE MOUNTED TRAFFIC SIGNALS

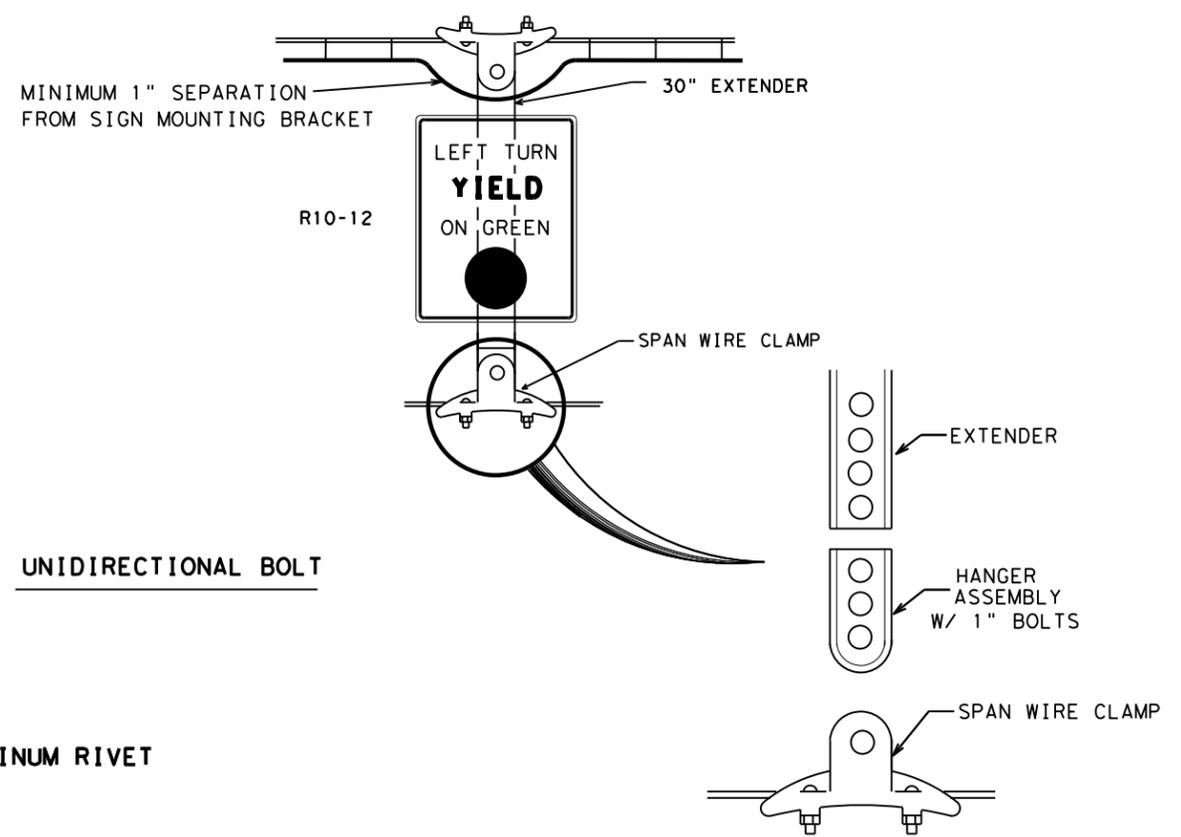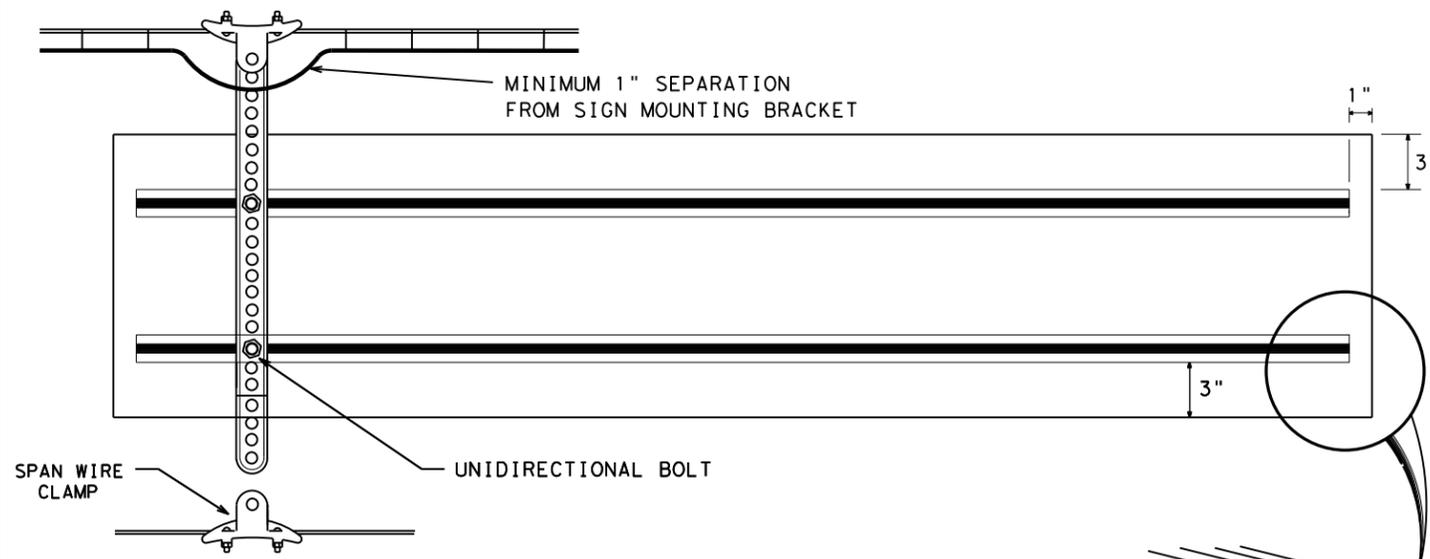




MEDIUM EXTRUSION HPN053

UNIDIRECTIONAL BOLT


ALUMINUM RIVET

HANGER ASSEMBLY DETAILS

- NOTES: 1. BASED ON SIGN WIDTH, THE NUMBER OF VERTICAL SUPPORTS REQUIRED ARE AS FOLLOWS:
 3'-0" OR LESS - 1 SUPPORT REQUIRED
 >3'-0" UP TO 8'-0" - 2 SUPPORTS REQUIRED
 >8'-0" - 3 SUPPORTS REQUIRED
 SEE DIAGRAMS FOR SIGN SUPPORT SPACING
2. FOR STREET NAME SIGNS, EXTRUDED ALUMINUM SHALL BE MOUNTED FOR HORIZONTAL SUPPORT AS SHOWN.

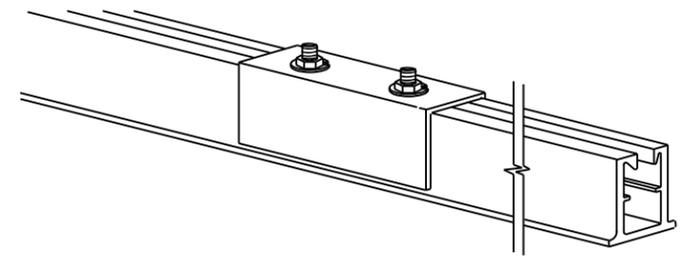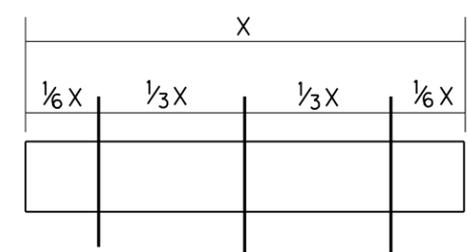

5" ALUMINUM COUPLING
6061-T6



ALUMINUM RIVET

NOTE: ALUMINUM RIVETS SHALL BE USED TO ATTACH THE SIGN TO THE EXTRUDED ALUMINUM. SPACINGS OF RIVETS SHALL BE 6" O.C.



SHEET 3 OF 3
DALLAS DISTRICT STANDARD

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
	6 (SEE TITLE SHEET)	293
STATE	STATE DIST. NO.	COUNTY
TEXAS	DAL	COLLIN
CONT.	SECT.	JOB HIGHWAY NO.
1392	01	044, ETC. FM 1378

CONSTRUCTION DETAILS FOR SPAN WIRE MOUNTED TRAFFIC SIGNALS

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

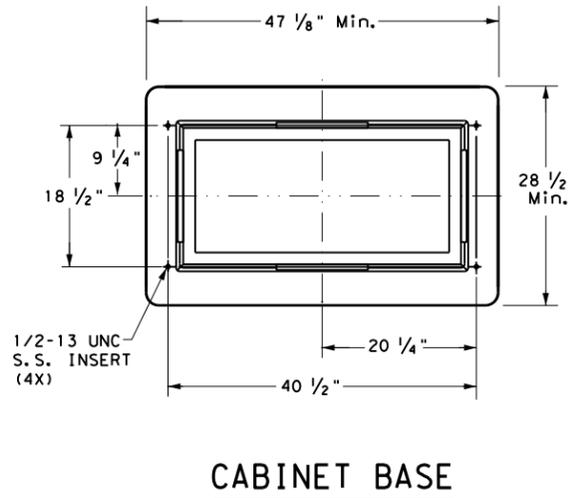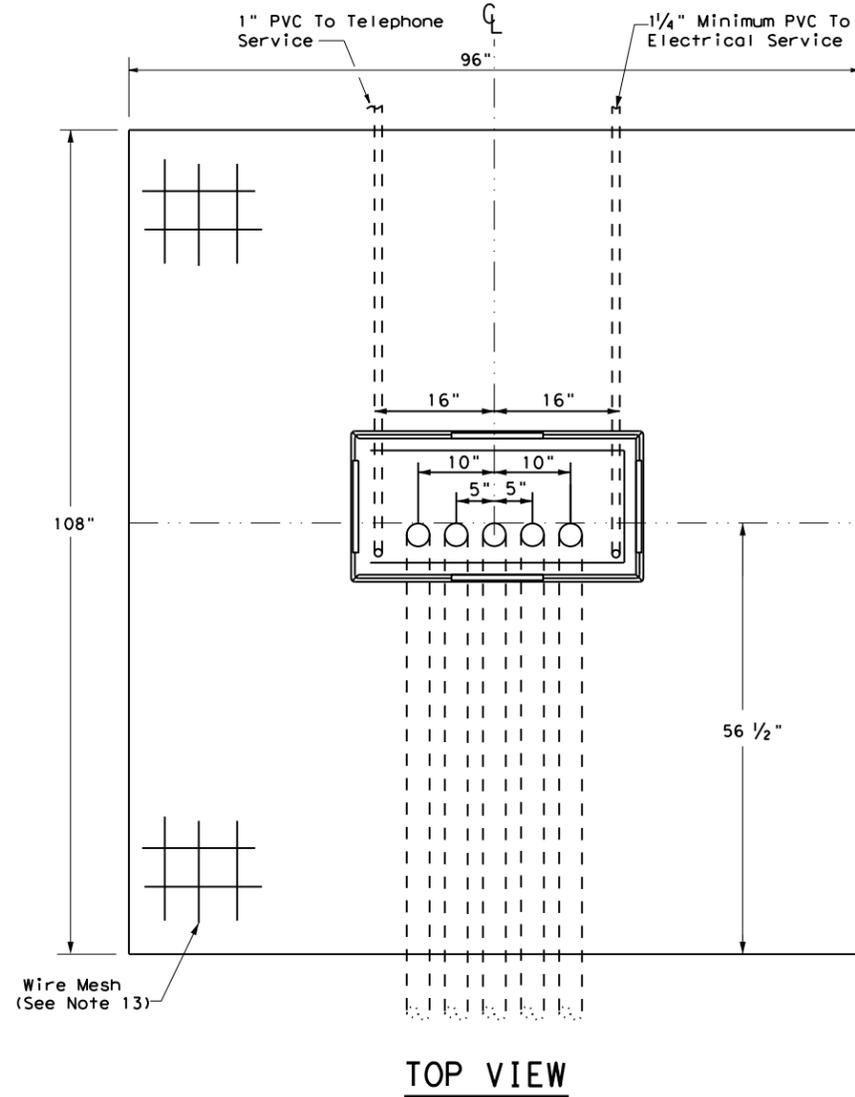

TRAFFIC SIGNAL CONTROLLER BASE:

1. Provide a traffic signal controller base (cabinet base) manufactured of polymer concrete material consisting of calcareous and siliceous stone; glass fibers and thermoset polyester resin. The polymer concrete cabinet base must be reinforced on the inside of the cabinet base with fiberglass matting. Provide one of the following bases: Armorcast Part # A6001848X24, Quazite Model # PG3048Z709, or other as approved by TxDOT Traffic Safety Division.
2. The polymer concrete material must have a minimum compressive strength of 10,300 pounds per square inch (psi), minimum flexural strength of 3600 psi, and minimum shear strength of 3600 psi.
3. The polymer concrete cabinet base must conform to the dimensions shown and must accommodate a standard TxDOT basemount cabinet.
4. Supply the cabinet base with four 1#2"-13 UNC stainless steel inserts for attachment of the cabinet to the base. Inserts must withstand a minimum torque of 50 ft-lb and a minimum straight pull out strength of 750 lbs.
5. Provide the cabinet base with 4 cable racks mounted one on each side of the base 2" to 7" from the top edge of the base. Unless approved otherwise, cable racks must be 1-1/2 x 9#16x 3#16inch steel channel with eight T-slots spaced at 1-1/2 inches. The cable racks must easily accommodate the insertion of tie wraps to attach field wiring to the racks to serve as strain relief. Secure cable racks to the base using 1#2"-13 UNC stainless steel screws and inserts.
6. The cabinet base, when secured to the concrete slab with controller cabinet attached, must withstand a minimum wind load of 125 mph or a 850 lb force applied at 49" above the bottom of the base without causing the base or cabinet to come out of their anchored position or cause any permanent deformation. The manufacturer must supply certification by an independent testing laboratory or sealed by a Texas Licensed Professional Engineer. Provide the cabinet base with hardware for attachment to a concrete slab.
7. The traffic signal base must be permanently marked either by impress or by permanent ink with the manufacturer's model number and name or logo.
8. Seal the base to the concrete with a silicone caulk bead and fastened to the slab per manufacturer's instructions.

CONCRETE SLAB:

9. Traffic signal controller pad must be a portland cement concrete slab poured in place, must conform to the dimensions shown, and must be level.
10. Grade earthwork such that it is flush with the concrete pad on all four sides, unless otherwise shown on the plans. Subsidiary to ITEM 680, four inch rip rap may be used in lieu of earthwork. Slopes shall gradually contour to match plans.
11. Bond a #8 AWG copper ground wire and an 8 ft ground rod bonded to the reinforcing mesh by a suitable UL Listed clamp and terminated to the cabinet grounding bus for the purpose of providing a local ground for the electrical grounding conductor. The electrical grounding conductor specified in Item 680-3.A.4 is required and must be terminated to the cabinet ground bus.
12. Install a PVC sleeve to prevent the ground rod from direct embedment in the slab.
13. Provide welded wire mesh 6X6-W2.9 X W2.9 for reinforcement. Provide joints and splices in the mesh with a minimum 6-inch overlap. Center the mesh between top and bottom and provide a minimum 3 inch cover on the edges.
14. Provide Class B concrete minimum for the slab in accordance with Item 421. Construct the slab in accordance with Item 531.

CONDUITS:


15. Stub up and run 3-inch conduits through the slab to the various traffic signal poles and ground boxes as shown on the layouts. Install the number of conduits as shown on layouts plus two additional 3 inch conduits for future use. Terminate the conduits with a bushing between 2 and 4-inches above the slab.
16. Extend conduits for future use at least 18-inches from the edge of the slab, terminate underground with a coupling, and cap and seal so that the seal can be removed without damaging the coupling. This must also apply to unused telephone conduit.
17. Stub up two separate conduits through the slab from the electrical and telephone services. Run the conduit for the electrical feed directly to the electrical service enclosure. Run the conduit for the telephone line directly to the telephone service, usually located on the same pole as the electrical service. Telephone must not under any circumstance share a conduit with any other function.
18. Terminate electric and telephone conduits above the slab with a coupling. After the base is installed, extend the conduits above the top of the base and secure to the base using a steel one-hole strap or similar suitable substitute.

CONTROLLER CABINET:

19. Anchor the controller cabinet to the base using four stainless steel 1/2-13 NC bolts.
20. The silicone caulk bead specified in Item 680.3.B must be RTV 133.

PAYMENT:


21. Bid TS-CF as subsidiary to Item 680.

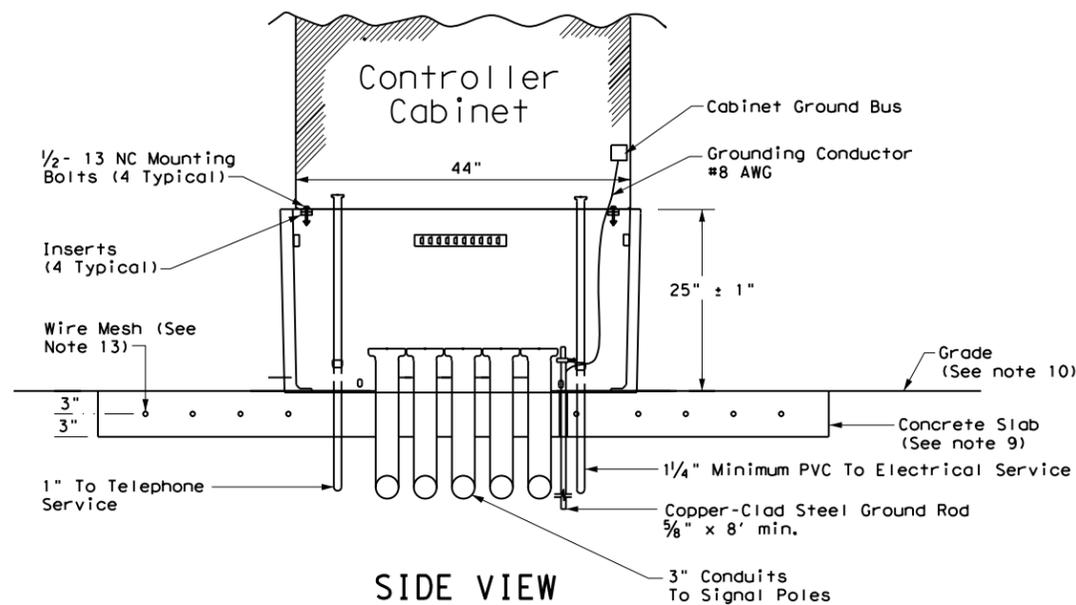

		Traffic Safety Division Standard	
TRAFFIC SIGNAL CONTROLLER CABINET BASE AND PAD TS-CF-21			
FILE: ts-cf-21.dgn	DN:	CK:	CK:
© TxDOT October 2000	CONT	SECT	JOB
12-04 REVISIONS	1392 01	044 .ETC	FM 1378
2-21	DIST	COUNTY	SHEET NO.
18	COLLIN		294


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

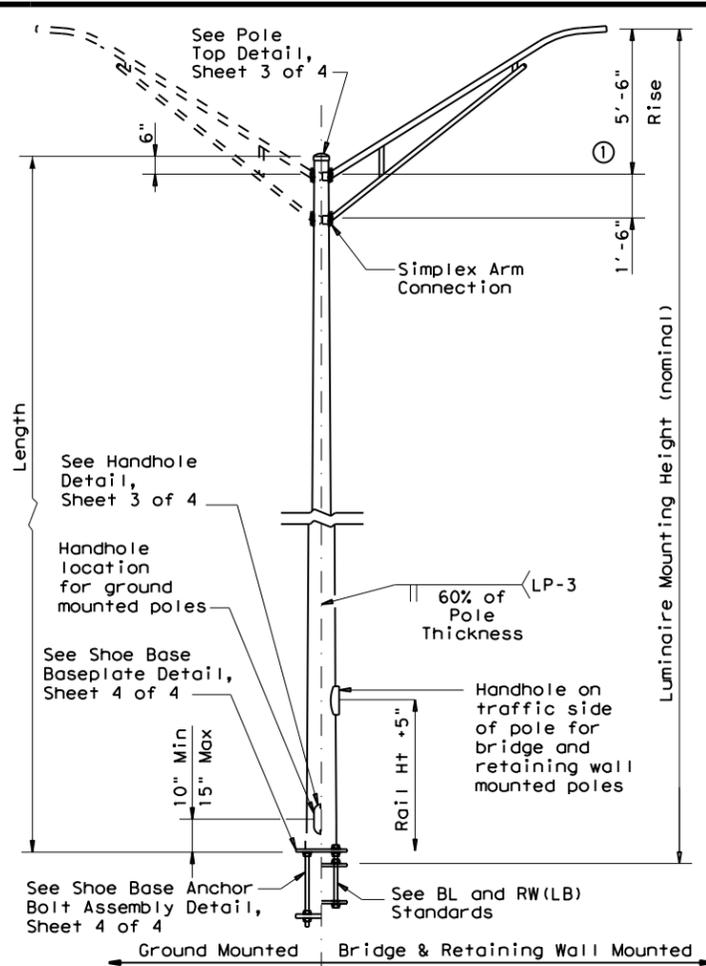


SHOE BASE POLE

SHOE BASE POLE					
Luminaire Mounting Height (Nominal) (ft)	Base Diameter (in)	Top Diameter (in)	Length (ft)	Pole Thickness (in)	Design Moment (K-ft)
20.00	7.00	4.90	15.00	0.1196	7.1
30.00	7.50	4.00	25.00	0.1196	13.2
31.00-39.00	8.00	4.36-3.24	26.00-34.00	0.1196	20.7
40.00	8.50	3.60	35.00	0.1196	20.7
50.00	10.50	4.20	45.00	0.1196	30.3

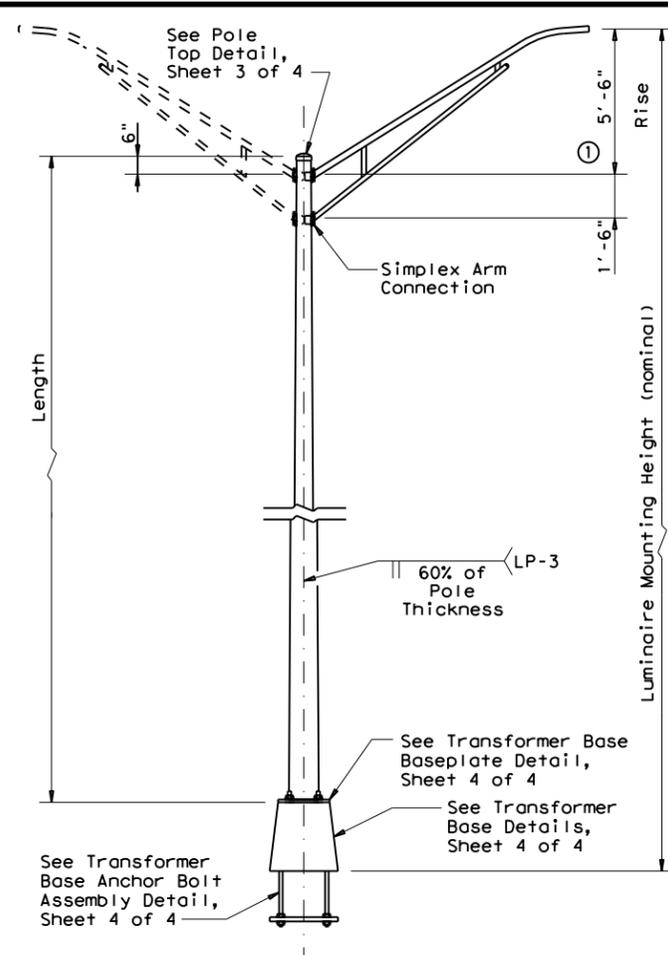

TRANSFORMER BASE POLE

TRANSFORMER BASE POLE					
Luminaire Mounting Height (Nominal) (ft)	Base Diameter (in)	Top Diameter (in)	Length (ft)	Pole Thickness (in)	Design Moment (K-ft)
20.00	7.00	5.11	13.50	0.1196	7.1
30.00	7.50	4.21	23.50	0.1196	13.2
31.00-39.00	8.00	4.57-3.45	24.50-32.50	0.1196	20.7
40.00	8.50	3.81	33.50	0.1196	20.7
50.00	10.00	3.91	43.50	0.1196	30.3

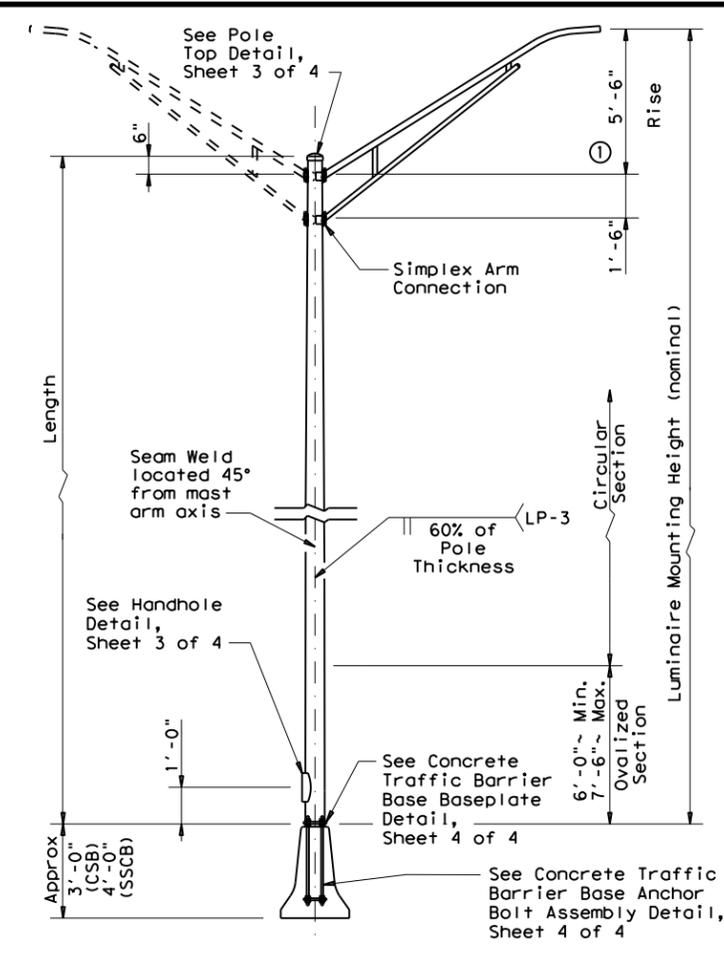

CONCRETE TRAFFIC BARRIER BASE POLE

CONCRETE TRAFFIC BARRIER BASE POLE (CSB/SSCB)						
Luminaire Mounting Height (Nominal) (ft)	Base Diameter (in)	Top Diameter (in)	Length (ft)	Pole Thickness (in)	Design Moment (K-ft)	
					About C of Rail	Perp. to Rail
28.00	9.00	5.78	23.00	0.1196	10.3	13.2
38.00	9.00	4.38	33.00	0.1196	16.6	20.8
48.00	10.50	4.48	43.00	0.1345	25.1	30.5

GENERAL NOTES:

- Designs conform to AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals, 6th Edition (2013) and Interim Revisions thereto. Design 3-Second Gust Wind Speed equals 110 mph with a 1.14 gust factor. A wind importance factor of 0.80 is applied to adjust the wind speed to a 25 year recurrence interval. Design moments listed in tables assume base of pole is 25' above natural ground level.
- Structures are designed to support two 12' luminaire mast arms and luminaires. Mast arms are designed to support a 60-pound luminaire having an effective projected area of 1.6 square feet.
- Fabrication shall be in accordance with the Specifications and with the details, dimensions, and weld procedures shown herein. Do not submit shop drawings for roadway illumination pole assemblies fabricated in accordance with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. Materials, fabrication tolerances, and shipping practices shall meet the requirements of these sheets and the Specifications. In the absence of specified fabrication tolerances, dimensions shall be within the tolerances generally obtainable in normal fabrication practice.
- For mounting heights between values shown in the tables, use base diameter and thickness values for the larger height.
- Unless otherwise noted, all steel parts shall be galvanized in accordance with Item 445, "Galvanizing."
- Steel poles shall be fabricated in accordance with Item 441, "Steel Structures." Longitudinal seam welds for pole sections shall have 60% minimum penetration. All welding shall be in accordance with AWS D1.1, Structural Welding Code-Steel.
- Two-section poles joined by circumferential welds will not be permitted, unless otherwise shown on the plans. Poles may be fabricated in two sections and field-assembled by the lap-joint method. The two sections shall telescope together with a lap length of not less than 1-1/2 times the shaft diameter at the lap joint.
- Alternate material equal to or better than material specified may be substituted with the approval of the Engineer.
- Lubricate and tighten anchor bolts, when erecting shoe base poles and concrete traffic barrier base poles, in accordance with Item 449, "Anchor Bolts."
- All poles, except Transformer Base Poles, shall have hand holes with reinforcing frames and covers. For ground mounted shoe base poles, hand holes shall be placed 90 degrees to mast arm unless otherwise noted on the plans. For poles mounted on a concrete traffic barrier with one luminaire arm, hand holes shall be located 180 degrees from luminaire arm. For poles mounted on a concrete traffic barrier with two luminaire arms, all hand holes shall be on the same side of the barrier. For poles mounted on a bridge lighting bracket or a retaining wall lighting bracket, hand hole shall be on traffic side of the pole, at a height that will clear the barrier.
- The finished pole shall have a smooth, uniform finish free of pits, blisters, or other defects. Scratched, chipped, and other damaged galvanized areas on poles and mast arms shall be repaired in accordance with Item 445, "Galvanizing."
- Pole length is based on a 5'-6" luminaire arm rise. 4 ft. luminaire arms have a 2'-6" rise. A pole with 4 ft. luminaire arms will have an actual mounting height 3'-0" less than the nominal mounting height. Increasing the pole length to meet the nominal mounting height is allowed, but unnecessary unless otherwise directed by the engineer.
- Erect transformer base poles in accordance with sheet RID(1).

MATERIAL DATA

COMPONENT	ASTM DESIGNATION	MIN. YIELD (ksi)
Pole Shaft (0.14"/ft. Taper)	A572 Gr 50, A595 Gr A, A1011 HSLAS Gr 50 Cl 2 ③, or A1008 HSLAS Gr 50 Cl 2	50
Base Plate and Handhole Frame	A572 Gr.50, or A36	36
T-Base Connecting Bolts	F3125 Gr A325	92
Anchor Bolts	F1554 Gr 55, A193-B7 or A321	55 105
Anchor Bolt Templates	A36	36
Heavy Hex (H.H.) Nuts	A194 Gr 2H, or A563 Gr DH	
Flat Washers	F436	

NOTES:

- 2'-6" rise for 4 ft. luminaire arms.
- Before ovalized as shown on Concrete Traffic Barrier Base Baseplate details, Sheet 4 of 4.
- A1011 SS Gr 50 may be used instead of HSLAS, provided the material meets the elongation requirements for HSLAS.

POLE ASSEMBLY FABRICATION TOLERANCES TABLE

DIMENSION	TOLERANCE
Shaft length	+1"
I.D. of outside piece of slip fitting pieces	+1/8", -1/16"
O.D. of inside piece of slip fitting pieces	+1/32", -1/8"
Shaft diameter: other	+3/16"
Out of "round"	1/4"
Straightness of shaft	±1/4" in 10 ft
Twist in multi-sided shaft	4° in 50 ft
Perpendicular to baseplate	1/8" in 24"
Pole centered on baseplate	±1/4"
Location of Attachments	±1/4"
Bolt hole spacing	±1/16"


SHEET 2 OF 4



**ROADWAY ILLUMINATION POLES
RIP(2)-19**

FILE: rip-19.dgn	DN:	CK:	DW:	CK:
© TxDOT January 2007	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044 .etc	FM 1378
7-17	DIST	COUNTY	SHEET NO.	
12-19	DAL	COLLIN	296	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

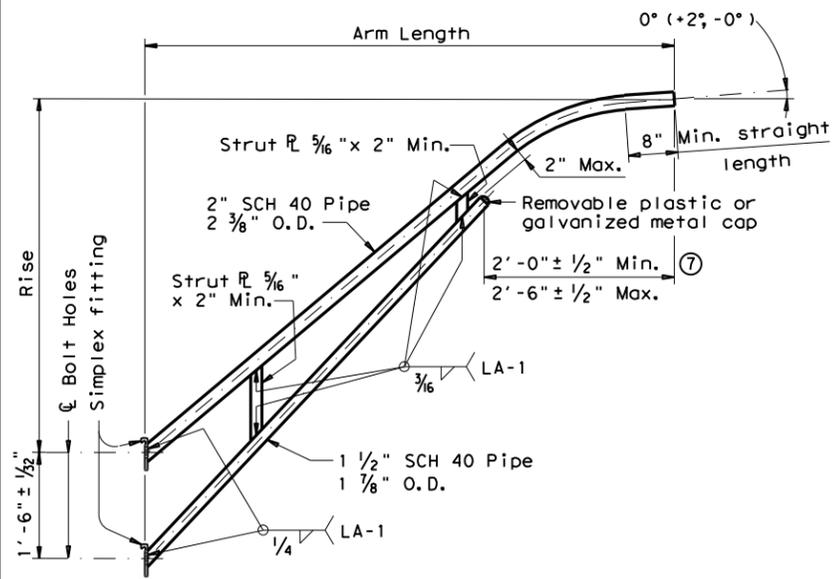


LUMINAIRE ARM

LUMINAIRE ARM DIMENSIONS		
Nominal Arm Length	Arm Length	Rise
4'-0"	3'-6"	2'-6"
6'-0"	5'-6"	5'-6"
8'-0"	7'-6"	5'-6"
10'-0"	9'-6"	5'-6"
12'-0"	11'-6"	5'-6"


ARM ASSEMBLY FABRICATION TOLERANCES TABLE	
DIMENSION	TOLERANCE
Arm Length	±1"
Arm Rise	±1"
Deviation from flat	1/8" in 12"
Spacing between holes	±1/32"

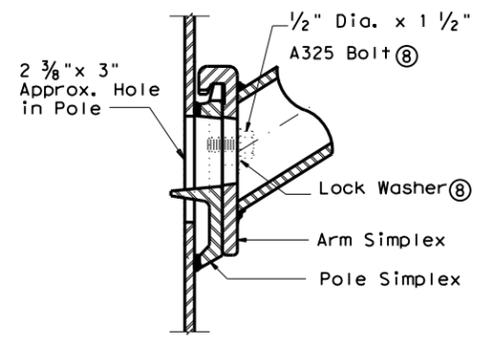


UPPER SIMPLEX FITTING
(Gusset not shown for clarity)

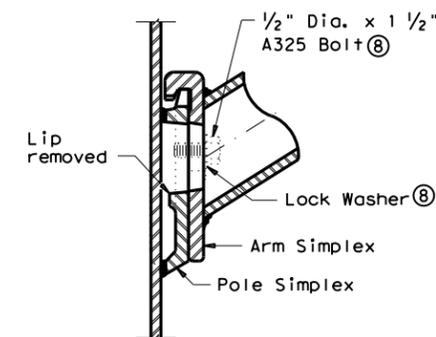




LOWER SIMPLEX FITTING
(Gusset not shown for clarity)
SECTION B-B

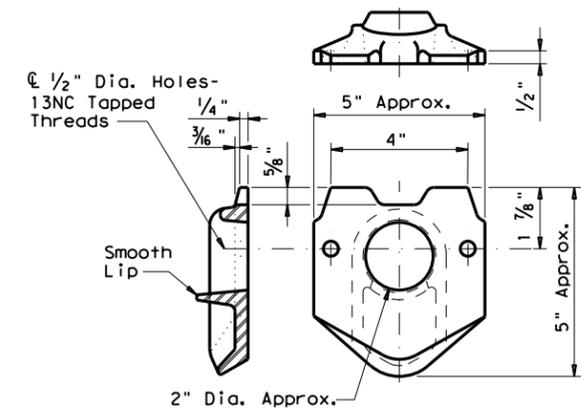


POLE SIMPLEX DETAIL

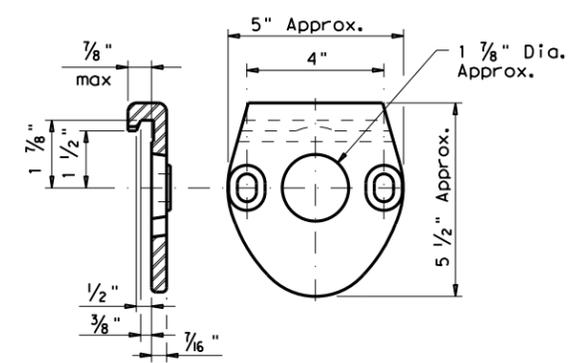


ARM SIMPLEX DETAIL

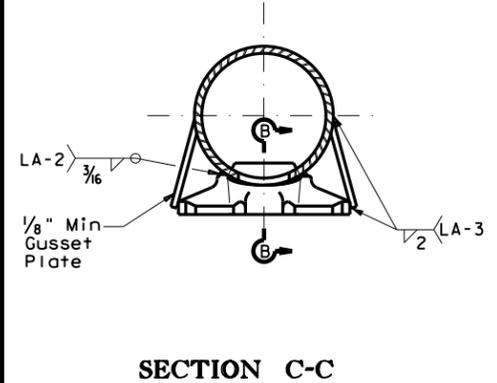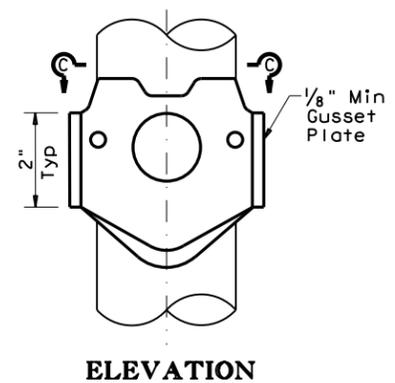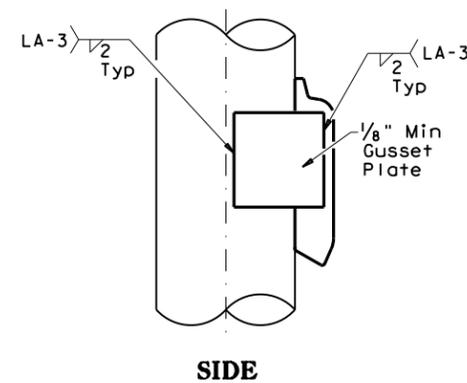


SIMPLEX ATTACHMENT DETAIL

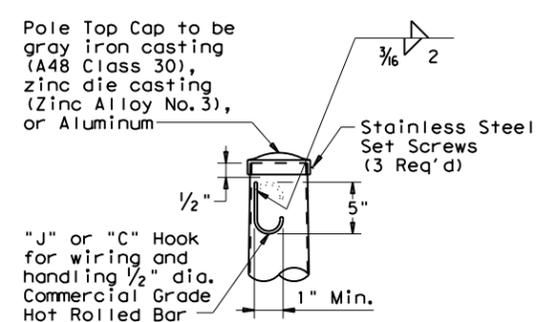

POLE TOP

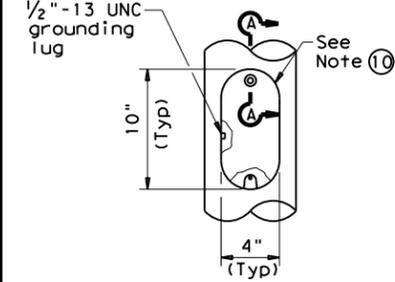

ELEVATION

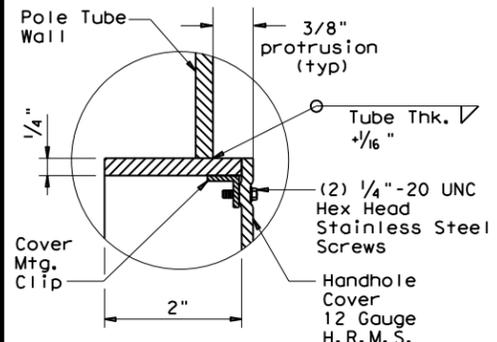

SECTION A-A

HANDHOLE

NOTES:

- ④ Any of the materials listed for plates may be used where the drawings do not specify a particular ASTM designation.
- ⑤ A576 must be suitable for forging and also meet minimum tensile strength of 65 ksi, minimum yield of 35 ksi, and elongation in 2 inches of 22 percent.
- ⑥ A572, A1008 HSLAS-F, and A1011 HSLAS-F materials may have higher yield strengths but shall not have less elongation than the grade indicated.
- ⑦ Dimensional limits are given to show acceptable variation in design. All of a Fabricator's production of a particular arm length shall have the same dimensions within specified tolerances.
- ⑧ Each pole simplex fitting shall be supplied with 2 bolts and 2 lock washers of the size specified. The bolts and lock washers shall be secured to the pole with the other hardware items called for in the plans.
- ⑨ Proposed deviations in arm simplex dimensions or materials must be submitted to the Department for approval.
- ⑩ A welded handhole frame is permissible. Maximum of two (2) CJP weld splices is allowed.


MATERIALS

Pole or Arm Simplex	ASTM A27 Gr 65-35 or Gr 70-36, A148 Gr 80-50, A576 Gr 1021 ⑤, or A36 (Arm only)
Arm Pipes	ASTM A53 Gr A or B, A500 Gr B, A501, A 1008 HSLAS-F Gr 50 ⑥, or A1011 HSLAS-F Gr 50 ⑥
Arm Struts and Gusset Plates ④	ASTM A36, A572 Gr 50 ⑥, or A588
Misc.	ASTM designations as noted

ROADWAY ILLUMINATION POLES
RIP(3) - 19


FILE: rip-19.dgn	DN:	CK:	DW:	CK:
©TxDOT January 2007	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044 ,etc	FM 1378
7-17	DIST	COUNTY	SHEET NO.	
12-19	DAL	COLLIN	297	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

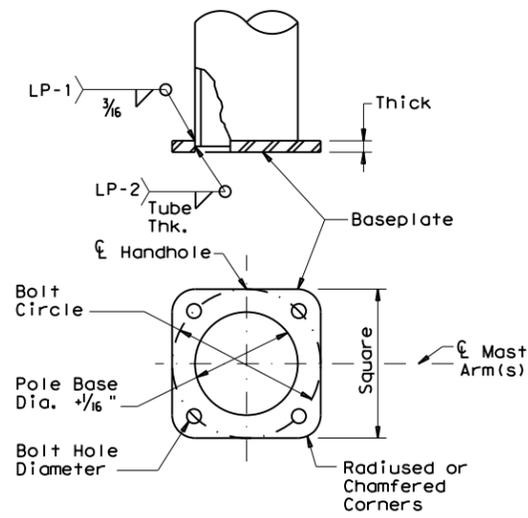


SHOE BASE BASEPLATE

SHOE BASE BASEPLATE TABLE				
MOUNTING HEIGHTS (nominal)	BOLT CIRCLE	SQUARE	THICK	BOLT HOLE DIAMETER
20' - 39'	13"	13"	1 1/4"	1 1/4"
40'	15"	15"	1 1/4"	1 1/2"
50'	15"	15"	1 1/2"	1 1/2"

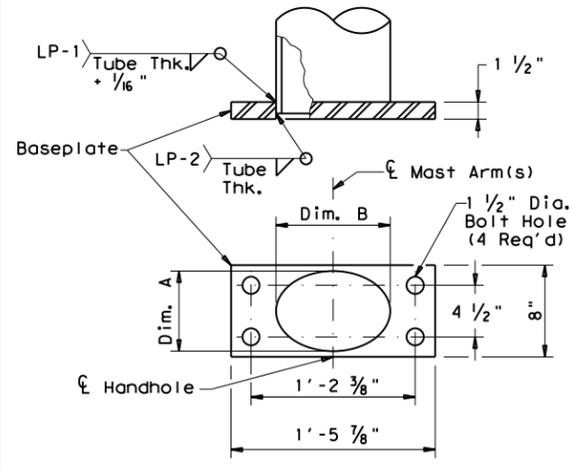

CONCRETE TRAFFIC BARRIER BASE BASEPLATE


CONCRETE TRAFFIC BARRIER BASE BASEPLATE TABLE			
MOUNTING HEIGHTS (nominal)	POLE DIA. (12)	DIM. A	DIM. B
28' - 38'	9"	7" ± 1/4"	10" ± 1/4"
48'	10 1/2"	7" ± 1/4"	13" ± 1/4"

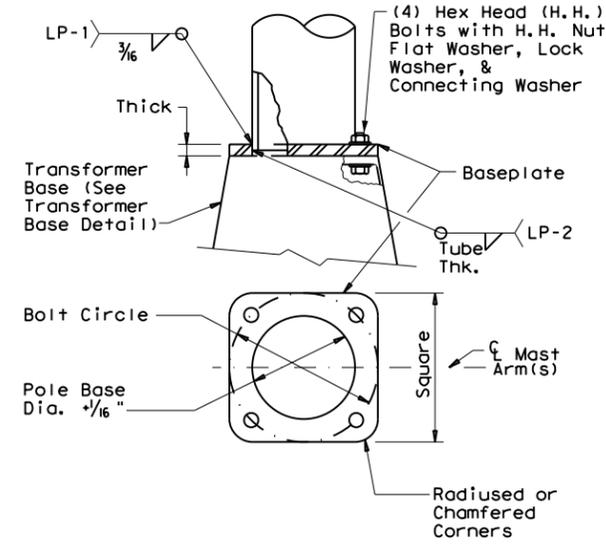


TRANSFORMER BASE BASEPLATE

TRANSFORMER BASE BASEPLATE TABLE						
MOUNTING HEIGHTS (nominal)	BOLT CIRCLE	SQUARE	THICK	CONNECTING BOLT DIA.	BOLT HOLE DIAMETER	TRANSFORMER BASE TYPE
20' - 39'	13"	13"	1 1/4"	1"	1 1/4"	A
40'	15"	15"	1 1/4"	1 1/4"	1 1/2"	B
50'	15"	15"	1 1/2"	1 1/4"	1 1/2"	B


TRANSFORMER BASE TABLE		
TYPE	TOP B.C.	BTM. B.C.
A	13"	14"
B	15"	17 1/4"



DETAIL A




DETAIL B

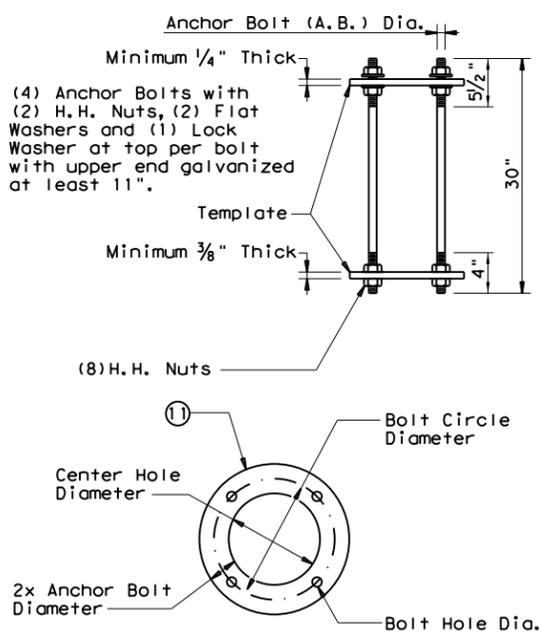


SHOE BASE ANCHOR BOLT ASSEMBLY

SHOE BASE ANCHOR BOLT ASSEMBLY TABLE				
MOUNTING HEIGHTS (nominal)	A.B. Dia.	BOLT CIRCLE DIAMETER	CTR. HOLE DIAMETER	BOLT HOLE DIAMETER
20' - 39'	1"	13"	11"	1 1/16"
40' - 50'	1 1/4"	15"	12 1/2"	1 5/16"

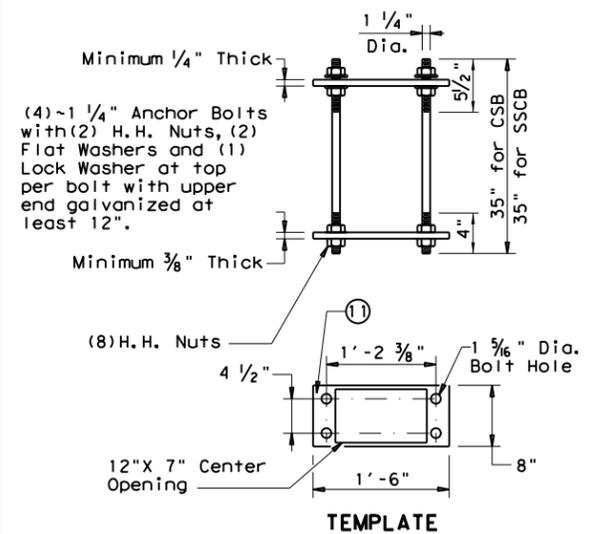


CONCRETE TRAFFIC BARRIER BASE ANCHOR BOLT ASSEMBLY


CONCRETE TRAFFIC BARRIER BASE ANCHOR BOLT ASSEMBLY TABLE				
MOUNTING HEIGHTS (nominal)	A.B. Dia.	BOLT CIRCLE DIAMETER	CTR. HOLE DIAMETER	BOLT HOLE DIAMETER
20' - 39'	1"	14"	12"	1 1/16"
40' - 50'	1 1/4"	17 1/4"	14 3/4"	1 5/16"

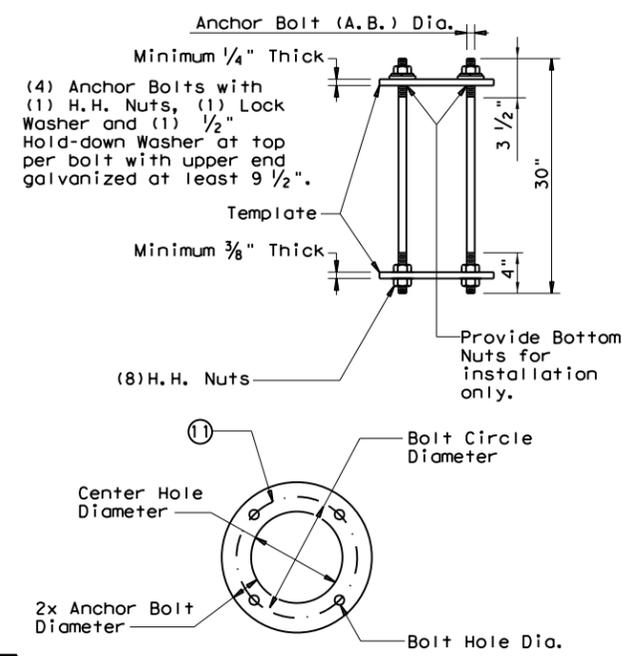


TRANSFORMER BASE ANCHOR BOLT ASSEMBLY



TOP PLAN



BOTTOM PLAN

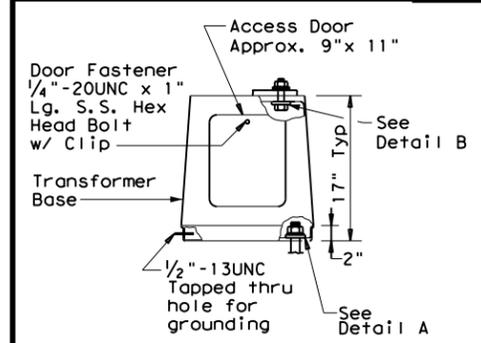

ELEVATION

TRANSFORMER BASE DETAILS

GENERAL NOTES:

- For mounting heights between those shown in the table, use the values in the table for the larger mounting height.
- All breakaway bases shall meet the breakaway requirements of the AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals, 6th Edition (2013) and Interim Revisions thereto, and shall have been tested by FHWA-approved methods. All bases shall have been structurally tested to resist 150% of the design moment.
- Transformer bases shall be cast from aluminum, ASTM B108 or B26 Alloy 356.0-T6, or other material approved by the Engineer. Four Hex Head (H.H.) bolts with four H.H. nuts, four lock washers, four flat washers, and connecting and hold-down washers as recommended by the manufacturer, galvanized to ASTM A153 Class C or D, or B695 Class 50, shall be provided with each transformer base for connecting the pole. Bolts shall be ASTM A325 or approved equal. Nuts shall be ASTM A563 grade DH galvanized.
- Bases shall be stamped, incised or by other approved permanent means, marked to show fabricator's name or logo, and model number. Such information shall be placed in a readily seen location, inside or outside the base, but shall not be placed on the door.
- Doors for transformer bases shall be made of plastic, fiberglass or other non-metallic material approved by the Engineer and shall be attached with stainless steel screws or bolts. Transformer bases shall be cleaned by grit blast cleaning after heat treatment. Certification by the manufacturer of heat treatment shall be furnished with transformer bases. The certification shall show the metal alloy and temper and that the base meets those requirements, chemical and physical. The certification shall also show the material ASTM specification. Transformer bases shall be cast with a removable tab bar for material testing. Some bars may have been removed by the manufacturer for testing.

NOTES:

- Anchor Bolt Templates do not need to be galvanized.
- Pole diameter before ovalized.

ANCHOR BOLT FABRICATION TOLERANCES TABLE	
DIMENSION	TOLERANCE
Length	± 1/2"
Threaded length	± 1/2"
Galvanized length (if required)	- 1/4"



**ROADWAY ILLUMINATION POLES
RIP(4)-19**

FILE: rip-19.dgn	DN:	CK:	DW:	CK:
©TxDOT January 2007	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044 .etc	FM 1378
7-17	DIST	COUNTY	SHEET NO.	
12-19	DAL	COLLIN	298	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

Arm Length ft.	ROUND POLES					POLYGONAL POLES					Foundation Type
	D _B in.	D ₁₉ in.	D ₂₄ in.	D ₃₀ in.	① thk in.	D _B in.	D ₁₉ in.	D ₂₄ in.	D ₃₀ in.	① thk in.	
20	10.5	7.8	7.1	6.3	.179	11.5	8.5	7.7	6.8	.179	30-A
24	11.0	8.3	7.6	6.8	.179	12.0	9.0	8.2	7.3	.179	30-A
28	11.5	8.8	8.1	7.3	.179	12.5	9.5	8.7	7.8	.179	30-A
32	12.5	9.8	9.1	8.3	.179	12.0	9.0	8.2	7.3	.239	30-A
36	12.0	9.3	8.6	7.8	.239	12.5	9.5	8.7	7.8	.239	36-A
40	12.0	9.3	8.6	7.8	.239	13.5	10.5	9.7	8.8	.239	36-A
44	12.5	9.8	9.1	8.3	.239	14.0	11.0	10.2	9.3	.239	36-A
48	13.0	10.3	9.6	8.8	.239	15.0	12.0	11.2	10.3	.239	36-A


Arm Length ft.	ROUND ARMS					POLYGONAL ARMS				
	L ₁ ft.	D ₁ in.	D ₂ in.	① thk in.	Rise	L ₁ ft.	D ₁ in.	② D ₂ in.	① thk in.	Rise
20	19.1	6.5	3.8	.179	1'-9"	19.1	7.0	3.5	.179	1'-8"
24	23.1	7.5	4.3	.179	1'-10"	23.1	7.5	3.5	.179	1'-9"
28	27.1	8.0	4.2	.179	1'-11"	27.1	8.0	3.5	.179	1'-10"
32	31.0	9.0	4.7	.179	2'-1"	31.0	9.0	3.5	.179	2'-0"
36	35.0	9.5	4.6	.179	2'-4"	35.0	10.0	3.5	.179	2'-1"
40	39.0	9.5	4.1	.239	2'-8"	39.0	9.5	3.5	.239	2'-3"
44	43.0	10.0	4.1	.239	2'-11"	43.0	10.0	3.5	.239	2'-6"
48	47.0	10.5	4.1	.239	3'-4"	47.0	11.0	3.5	.239	2'-9"

D_B = Pole Base O.D.
D₁₉ = Pole Top O.D. with no Luminaire and no ILSN
D₂₄ = Pole Top O.D. with ILSN w/out Luminaire
D₃₀ = Pole Top O.D. with Luminaire
D₁ = Arm Base O.D.
D₂ = Arm End O.D.
L₁ = Shaft Length
L = Nominal Arm Length

- ① Thickness shown are minimums, thicker materials may be used.
- ② D₂ may be increased by up to 1" for polygonal arms.

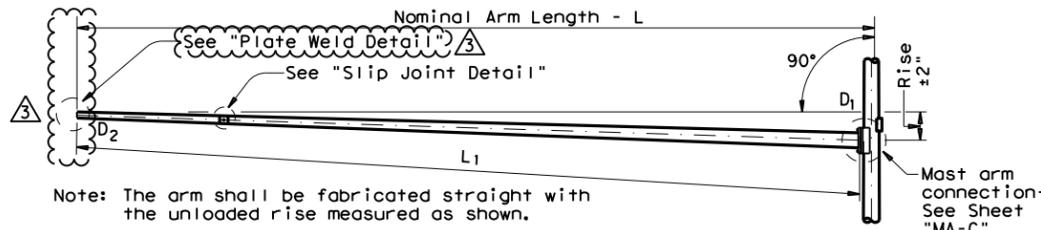

TRAFFIC SIGNAL ARM
(Fixed Mount)

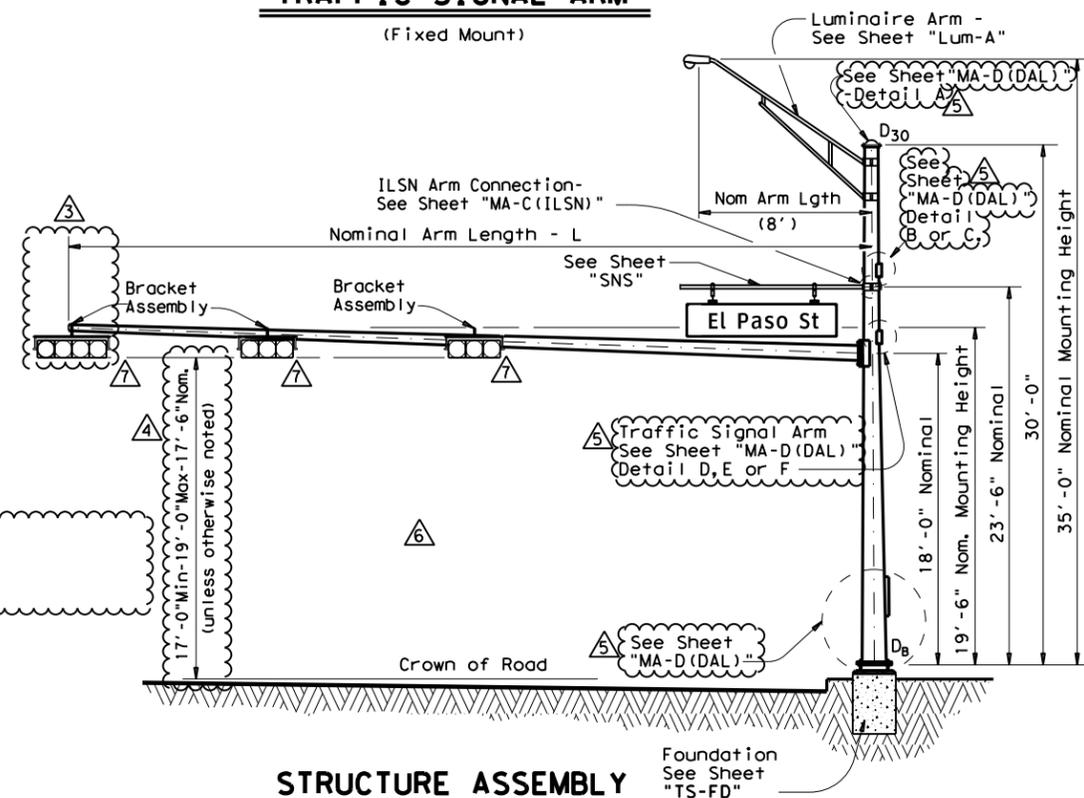

STRUCTURE ASSEMBLY

SHIPPING PARTS LIST

Ship each pole with the following attached: enlarged hand hole, pole cap, fixed-arm connection bolts and washers and any additional hardware listed in the table.

Nominal Arm Length	30' Poles With Luminaire		24' Poles With ILSN		19' Poles With No Luminaire and No ILSN	
	Designation	Quantity	Designation	Quantity	Designation	Quantity
20	20L-80		20S-80		20-80	
24	24L-80		24S-80		24-80	
28	28L-80	1	28S-80		28-80	
32	32L-80		32S-80		32-80	
36	36L-80		36S-80		36-80	
40	40L-80	1	40S-80		40-80	
44	44L-80		44S-80		44-80	
48	48L-80		48S-80		48-80	

Traffic Signal Arms (1 per Pole) Ship each arm with the listed equipment attached

Nominal Arm Length	Type I Arm (1 Signal)		Type II Arm (2 Signals)		Type III Arm (3 Signals)	
	Designation	Quantity	Designation	Quantity	Designation	Quantity
20	20I-80					
24	24I-80		24II-80			
28	28I-80		28II-80	1		
32			32II-80		32III-80	
36			36II-80		36III-80	
40			40II-80		40III-80	1
44			44II-80		44III-80	
48					48III-80	

Luminaire Arms (1 per 30' pole)

Nominal Arm Length	Quantity
8' Arm	2

ILSN Arm (Max. 2 per pole) Ship with clamps, bolts and washers

Nominal Arm Length	Quantity
7' Arm	
9' Arm	

Anchor Bolt Assemblies (1 per pole)

Anchor Bolt Diameter	Anchor Bolt Length	Quantity
1 1/2"	3'-4"	1
1 3/4"	3'-10"	1

Each anchor bolt assembly consists of the following: Top and Bottom templates, 4 anchor bolts, 8 nuts, 8 flat washers, and 4 nut anchor devices (Type 2) per Standard Drawing "TS-FD".

Templates may be removed for shipment.

MODIFICATIONS:


- △ REPLACED CGB CONNECTOR WITH BRACKET ASSEMBLY. (2/12)
- △ ADDITIONAL OPTION. (3/12)
- △ REPLACED TENON DETAIL WITH PLATE WELD DETAIL. (2/12)
- △ REVISED MINIMUM SIGNAL HEIGHT. (3/12)
- △ REPLACED "MA-D" WITH "MA-D(DAL)". (2/12)
- △ REMOVED TABLE OF DIMENSIONS "A". (2/12)
- △ REMOVED CGB CONNECTORS. (2/12)

Texas Department of Transportation

**TRAFFIC SIGNAL
SUPPORT STRUCTURES
SINGLE MAST ARM ASSEMBLY
(80 MPH WIND ZONE)
SMA-80(1)-12(DAL)**

© TxDOT August 1995		DN: MS	CK: JSY	DW: MMF	CK: JSY
REVISIONS		CONT	SECT	JOB	HIGHWAY
5-96	11-99	1392	01	044 .etc	FM 1378
1-12		DIST	COUNTY		SHEET NO.
		DAL	COLLIN		299

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

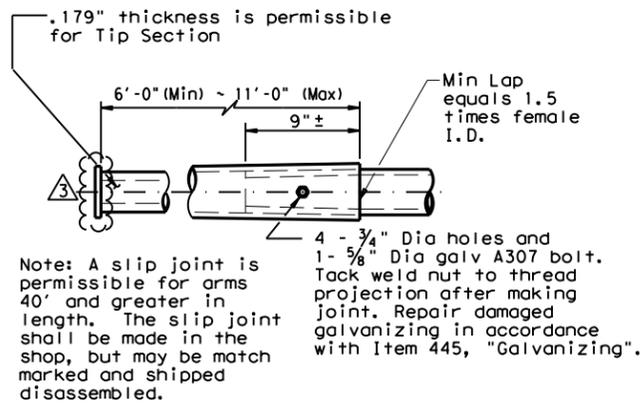

SLIP JOINT DETAIL

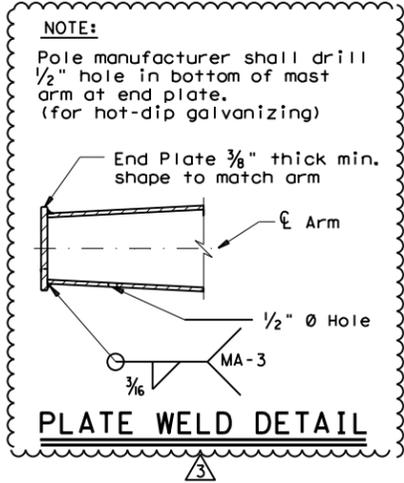


PLATE WELD DETAIL

Stainless steel bands (or Cables) and cast bracket as in "Astro-Brac", "Sky Bracket" or "Easy Bracket" with 1 1/2" Dia Threaded Coupling.

BRACKET ASSEMBLY

VIBRATION WARNING

Mast Arms of SMA and DMA structures and clamp-on Arms of LMA structures of approximately 40 ft or longer are subject to harmonic vertical vibrations in light wind conditions due to the aeroelastic characteristics of a few of the myriads of possible combinations of the following: signal numbers, weights and positions; existence/solidity of backplates; presence of additional attachments to the arm, such as signs and cameras; arm-wind orientation; and arm-pole stiffness.

Such vibrations may cause fatigue damage to the structure and may lead to galloping in moderate wind conditions which may further damage the structure and alarm the public. Tests have indicated that when wind is blowing toward the back side of signal heads having un-vented backplates attached the probability of unacceptable harmonic vibration and/or galloping is rather high.

If backplates are not required for improved visibility they should not be applied to the signal heads or, if they must be applied, they should be vented as a first and inexpensive measure to mitigate vibrations.

The traffic signal mast arms shall be visually inspected in 5 to 20 mph wind conditions after installation of signal heads and any attachments, including any required backplates. If vertical movements with a total excursion (maximum upward excursion to maximum downward excursion) of more than approximately 8" are observed at the arm tip, a damping plate shall be fitted to the arm. See "Damping Plate Mounting Details" on standard sheet, MA-DP-10.

This visual inspection shall be repeated after each modification of the structure that could affect its aeroelastic response. Excessive vibrations shall not be allowed to continue for more than two days.

GENERAL NOTES:

Design conforms to 1994 AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals and Interim Specifications thereto. Design Wind Speed equals 80 mph plus a 1.3 gust factor.


Poles are designed to support one 8'-0" luminaire arm, one 9'-0" internally lighted street name sign and one traffic signal arm with a length as tabulated. The specified luminaire load applied at the end of the luminaire arm equals 60 lbs vertical dead load plus the horizontal wind load on an effective projected area of 1.6 sq ft. The specified internally lighted street name sign load applied 4.5 ft from the centerline of the pole equals 85 lbs vertical dead load plus horizontal wind load on an effective projected area of 11.5 sq ft. The specified signal load applied at the end of the traffic signal arm equals 180 lbs vertical dead load plus the horizontal wind load on an effective projected area of 32.4 sq ft (actual area times drag coefficient).

See Standard Sheet "MA-D(DAL)" for pole details, "MA-C" for traffic signal arm connection details, "MA-C (ILSN)" for internally lighted street name sign arm connection details, "LUM-A" for luminaire arm and connection details, "SNS" for internally lighted street name sign details, and "TS-FD" for anchor bolt and foundation details. See "MA-C" for material specifications.

Fabrication shall be in accordance with Item 686, "Traffic Signal Pole Assemblies (Steel)" and with the details, dimensions, and weld procedures shown herein. Weld references call for preapproved weld procedures which the Fabricator must obtain prior to fabrication. Materials, fabrication tolerances, and shipping practices shall meet the requirements of this sheet and Item 686, "Traffic Signal Pole Assemblies (Steel)".


Unless otherwise noted, all parts shall be galvanized in accordance with Item 445, "Galvanizing", after fabrication.

Deviation from the details and dimensions shown herein require submission of shop drawings in accordance with Item 441, "Steel Structures". Alternate designs are not acceptable.

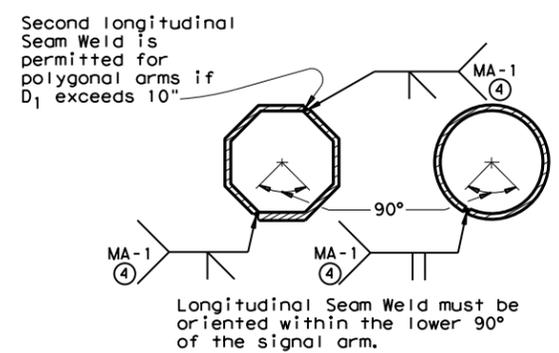

ARM WELD DETAIL

④ 60% Min. penetration
100% penetration within
6" of circumferential
base welds.

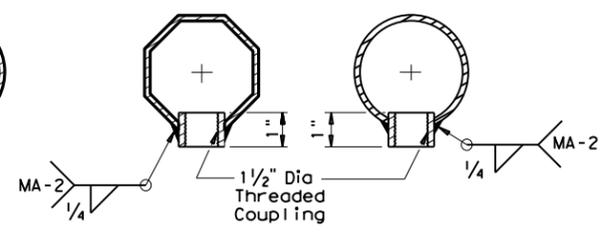

ARM COUPLING DETAILS


REPLACED TENON DETAIL WITH PLATE WELD DETAIL (2/12).
REPLACED "MA-D" WITH "MA-D(DAL)" (2/12).

TRAFFIC SIGNAL SUPPORT STRUCTURES
SINGLE MAST ARM ASSEMBLY
(80 MPH WIND ZONE)
SMA-80(2)-12(DAL)


© TxDOT August 1995		DN: MS	CK: JSY	DW: MMF	CK: JSY
REVISIONS		CONT	SECT	JOB	HIGHWAY
5-96	1392	01	044	.etc	FM 1378
1-12	DIST	COUNTY		SHEET NO.	
	DAL	COLLIN		300	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:
FILE:

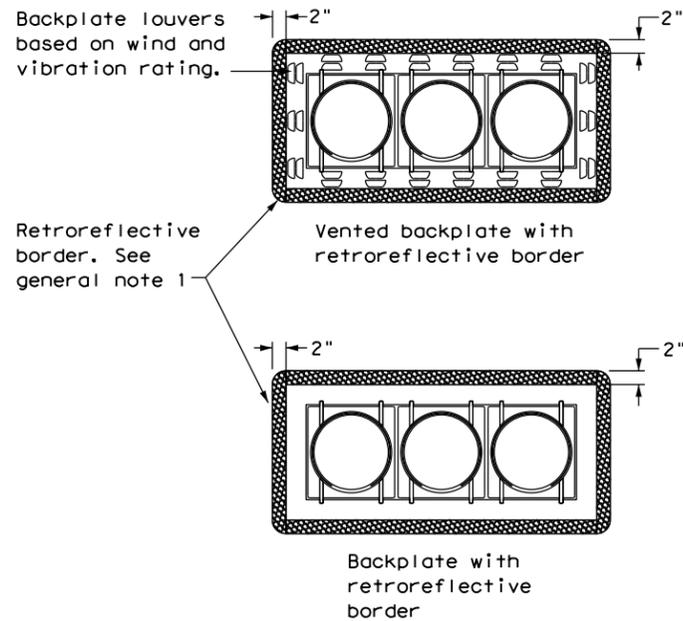


THREE-SECTION HEAD
HORIZONTAL OR VERTICAL

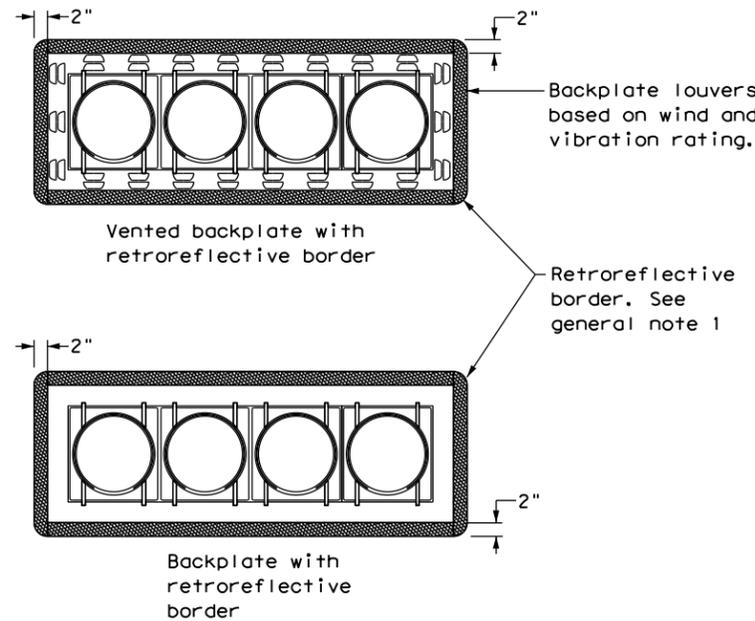



FOUR-SECTION HEAD
HORIZONTAL OR VERTICAL

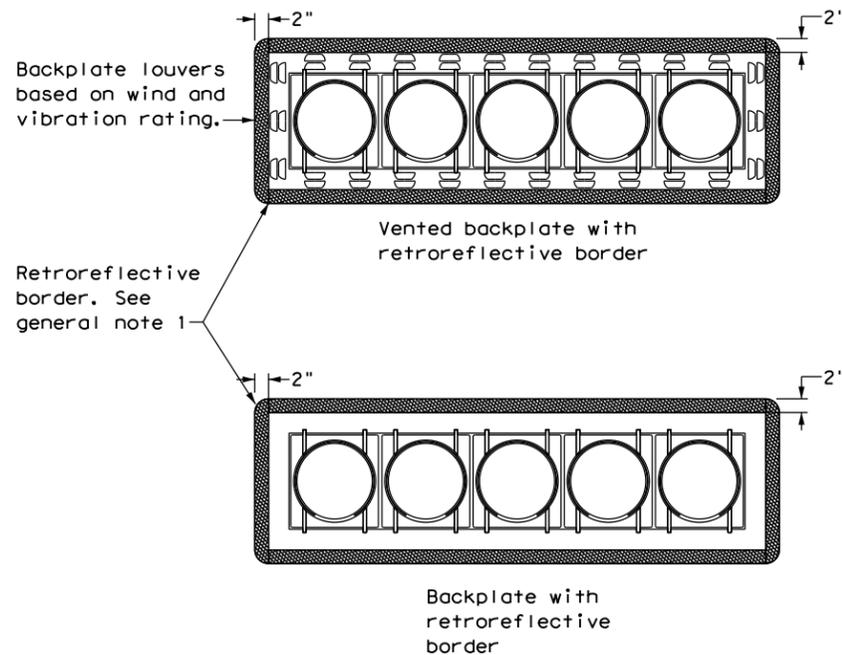


FIVE-SECTION HEAD
HORIZONTAL OR VERTICAL

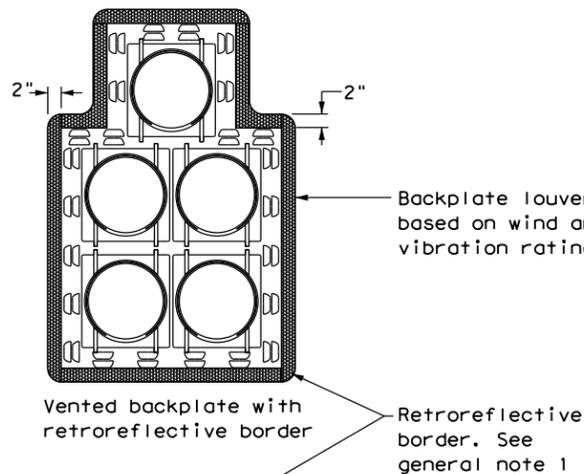

FIVE-SECTION HEAD
CLUSTER

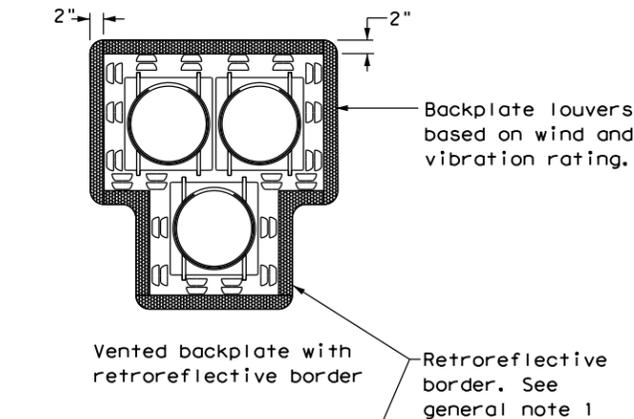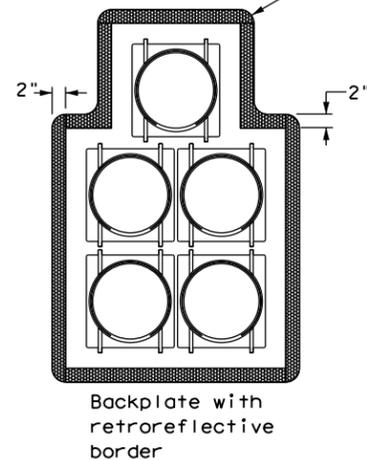

PEDESTRIAN HYBRID
BEACON

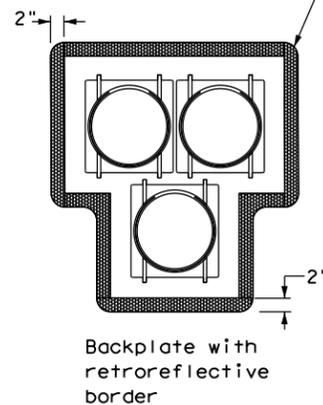

GENERAL NOTES:

1. Backplates are optional for traffic signals and pedestrian hybrid beacons. When backplates are used, a 2-inch wide fluorescent yellow AASHTO Type B_{FL} or C_{FL} retroreflective border conforming to TxDOT DMS-8300 is required. Place on all approaches when used.
2. Signal head and backplate compatibility must be verified by the contractor prior to installation.
3. When using backplates on signal heads, venting is preferred to reduce cyclic vibration stress.
4. When a vented backplate is used, the retroreflective border must not be placed over the louvers.
5. This standard sheet applies to all signal heads with backplates, including but not limited to:
 - Pole mounted
 - Overhead mounted
 - Span wire mounted
 - Mast arm mounted
 - Vertical signal heads
 - Horizontal signal heads
 - Clustered signal heads
 - Pedestrian hybrid beacons

		Traffic Safety Division Standard	
TRAFFIC SIGNAL HEAD WITH BACKPLATE TS-BP-20			
FILE: ts-bp-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT June 2020	CONT: 139201	SECT: 044	JOB: etc
REVISIONS	18	COUNTY: COLLIN	HIGHWAY: FM 1378
			SHEET NO.: 301

ROADWAY ILLUMINATION ASSEMBLY NOTES

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

1. Details apply to roadway lighting installations bid or referenced under Item 610, "Roadway Illumination Assemblies." Provide, furnish, and install all other materials not shown on the plans which may be necessary for complete and proper construction. Where manufacturers provide warranties or guarantees as a customary trade practice, furnish to the State such warranties or guarantees.
2. The locations of poles and fixtures may be shifted by the Engineer to accommodate local conditions. Install or remove poles and luminaires located near overhead electrical lines using established industry and utility safety practices and in accordance with laws governing such work. Consult with the appropriate utility company prior to beginning such work.
3. Provide new and unused materials. Ensure that all materials and installations comply with the applicable articles of the National Electrical Code (NEC), TxDOT standards and specifications, National Electrical Manufacturers Association (NEMA), and are listed by Underwriters Laboratories (UL) or a Nationally Recognized Testing Lab (NRTL). NRTLs such as Canadian Standard Association, Intertek Testing Services NA Inc., or FM Approvals LLC can be considered equivalent to UL. Faulty fabrication or poor workmanship in any material, equipment, or installation is justification for rejection.
4. Provide Roadway Illumination Light Fixtures as per TxDOT Departmental Material Specification (DMS) 11010, Item 610, and as shown on the Material Producers List (MPL) for Roadway Illumination and Electrical Supplies.
5. Fabricate steel roadway illumination poles in accordance with Roadway Illumination Poles (RIP) standards and Item 610. Poles fabricated according to RIP standards do not require shop drawing submittals.
 - a. Alternate designs to RIP standards or the use of aluminum to fabricate poles will require the submission of shop drawings electronically. For instructions on submitting shop drawings electronically see "Guide to Electronic Shop Drawing Submittal" on the TxDOT web site.
 - b. Limitations on use of the RIP standard: The RIP standard details were developed for installations in locations where the 3-second gust basic maximum wind speed is 110 mph, and where the elevation of the base of the pole is less than (i.e. not more than) 25' above the elevation of the surrounding terrain, in accordance with the "AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals," 6th Edition (2013) of the AASHTO Design Specifications. For poles to be installed in regions where the maximum basic wind speed exceeds 110 mph or to be mounted more than 25' above the surrounding terrain, provide poles meeting the following requirements:
 - i. Submittals. Following the electronic shop drawing submittal process (see Guide to Electronic Shop Drawing Submittal on the TxDOT web site), submit to the Engineer for approval fabrication drawings and calculations for the poles, sealed by a Texas licensed professional engineer (P.E.).
 - ii. Luminaire Structural Support Requirements. Provide light poles, arms, and anchor bolt assemblies with a 25 year design life to safely resist dead loads, ice loads and the required basic wind speeds at the location of installation in accordance with the 6th edition (2013) of the AASHTO Design Specifications. For transformer base poles, include transformer base and connecting hardware in calculations and shop drawing submittals. Structurally test all transformer bases to resist the theoretical plastic moment capacity of the pole. Submit certification of the plastic moment load test and FHWA breakaway requirement test of the model of base being furnished with the shop drawings. Show breakaway base model number, manufacturer's name, and logo on shop drawings. Include on manufacturer's shop drawings the ASTM designations for all materials to be used.
6. For both transformer and shoe-base type illumination poles, provide and install double-pole breakaway fuse holders as specified by DMS-11040. Breakaway fuse holders are listed on the MPL for Roadway Illumination and Electrical Supplies under Items 610 & 620. Provide 10 amp time delay fuses for breakaway connectors in light poles, or inside the light fixture for underpass luminaires. In each pole, connect luminaires to the breakaway connector with continuous stranded 12 AWG copper conductors as listed on the MPL. Bond all equipment grounding conductors together and to the ground lug in the transformer base or hand hole.
7. Tighten anchor bolts for shoe base, concrete traffic barrier base, and bridge mount roadway illumination poles, in accordance with Item 449.
8. Install T-Base with following procedure:
 - a. Anchor Bolt Tightening.
 - i. Coat the threads of the anchor bolts with electrically conductive lubricant.
 - ii. Place the T-base over the anchor bolts. Foundation must be level and flat. The maximum permissible gap under any one corner of the t-base is 1/8" before nuts are tightened.
 - iii. Coat the bearing surfaces of the nuts and washers with electrically conductive lubricant. Install (1) 1/2" hold down washer, (1) lock washer, and (1) nut on each anchor bolt. Turn the nuts onto the bolts so that each is hand-tight against the washer.
 - iv. Using a torque wrench, tighten each nut to 150 ft-lb. Uniform contact is required between the foundation and the T-base in the corner regions of the T-base, and all corner gaps must be closed after applying torque. If a gap still exists after torquing to 150 ft-lbs, continue torquing each bolt incrementally until gap is closed or maximum allowable torque of 250 ft. pound is reached, whichever comes first. If 250 ft-lbs is not enough to close the gap the foundation must be leveled. Gaps along the straight sides of the T-bases and the foundation are permissible. Ensure that no high point of contact occurs between the straight sides of the T-base and the foundation.
 - v. Check top of T-base for level. If not level then foundation must be leveled.
 - b. Top Bolt Procedure
 - i. Erect pole over T-base with crane. Coat bolts, nuts, washers, and lock washers with electrically conductive lubricant.

- ii. Install bolts and 1/2" connecting washers from the inside of the T-base, thread up through the pole base. Install flat washers, lock washers and nuts snug tight according to Item 447, "Structural Bolting."
 - iii. Tighten each nut to 150 ft-lb. using a torque wrench.
- c. Level and Plumb
- i. Ensure pole is plumb and mast arm is perpendicular to the roadway according to plans to within 5 degrees.


9. Construct luminaire pole foundations in accordance with Item 416, "Drilled Shaft Foundations," and TxDOT standard sheet RID(2).
10. Provide and install underpass luminaires in accordance with Item 610, DMS-11010, and TxDOT standard sheet RID(3). Typical luminaire size for underpass luminaires is 150W HPS or 150W EQ LED.
11. Mount luminaires on arms level as shown by the luminaire level indicator.
12. Orient luminaires perpendicular to the roadway intended to be lit unless otherwise shown on the plans.

Wiring Diagram Notes:

- ① Use 1/2 in. -13 UNC threaded, copper or tin-plated copper, pole bonding connector, sized appropriately for conductors, bonded to T-base, or use ground lug in handhole as available.
- ② Use pre-qualified two-pole breakaway connectors for all luminaire pole installations. For luminaires fed by a circuit with a neutral conductor, use double pole breakaway connectors with the neutral side unfused and marked white.
- ③ Split Bolt or other connector.


Decorative LED Lighting Notes:

1. LED Drivers in Remote Outdoor enclosures (for drivers that do not include an enclosure as part of a factory assembly):
 - a. Provide NEMA 3R outdoor enclosure or as approved.
 - b. Install enclosure at least 12" above ground or other horizontal surface. Mount vertically or on ceiling, and avoid direct sun where possible.
 - c. Install drivers with at least 2 inches of space from enclosure walls.
 - d. For multiple drivers in an enclosure, provide at least 4 inches side to side and 1 inch end to end from other drivers or electronic equipment
 - e. For drivers mounted on back wall of enclosure, mount enclosure on 1 5/8" strut or other standoff to dissipate heat, or mount driver to side of the enclosure or to the metal cover.
 - f. Provide remote drivers with a maximum of 100 watts
 - g. Provide drivers with documentation of 100,000 hr lifetime at Tcase of 65C or higher.

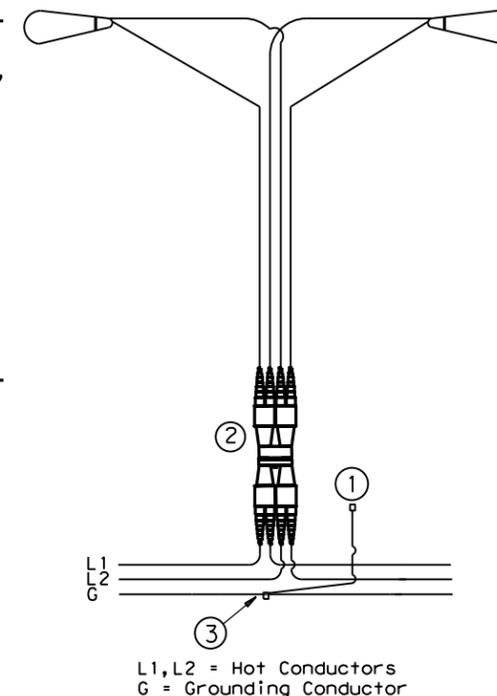

TYPICAL WIRING DIAGRAM

LUMINAIRES SERVED AT 480V ON 240/480 VOLT SERVICE OR LUMINAIRES SERVED AT 240V FOR 120/240 VOLT SERVICE.

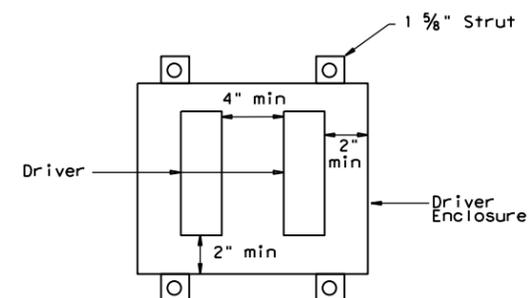

Driver Spacing In Remote Enclosure


		Traffic Safety Division Standard	
<h3>ROADWAY ILLUMINATION DETAILS</h3> <h2>RID(1)-20</h2>			
FILE: rid1-20.dgn	DN: 1392	CK: 01	DW: 044.etc
© TxDOT January 2007	CONT: 18	SECT: COLLIN	JOB: FM 1378
7-17	DIST: 18	COUNTY: COLLIN	SHEET NO. 302
12-20			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any kind of information into digital format or for incorrect results or damages resulting from its use.

DATE: 10/20/2020 2:35:30 PM
 FILE: C:\Users\MABOSO\Desktop\PROJECTS\FM 1378 SIGNING STANDARDS WITH PRINTS\FM1378.dwg

REQUIREMENTS FOR INDEPENDENT MOUNTED ROUTE SIGNS



SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	ALL OTHERS	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE A SHEETING
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND & BORDERS	ALL OTHERS	TYPE B or C SHEETING



TYPICAL EXAMPLES

REQUIREMENTS FOR BLUE, BROWN & GREEN D AND I SERIES GUIDE SIGNS

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	ALL	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE D SHEETING
LEGEND, SYMBOLS & BORDERS	ALL OTHERS	TYPE B OR C SHEETING



TYPICAL EXAMPLES

GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- White legend shall use the Clearview Alphabet. The following Clearview fonts shall be used to replace the existing white Federal Highway Administration (FHWA) Standard Highway Alphabets, when not specified in the SHSD, or in the plans.

B	CV-1W
C	CV-2W
D	CV-3W
E	CV-4W
Emod	CV-5WR
F	CV-6W
- Route sign legend (ie. IH, US, SH and FM shields) shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets B, C, D, E, Emod or F).
- Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Independent mounted route sign with white or colored legend and borders shall be applied by screening process with transparent color ink, transparent colored overlay film to white background sheeting or cut-out white sheeting to colored background sheeting, or combination thereof. White legend, symbols and borders on all other signs shall be cut-out white sheeting applied to colored background sheeting.
- Information regarding borders and radii for signs is found in the "Standard Highway Sign Designs for Texas". Dimensions shown and described for borders and corner radii on parent sign are nominal. Borders may vary in width as much as 1/2 inch. Corner radii above 3 inches may vary in width as much as 1 inch. Borders and corner radii within a parent sign must be of matching widths. The sign area outside the corner radius should be trimmed or rounded.
- Sign substrate shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative.
- Mounting details of roadside signs are shown in the "SMD series" Standard Plan Sheets.

DEPARTMENTAL MATERIAL SPECIFICATIONS	
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080
7.5 to 15	0.100
Greater than 15	0.125


The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website:
<http://www.txdot.gov/>

		Traffic Operations Division Standard	
<h3>TYPICAL SIGN REQUIREMENTS</h3> <h4>TSR(3) - 13</h4>			
FILE:	tsr3-13.dgn	DN:	TxDOT
©TxDOT	October 2003	CK:	TxDOT
REVISIONS		DW:	TxDOT
12-03	7-13	CONT	SECT
9-08		1392	01
		JOB	HIGHWAY
		044	FM1378
		DIST	COUNTY
		DAL	COLLIN
		SHEET NO.	303

DATE: 10/20/2020 2:35:31 PM
 FILE: C:\Users\maboso\Desktop\PROJECTS\FM 1378 SIGNING STANDARDS WITH PRINTS\FM1378-04.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any kind of information into digital format or for incorrect results or damages resulting from its use.

REQUIREMENTS FOR RED BACKGROUND REGULATORY SIGNS

(STOP, YIELD, DO NOT ENTER AND WRONG WAY SIGNS)

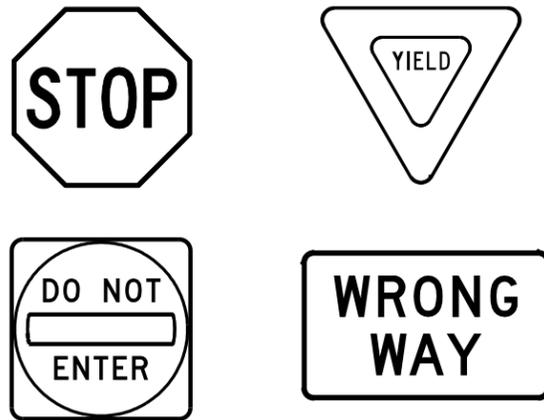

REQUIREMENTS FOR FOUR SPECIFIC SIGNS ONLY

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	WHITE	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE B OR C SHEETING
LEGEND	RED	TYPE B OR C SHEETING

REQUIREMENTS FOR WHITE BACKGROUND REGULATORY SIGNS


(EXCLUDING STOP, YIELD, DO NOT ENTER AND WRONG WAY SIGNS)



TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	ALL OTHERS	TYPE B OR C SHEETING
LEGEND, BORDERS AND SYMBOLS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND, BORDERS AND SYMBOLS	ALL OTHER	TYPE B OR C SHEETING

REQUIREMENTS FOR WARNING SIGNS

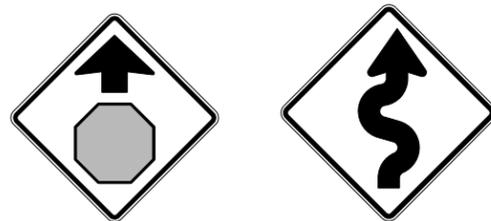

TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	FLOURESCENT YELLOW	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND & SYMBOLS	ALL OTHER	TYPE B OR C SHEETING

REQUIREMENTS FOR SCHOOL SIGNS



TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	FLOURESCENT YELLOW GREEN	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND, BORDERS AND SYMBOLS	BLACK	ACRYLIC NON-REFLECTIVE FILM
SYMBOLS	RED	TYPE B OR C SHEETING

GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- Sign legend shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets (B, C, D, E, Emod or F).
- Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Black legend and borders shall be applied by screening process or cut-out acrylic non-reflective black film to background sheeting, or combination thereof.
- White legend and borders shall be applied by screening process with transparent colored ink, transparent colored overlay film to white background sheeting or cut-out white sheeting to colored background sheeting, or combination thereof.
- Colored legend shall be applied by screening process with transparent colored ink, transparent colored overlay film or colored sheeting to background sheeting, or combination thereof.
- Sign substrate shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative.
- Mounting details for roadside mounted signs are shown in the "SMD series" Standard Plan Sheets.

ALUMINUM SIGN BLANKS THICKNESS

Square Feet	Minimum Thickness
Less than 7.5	0.080
7.5 to 15	0.100
Greater than 15	0.125

DEPARTMENTAL MATERIAL SPECIFICATIONS

ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website.

<http://www.txdot.gov/>



TYPICAL SIGN REQUIREMENTS

TSR(4) - 13


FILE:	tsr4-13.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	October 2003	CONT	SECT	JOB	HIGHWAY				
REVISIONS		1392	01	044	FM1378				
12-03	7-13	DIST	COUNTY	SHEET NO.					
9-08		DAL	COLLIN	304					

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 10/20/2020 2:35:32 PM
 FILE: C:\Users\WABOSOV\Desktop\PROJECTS\FM 1378 SIGNING STANDARDS WITH PRINTS\FM1378-01.dwg

ARROW DETAILS


for Large Ground-Mounted and Overhead Guide Signs




Type A




Type B



E-3



E-4



Down Arrow

TYPE	LETTER SIZE	USE
A-1	10.67" U/L and 10" Caps	Single Lane Exits
A-2	13.33" U/L and 12" Caps	
A-3	16" & 20" U/L	
B-1	10.67" U/L and 10" Caps	Multiple Lane Exits
B-2	13.33" U/L and 12" Caps	
B-3	16" & 20" U/L	

CODE	USED ON SIGN NO.
E-3	E5-1aT
E-4	E5-1bT


NOTE

Arrow dimensions are shown in the "Standard Highway Sign Designs for Texas" manual.

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website.


<http://www.txdot.gov/>

SIGN BLANK PUNCHING DETAILS FOR ATTACHMENTS WHEN SPECIFIED TO BE TYPE A ALUMINUM SIGNS (FOR MOUNTING TO GUIDE SIGN FACE)

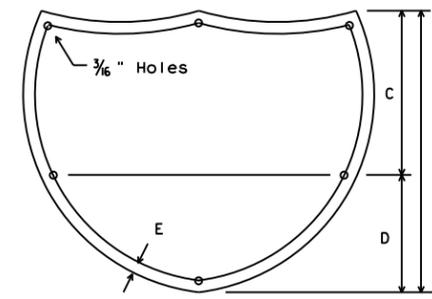


INTERSTATE ROUTE MARKERS

A	C	D	E
36	21	15	1 1/2
48	28	20	1 3/4

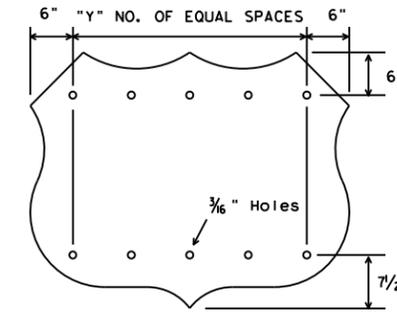


U.S. ROUTE MARKERS

Sign Size	"Y"
24x24	2
30x24	3
36x36	3
45x36	4
48x48	4
60x48	5

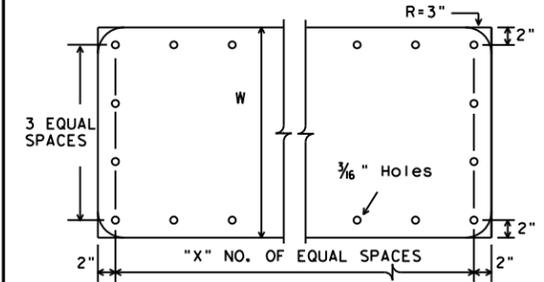


STATE ROUTE MARKERS

No. of Digits	W	X
4	24	4
4	36	5
4	48	6
3	24	3
3	36	4
3	48	5

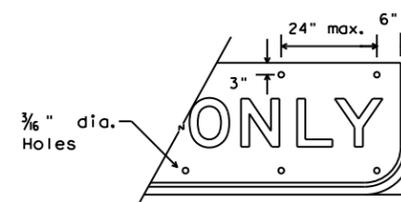

EXIT ONLY PANEL


MOUNTING DETAILS OF ATTACHMENTS TO GUIDE SIGN FACE ("EXIT ONLY" AND "LEFT EXIT" PANELS, ROUTE MARKERS AND OTHER ATTACHMENTS)

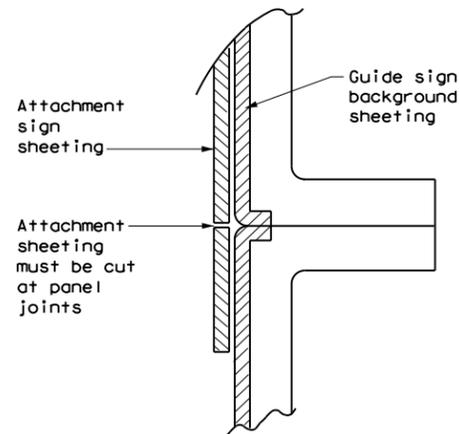


DIRECT APPLIED ATTACHMENT

NOTE:

- Sheeting for legend, symbols, and borders must be cut at panel joints.
- Direct applied attachment signs will be subsidiary to "Aluminum Signs" or "Fiberglass Signs".

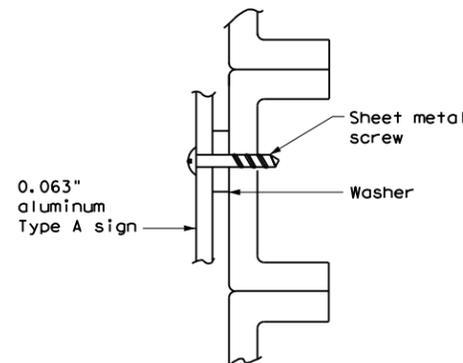

SCREW ATTACHMENT

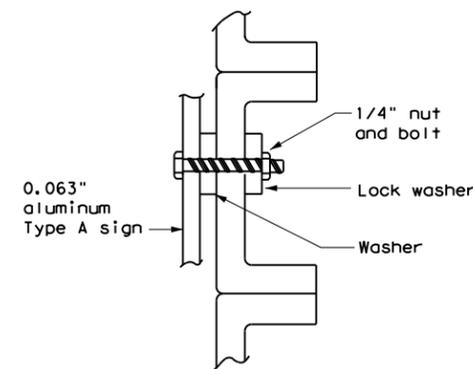


NUT/BOLT ATTACHMENT


NOTE:

Furnish Type A aluminum sign attachments only when specified in the plans. These signs will be paid for under "Aluminum Signs".

ARROW DETAILS for Destination Signs (Type D)



Standard arrow to be used with 6 inch letters.



Standard arrow to be used with 8 inch letters.



TYPICAL SIGN REQUIREMENTS

TSR (5) - 13

FILE: tsr5-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2003	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044	FM1378
12-03 7-13	DIST	COUNTY	SHEET NO.	
9-08	DAL	COLLIN	305	

DATE: 10/20/2020 2:35:33 PM
 FILE: C:\Users\mabosov\Desktop\PROJECTS\FM 1378 SIGNING STANDARDS WITH PRINT SET\SMDGEN - 08.DGN
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

SIGN SUPPORT DESCRIPTIVE CODES

(Descriptive Codes correspond to project estimate and quantities sheets)

SM RD SGN ASSM TY XXXXX(X)XX(X-XXXX)


Post Type
 FRP = Fiberglass Reinforced Plastic Pipe (see SMD(FRP))
 TWT = Thin-Walled Tubing (see SMD(TWT))
 10BWG = 10 BWG Tubing (see SMD(SLIP-1) to (SLIP-3))
 S80 = Schedule 80 Pipe (see SMD(SLIP-1) to (SLIP-3))

Number of Posts (1 or 2)

Anchor Type
 UA = Universal Anchor - Concreted (see SMD(FRP) and (TWT))
 UB = Universal Anchor - Bolted down (see SMD(FRP) and (TWT))
 WS = Wedge Anchor Steel - (see SMD(TWT))
 WP = Wedge Anchor Plastic (see SMD(TWT))
 SA = Slipbase - Concreted (see SMD(SLIP-1) to (SLIP-3))
 SB = Slipbase - Bolted Down (see SMD(SLIP-1) to (SLIP-3))



Sign Mounting Designation
 P = Prefab. "Plain" (see SMD(SLIP-1) to (SLIP-3), (TWT), (FRP))
 T = Prefab. "T" (see SMD(SLIP-1) to (SLIP-3), (TWT))
 U = Prefab. "U" (see SMD(SLIP-1) to (SLIP-3))
 IF REQUIRED
 1EXT or 2EXT = Number of Extensions (see SMD(SLIP-1) to (SLIP-3), (TWT))
 BM = Extruded Wind Beam (see SMD(SLIP-1) to (SLIP-3))
 WC = 1.12 #/ft Wing Channel (see SMD(SLIP-1) to (SLIP-3))
 EXAL = Extruded Aluminum Sign Panels (see SMD(SLIP-3))

REQUIRED CLEARANCE FOR BREAKAWAY SUPPORT



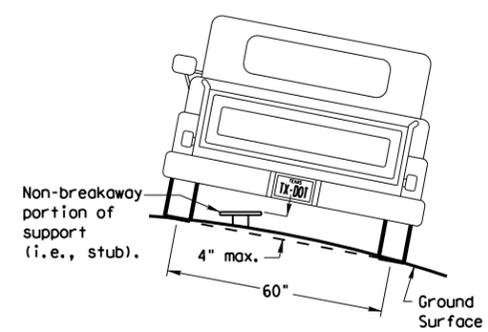


To avoid vehicle undercarriage snagging, any substantial remains of a breakaway support, when it is broken away, should not project more than 4 inches above a 60-inch chord (i.e., typical space between wheel paths).


SIGN LOCATION

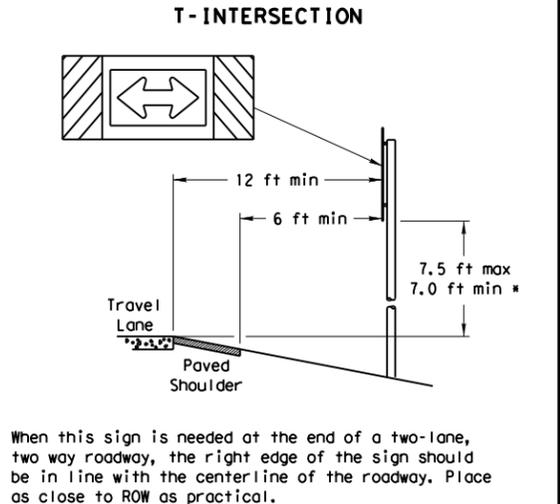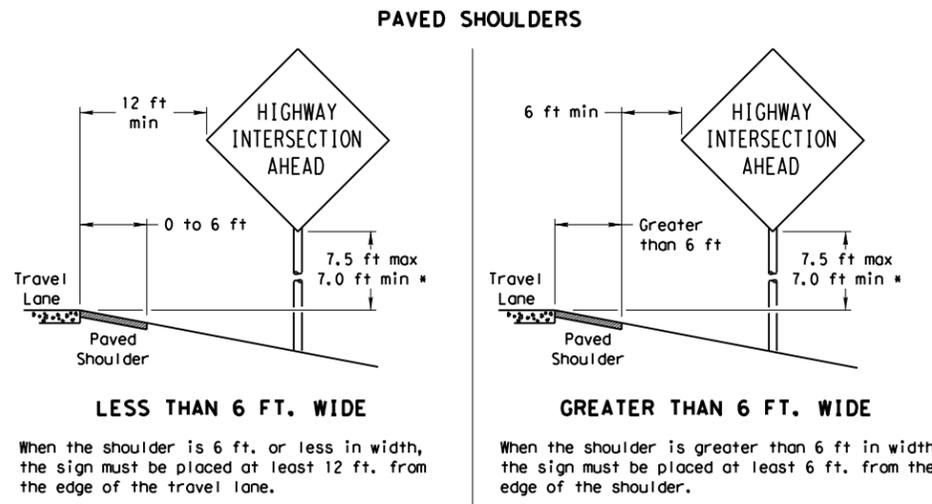

No more than 2 sign posts should be located within a 7 ft. circle.

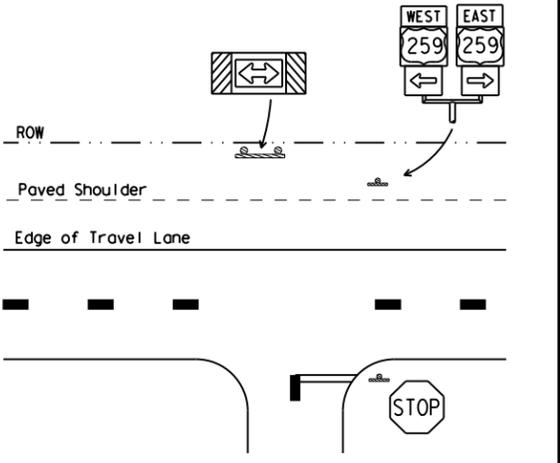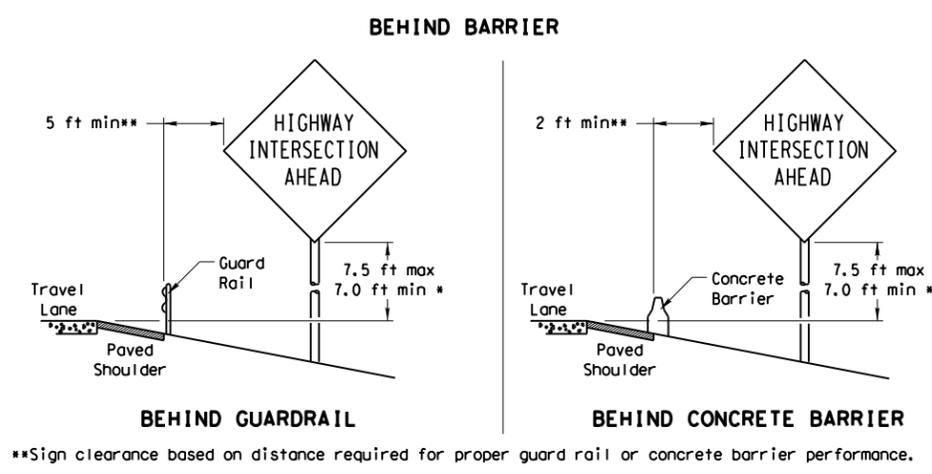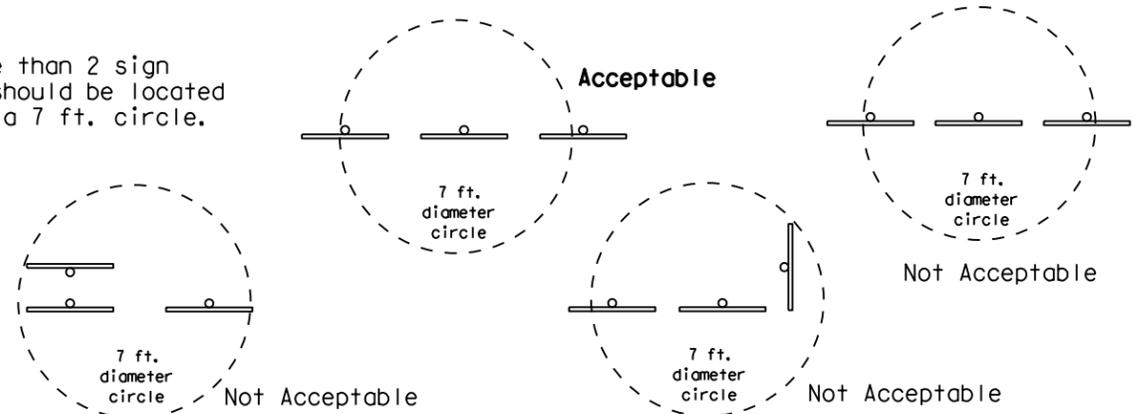

TYPICAL SIGN ATTACHMENT DETAIL

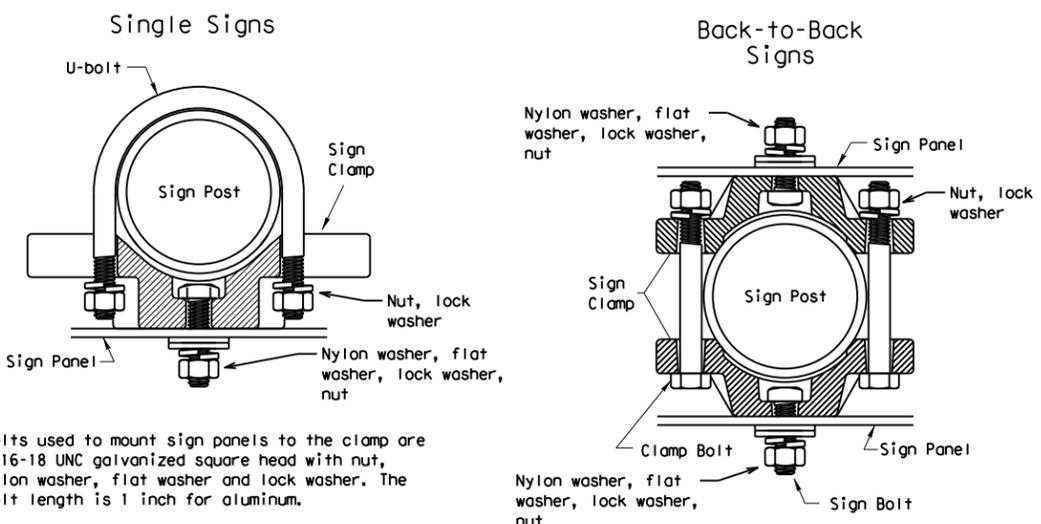


Bolts used to mount sign panels to the clamp are 5/16-18 UNC galvanized square head with nut, nylon washer, flat washer and lock washer. The bolt length is 1 inch for aluminum.

When two sign clamps are used to mount signs back-to-back, use a 5/16-18 UNC galvanized hex head per ASTM A307 with nut and helical-spring lock washer. The approximate bolt lengths for various post sizes and sign clamp types are given in the table at right. The bolt length may need to be adjusted depending upon field conditions.


Sign clamps may be either the specific size clamp or the universal clamp.

Pipe Diameter	Approximate Bolt Length	
	Specific Clamp	Universal Clamp
2" nominal	3"	3 or 3 1/2"
2 1/2" nominal	3 or 3 1/2"	3 1/2 or 4"
3" nominal	3 1/2 or 4"	4 1/2"


SIGNS WITH PLAQUES

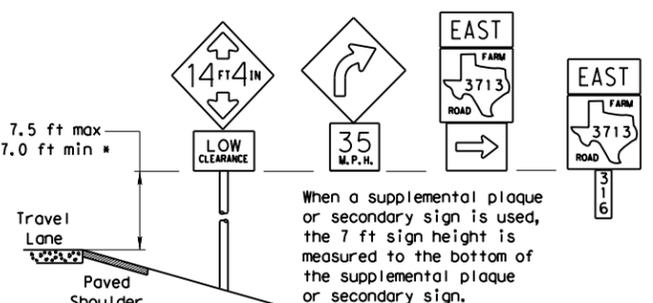

CURB & GUTTER OR RAISED ISLAND

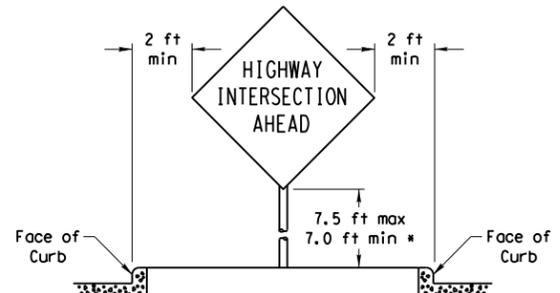

RESTRICTED RIGHT-OF-WAY (When 6 ft min. is not possible.)

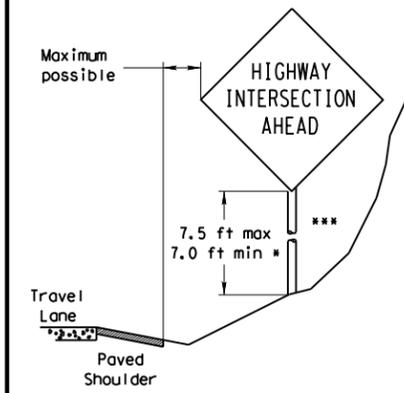

Right-of-way restrictions may be created by rocks, water, vegetation, forest, buildings, a narrow island, or other factors.

In situations where a lateral restriction prevents the minimum horizontal clearance from the edge of the travel lane, signs should be placed as far from the travel lane as practical.

*** Post may be shorter if protected by guardrail or if Engineer determines the post could not be hit due to extreme slope.

- * Signs shall be mounted using the following condition that results in the greatest sign elevation:
- (1) a minimum of 7 to a maximum of 7.5 feet above the edge of the travel lane or
 - (2) a minimum of 7 to a maximum of 7.5 feet above the grade at the base of the support when sign is installed on the backslope.
- The maximum values may be increased when directed by the Engineer.
- See the Traffic Operations Division website for detailed drawings of sign clamps, Triangular Slipbase System components and Wedge Anchor System components.
- The website address is:
<http://www.txdot.gov/publications/traffic.htm>







SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS GENERAL NOTES & DETAILS

SMD(GEN) - 08


© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		1392	01	044	FM1378
		DIST	COUNTY		SHEET NO.
		DAL	COLLIN		306

TRIANGULAR SLIPBASE INSTALLATION GENERAL REQUIREMENTS

NOTE
The devices shall be installed per manufacturers' recommendations. Installation procedures shall be provided to the Engineer by Contractor.

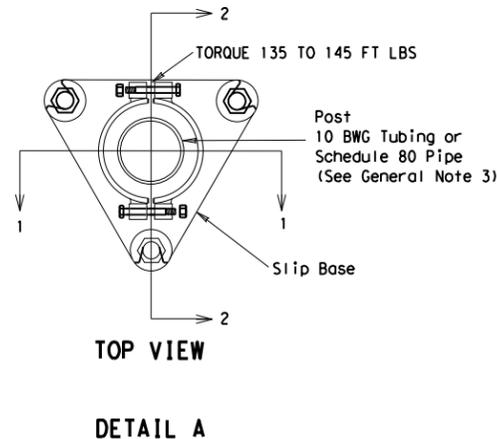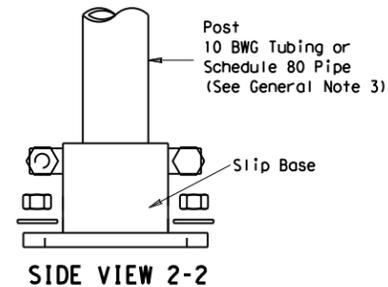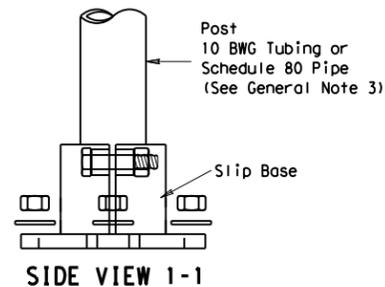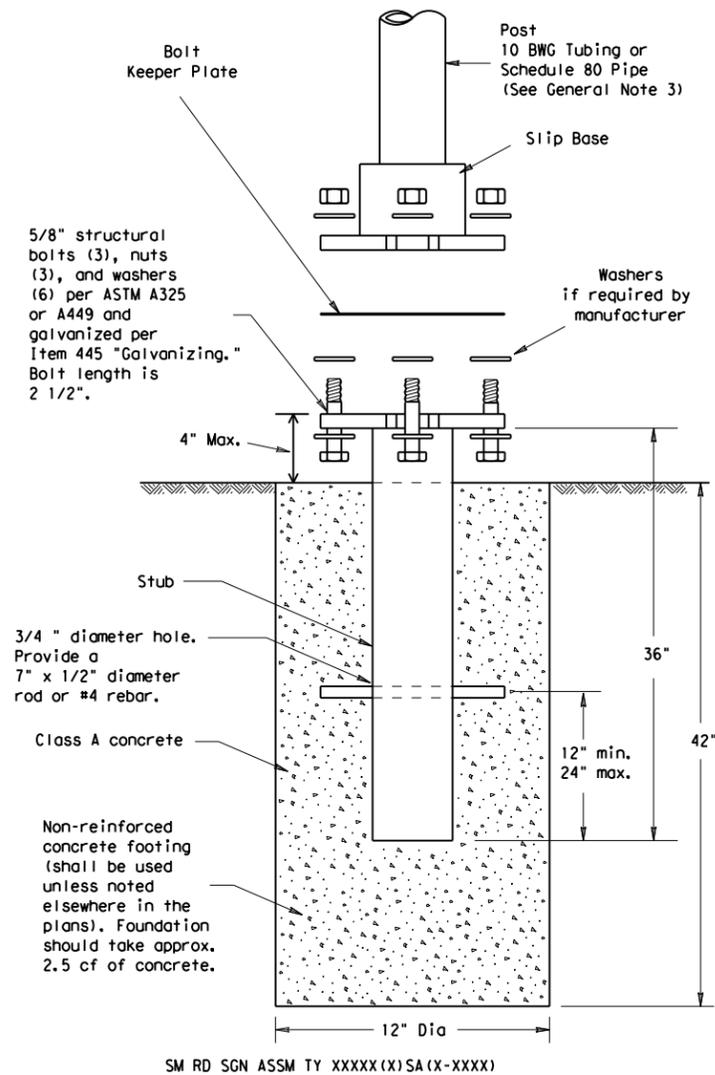

CONCRETE ANCHOR

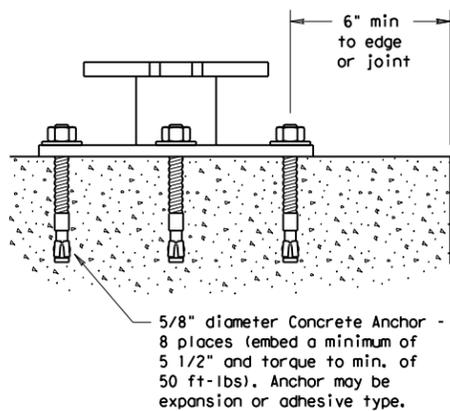

Concrete anchor consists of 5/8" diameter stud bolt with UNC series bolt threads on the upper end. Heavy hex nut per ASTM A563, and hardened washer per ASTM F436. The stud bolt shall have a minimum yield and ultimate tensile strength of 50 and 75 KSI, respectively. Nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing." Adhesive type anchors shall have stud bolts installed with Type III epoxy per DMS-6100, "Epoxyes and Adhesives." Adhesive anchors may be loaded after adequate epoxy cure time per the manufacturer's recommendations. Top of bolt shall extend at least flush with top of the nut when installed. The anchor, when installed in 4000 psi normal-weight concrete with a 5 1/2" minimum embedment, shall have a minimum allowable tension and shear of 3900 and 3100 psi, respectively.

SM RD SGN ASSM TY XXXXX(X)SB(X-XXXX)

GENERAL NOTES:

- Slip base shall be permanently marked to indicate manufacturer. Method, design, and location of marking are subject to approval of the TxDOT Traffic Standards Engineer.
- Material used as post with this system shall conform to the following specifications:
 - 10 BWG Tubing (2.875" outside diameter)
 - 0.134" nominal wall thickness
 - Seamless or electric-resistance welded steel tubing or pipe
 - Steel shall be HSLAS Gr 55 per ASTM A1011 or ASTM A1008
 - Other steels may be used if they meet the following:
 - 55,000 PSI minimum yield strength
 - 70,000 PSI minimum tensile strength
 - 20% minimum elongation in 2"
 - Wall thickness (uncoated) shall be within the range of 0.122" to 0.138"
 - Outside diameter (uncoated) shall be within the range of 2.867" to 2.883"
 - Galvanization per ASTM A123 or ASTM A653 G210. For precoated steel tubing (ASTM A653), recoat tube outside diameter weld seam by metallizing with zinc wire per ASTM B833.
 - Schedule 80 Pipe (2.875" outside diameter)
 - 0.276" nominal wall thickness
 - Steel tubing per ASTM A500 Gr C
 - Other seamless or electric-resistance welded steel tubing or pipe with equivalent outside diameter and wall thickness may be used if they meet the following:
 - 46,000 PSI minimum yield strength
 - 62,000 PSI minimum tensile strength
 - 21% minimum elongation in 2"
 - Wall thickness (uncoated) shall be within the range of 0.248" to 0.304"
 - Outside diameter (uncoated) shall be within the range of 2.855" to 2.895"
 - Galvanization per ASTM A123
- See the Traffic Operations Division website for detailed drawings of sign clamps and Texas Universal Triangular Slipbase System components. The website address is: <http://www.txdot.gov/publications/traffic.htm>
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.

ASSEMBLY PROCEDURE

Foundation

- Prepare 12-inch diameter by 42-inch deep hole. If solid rock is encountered, the depth of the foundation may be reduced such that it is embedded a minimum of 18 inches into the solid rock.
- The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor-driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Concrete shall be Class A.
- Push the pipe end of the slip base stub into the center of the concrete. Rotate the stub back and forth while pushing it down into the concrete to assure good contact between the concrete and stub. Continue to work the stub into the concrete until it is between 2 to 4 inches above the ground.
- Plumb the stub. Allow a minimum of 4 days to set, unless otherwise directed by the Engineer.
- The triangular slipbase system is multidirectional and is designed to release when struck from any direction.

Support

- Cut support so that the bottom of the sign will be 7 to 7.5 feet above the edge of the travelway (i.e., edge of the closest lane) when slip plate is below the edge of pavement or 7 to 7.5 feet above slip plate when the slip plate is above the edge of the travelway. The cut shall be plumb and straight.
- Attach sign to support using connections shown. When multiple signs are installed on the same support, ensure the minimum clearance between each sign is maintained. See SMD(SLIP-2) for clearances based on sign types.

ADDED DETAIL A FOR CLAMP BASE

10-2010

Texas Department of Transportation
Dallas District Standard

SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS TRIANGULAR SLIPBASE SYSTEM

SMD(SLIP-1)-08(DAL)

© TxDOT July 2002	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT	
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
12-10 (DISTRICT)		1392	01	044	FM1378
ADDED CLAMP BASE		DIST	COUNTY		SHEET NO.
DETAIL FOR SLIP		DAL	COLLIN		307
BASE INSTALLATION					

26B















DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DISCLAIMER:

10/20/2020 2:35:34 PM C:\Users\mabosov\Desktop\PROJECTS\FM 1378 SIGNING STANDARDS WITH PRINT SET\SMD (slip-1) -08 dal.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 10/20/2020 2:35:34 PM
 FILE: C:\Users\mabosov\Desktop\PROJECTS\FM 1378 SIGNING STANDARDS WITH PRINT SET\SMD (SLIP-2) - 08.DGN

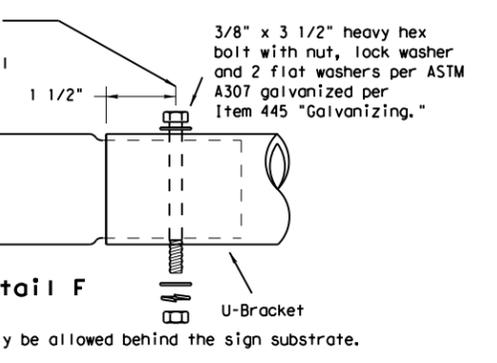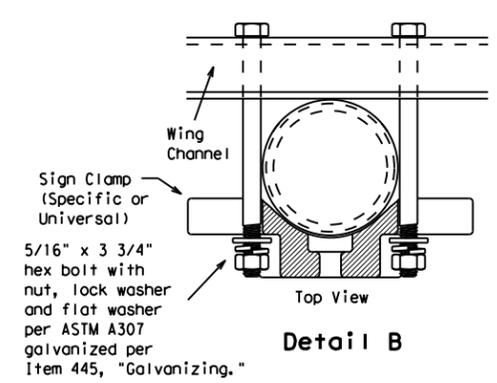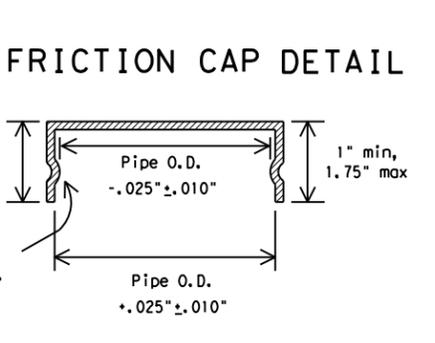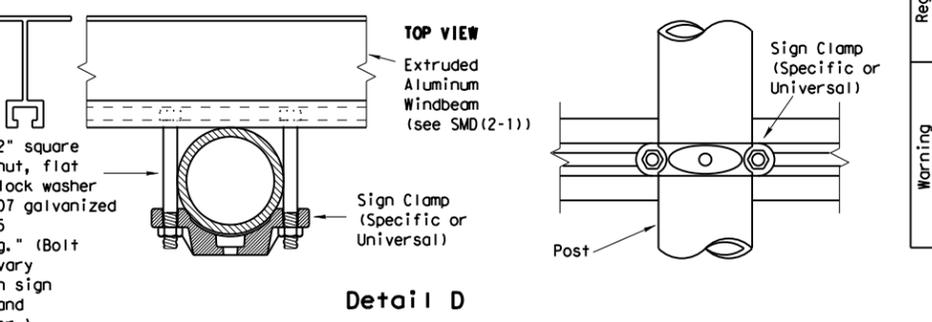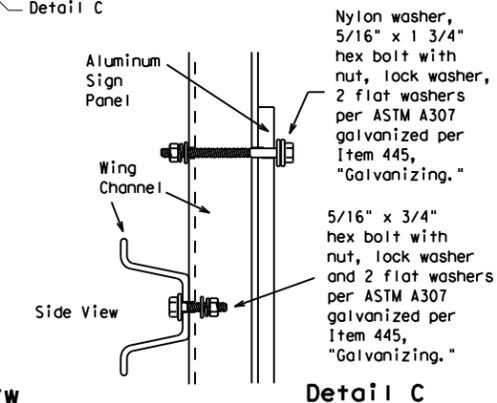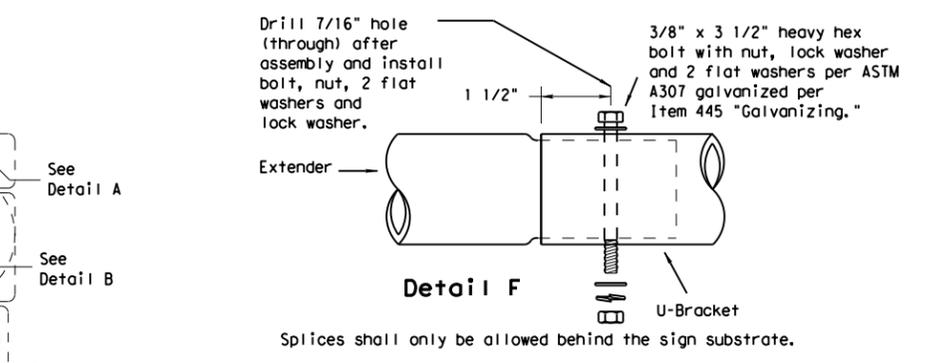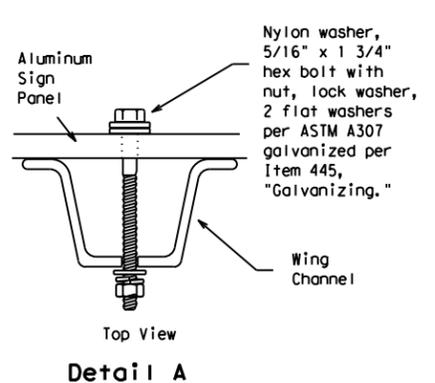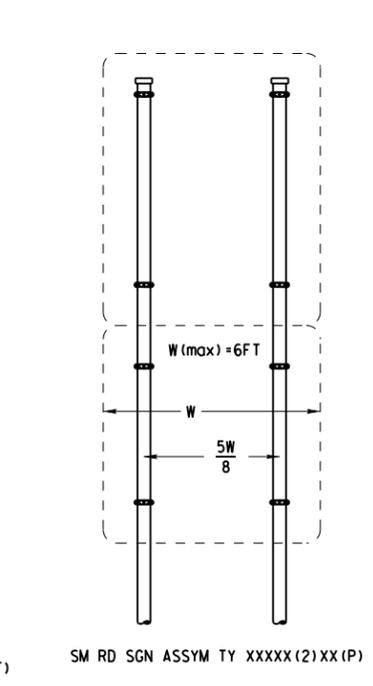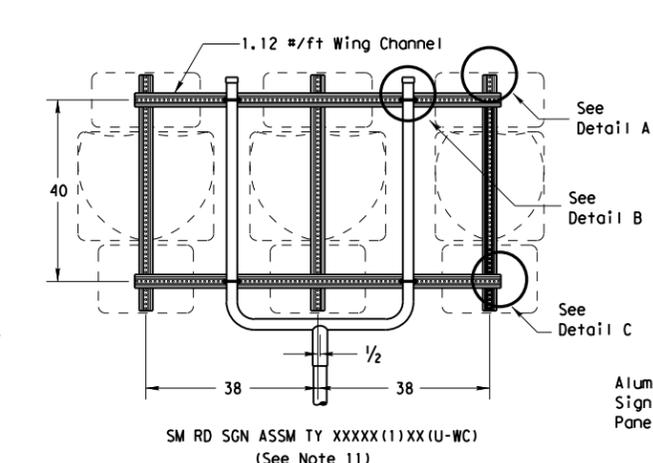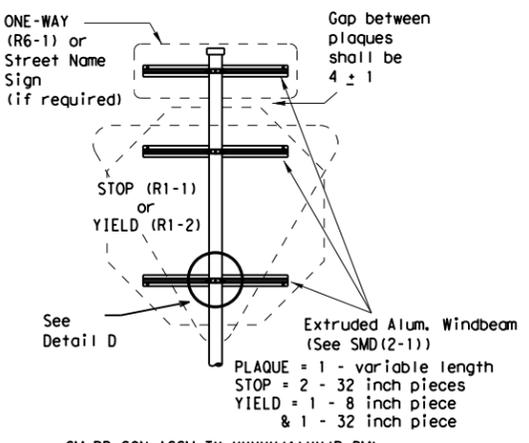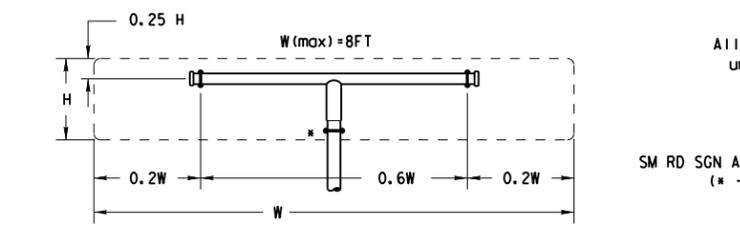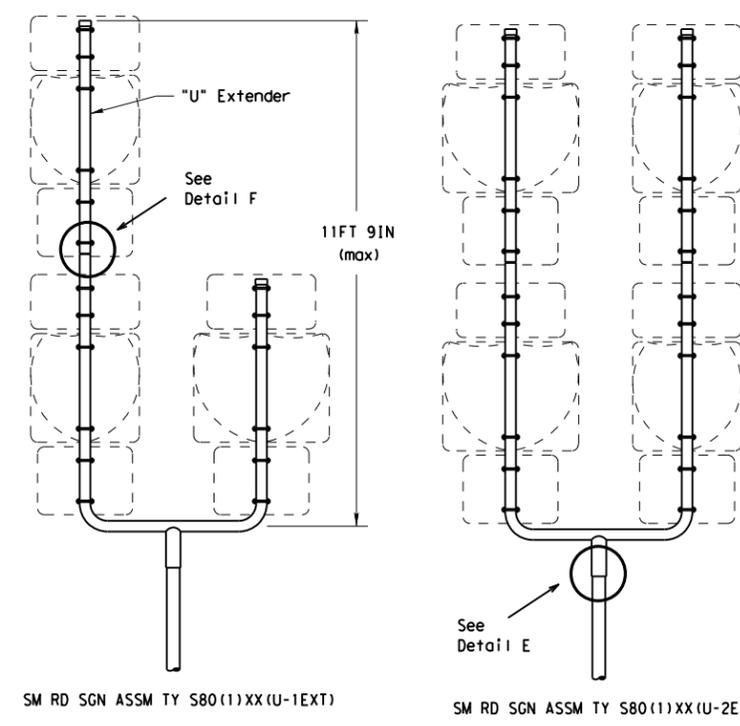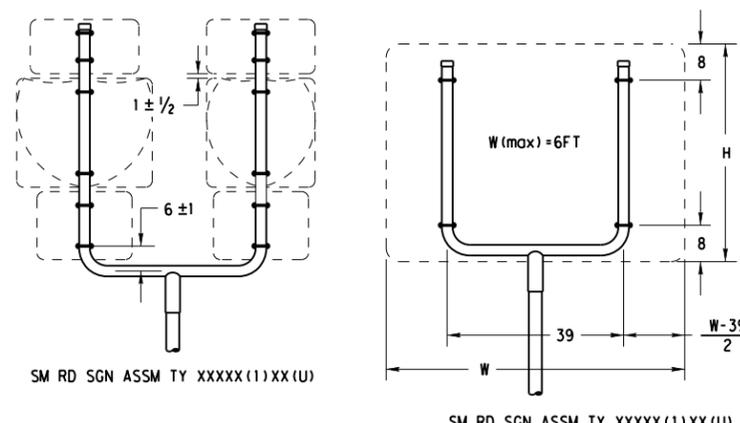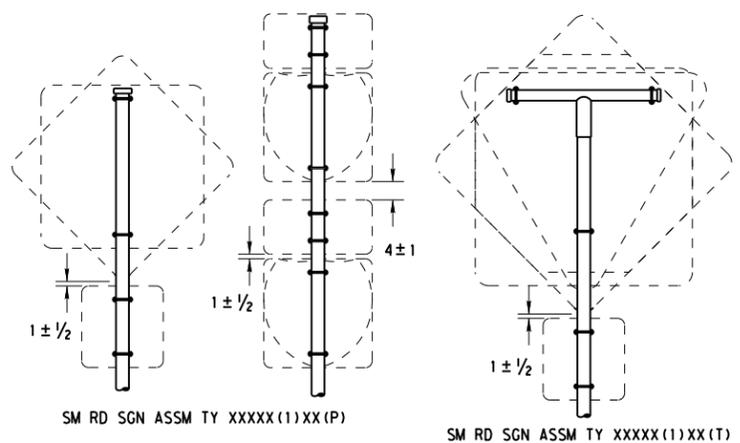

GENERAL NOTES:

SIGN SUPPORT	# OF POSTS	MAX. SIGN AREA
10 BWG	1	16 SF
10 BWG	2	32 SF
Sch 80	1	32 SF
Sch 80	2	64 SF

- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Additional route markers may be added vertically, provided the total sign area does not exceed the maximum allowable amount per Note 1.
- Additional sign clamp required on the "T-bracket" post for 24 inch height signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.
- Sign blanks shall be the sizes and shapes shown on the plans.

	REQUIRED SUPPORT	
	SIGN DESCRIPTION	SUPPORT
Regulatory	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
Warning	48x60-inch signs	TY S80(1)XX(T)
	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
	48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)
	Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)











Friction caps may be manufactured from hot rolled or cold rolled steel sheets. The minimum sheet metal thickness shall be 24 gauge for all cap sizes. The rim edges shall be reasonably straight and smooth. Caps shall be sized and formed in such a manner as to produce a drive-on friction fit and have no tendency to rock when seated on the pipe. The depth shall be sufficient to give positive protection against entrance of rainwater. They shall be free of sharp creases or indentations and show no evidence of metal fracture. Caps shall have an electrodeposited coating of zinc in accordance with the requirements of ASTM B633 Class FE/ZN 8.

Texas Department of Transportation
 Traffic Operations Division

SIGN MOUNTING DETAILS
SMALL ROADSIDE SIGNS
TRIANGULAR SLIPBASE SYSTEM
SMD(SLIP-2) - 08

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		1392	01	044	FM1378
		DIST	COUNTY		SHEET NO.
		DAL	COLLIN		308

DATE: 10/20/2020 2:35:35 PM
 FILE: C:\Users\maboso\Desktop\PROJECTS\FM 1378 SIGNING STANDARDS WITH PRINT SET\SMD (SLIP-3) - 08.DGN
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

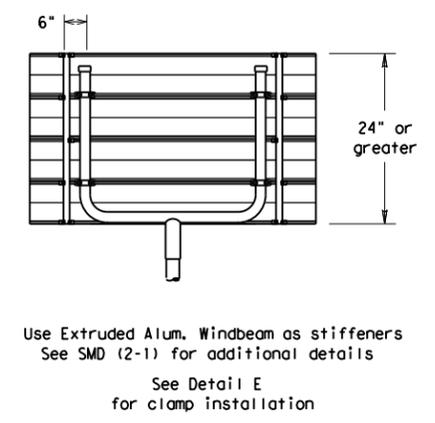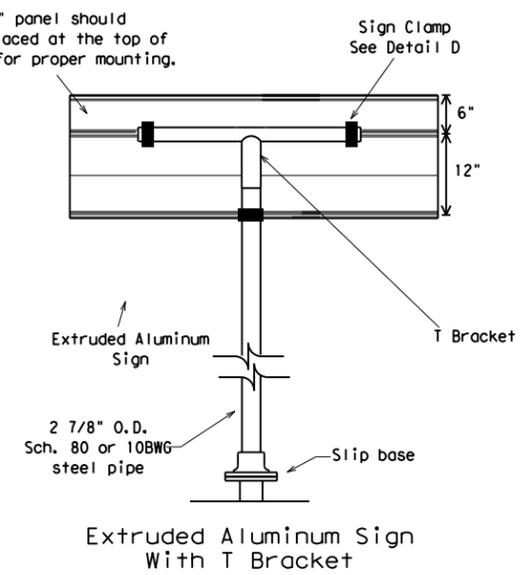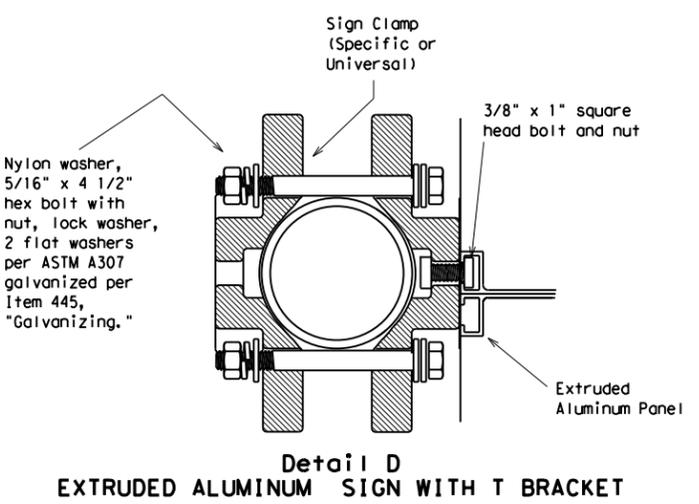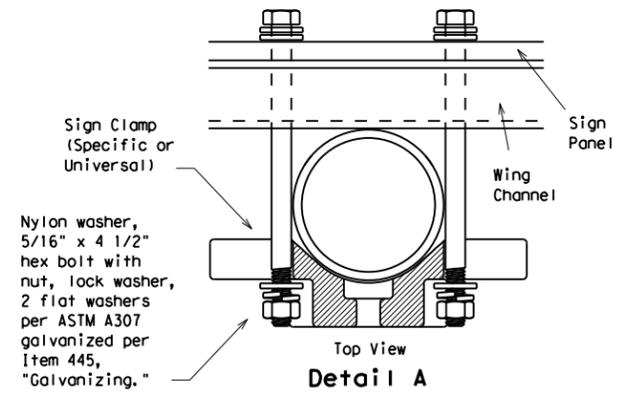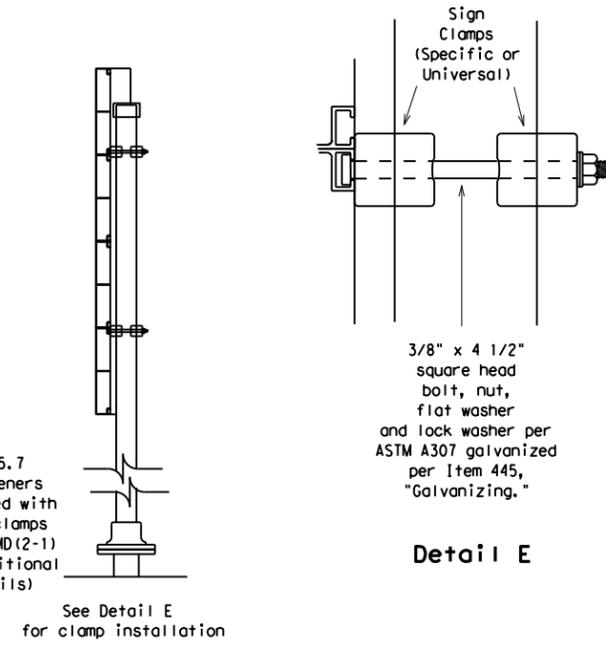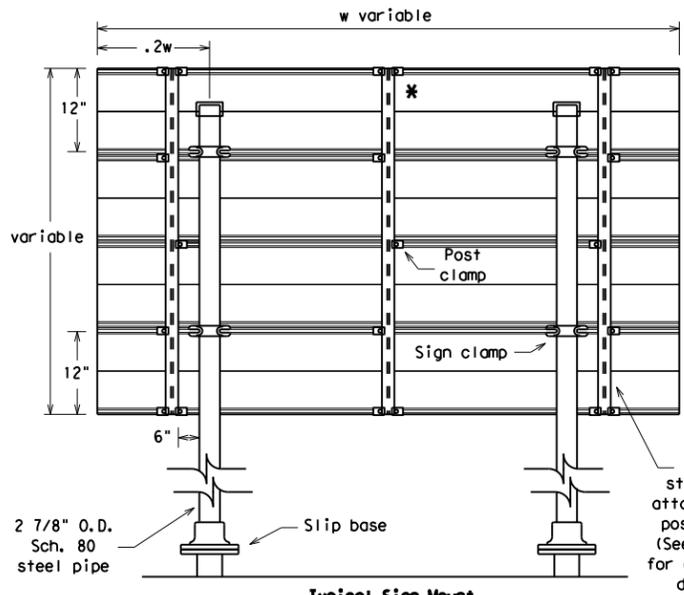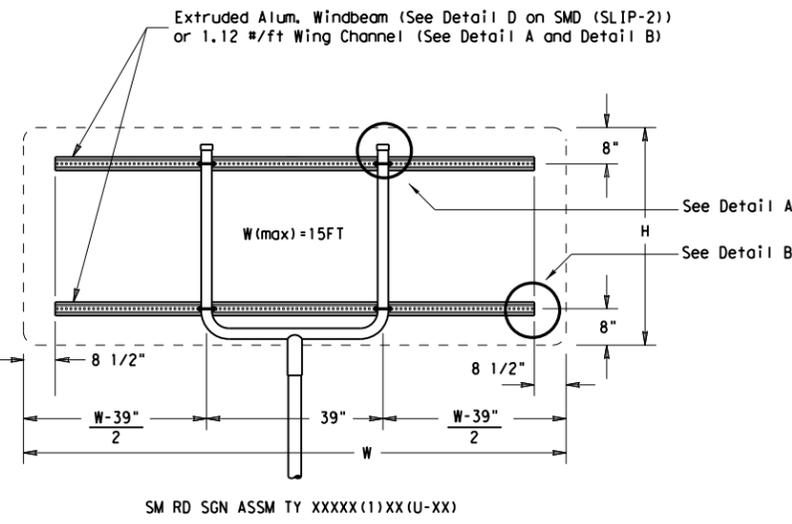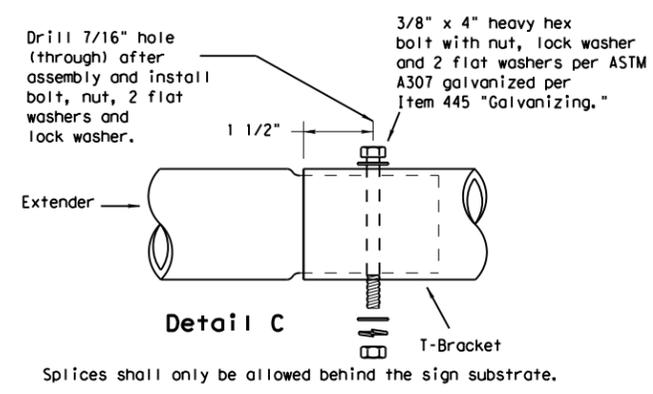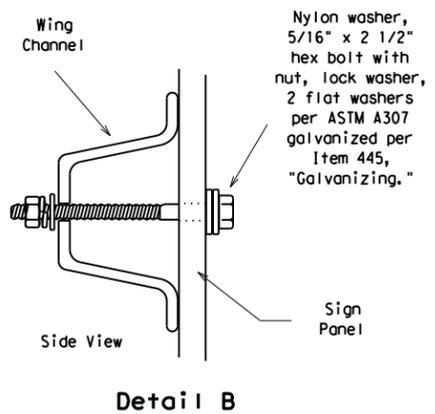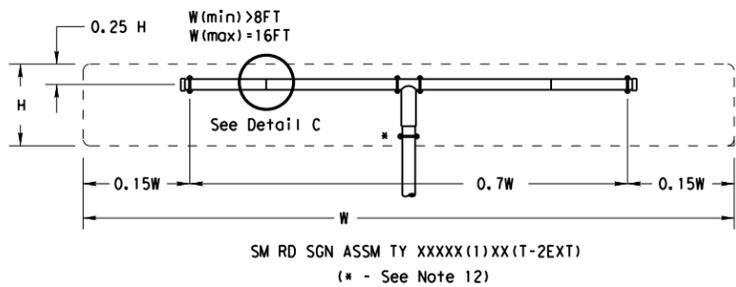

GENERAL NOTES:

- | SIGN SUPPORT | # OF POSTS | MAX. SIGN AREA |
|--------------|------------|----------------|
| 10 BWG | 1 | 16 SF |
| 10 BWG | 2 | 32 SF |
| Sch 80 | 1 | 32 SF |
| Sch 80 | 2 | 64 SF |
- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Sign blanks shall be the sizes and shapes shown on the plans.
- Additional sign clamp required on the "T-bracket" post for 24 inch high signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.


REQUIRED SUPPORT		
	SIGN DESCRIPTION	SUPPORT
Regulatory	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
Warning	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
	48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)
	Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)




**SIGN MOUNTING DETAILS
SMALL ROADSIDE SIGNS
TRIANGULAR SLIPBASE SYSTEM
SMD (SLIP-3) - 08**

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		1392	01	044	FM1378
		DIST	COUNTY		SHEET NO.
		DAL	COLLIN		309


Dallas District Standard for Two-Lane Highway Curve Signing/Markings

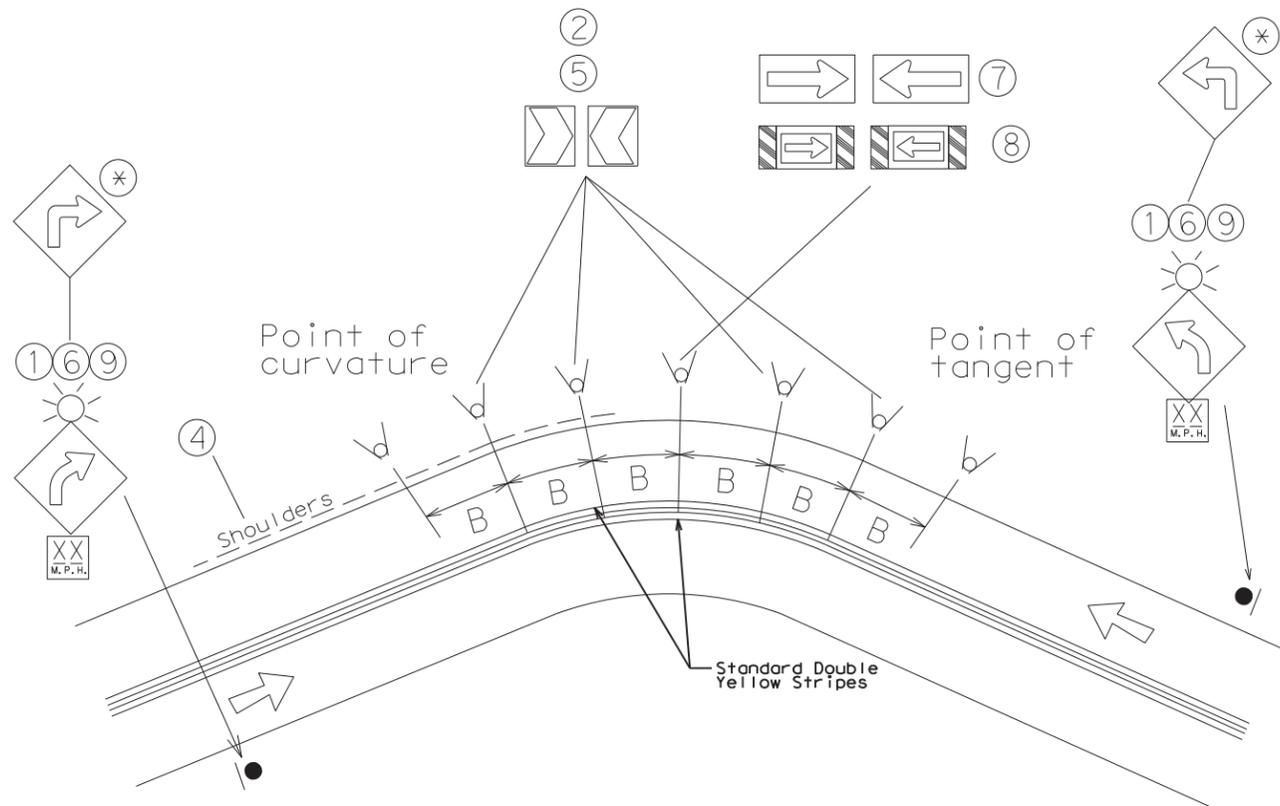

Typical Curve Treatment with Intersection

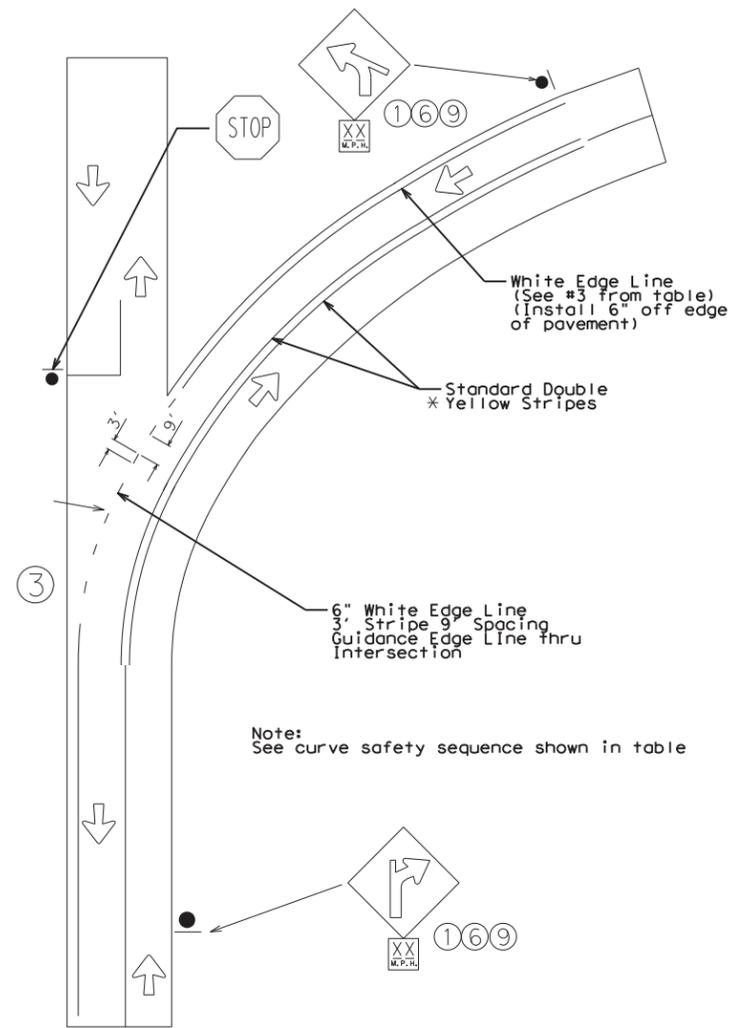

Typical Reverse Curve Edge Line Treatment

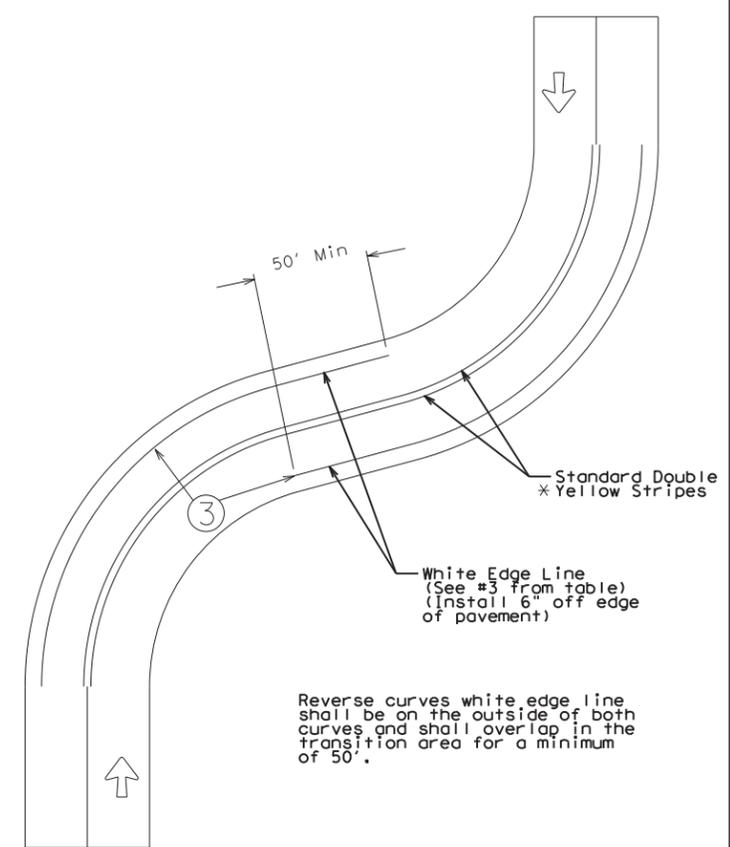

Curve Safety Sequence

Applicable Minimum Measures			Curve signing, delineation and pavement markings (listed in order from minimum to maximum level of treatment as needed)
Advisory Speed 55 mph or higher	Advisory Speed 40-50 mph	Advisory speed 35 mph or less	
+	+	+	1 Advance warning (36" x 36") and advisory mph (18" x 18")
+	+	+	2 Chevron alignment signs if advisory speed is 15 mph or greater than posted speed
	+	+	3 Edge lines
			3a Pavement width 24' or greater 6" solid white edge line
			3b Pavement width 20' - 24' 4" solid white edge line
			3c Pavement width 20' or less no edge line
			Supplemental Measures
		#	4 Add shoulders and edge line (see #3a)
		#	5 Yellow high intensity fluorescent chevron alignment signs - add reflective sheeting to sign support from bottom edge of sign
#	#	#	6 Large advance warning (48" x 48") and advisory mph (30" x 30")
#	#	#	7 Arrow sign (48" x 24")
		#	8 Large arrow sign with diagonals (96" x 36")
		#	9 Add flashers to advance warning signs
#	#	#	10 Surface treatment to improve friction
		**	** The W1-1R or L sign shall only be used when the advisory speed is 30 mph or less

* Standard Double Yellow Stripes shall be dropped through a non-signalized intersection within the city limit. Outside the city limit, the Standard Double Yellow Strip shall be carried through all non-signalized intersections.

+ = required
= optional

Applications 4 - 10 are additional supplemental applications which may be added as directed by the Area Engineer.

Note:
"B" - Chevron Spacing referenced from D&OM(3)-15B

Notes:

- Two methods will be used to determine the appropriate advisory speed for curves, the GPS Method (existing curves) and the Design Method (new curves).
- Notify the Traffic Engineering Section for all requests on advisory speeds for existing curves.

OCT-2014
UPDATED NOTES
JAN-2016
NOTE ADDED
SEPT-2016
NOTE ADDED
FOR STRIPING
IN CURVE
MAR-2017
REMOVED
REFERENCE
TO DELINEATORS
MAY-2019
MODIFIED
SIGN SIZE

Texas Department of Transportation
© 2013

TWO-LANE HIGHWAY CURVE SIGNING & MARKINGS

DALLAS DISTRICT STANDARD

SCALE: NTS SHEET 1 OF 1

DESIGN/CK BLS	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. SEE TITLE SHEET		HIGHWAY NO. FM 1378, ETC.
CHECK BLS	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK FRC	TEXAS	DALLAS	VARIOUS	310
CHECK ARO	CONTROL	SECTION	JOB	
	1392	01	044, ETC.	

DATE: 1/12/2022 11:09:00 AM
 FILE: c:\txdot\pw_online\txdot5\matthew.norris\0483316\dom1-20.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS					DELINEATORS				D & OM DESCRIPTIVE CODES		
DEVICE	SIZE 1	SIZE 2	SIZE 3	SIZE 4	SINGLE		DOUBLE		INSTL DEL ASSM (D-XX)SZ X (XXXX)XXX (XX)		
										NUMBER OF REFLECTORS S = Single D = Double COLOR OF REFLECTORS W = White Y = Yellow R = Red REFLECTOR UNIT SIZE 1 or 2 TYPE OF POST OR DELINEATOR WC = Wing Channel Post YFLX = Yellow Flexible Post WFLX = White Flexible Post BRF = Barrier Reflector TYPE OF MOUNT GND = Embedded (drivable or set in concrete) CTB = Concrete Barrier Mount GF1 or GF2 = Guard Fence Attachment SRF = Surface Mount	
SHEETING	Yellow, White or Red Type B or C reflective sheeting				SHEETING	Yellow, White or Red Type B or C Reflective Sheeting				DIRECTION If Required BI = Bi-Directional BR = Bi-Directional with red on back	
NOTE	1. Size 1 and 4 - Direct applied reflective sheeting for use on flexible post (flx). 2. Size 2 and 3 - For use on wing channel (wc) post only. Use approved metal, plastic or fiberglass backplate with 17/64" mounting holes.				POST TYPE	WC	YFLX, WFLX	WC	YFLX, WFLX	INSTL OM ASSM (OM-XX) (XXXX)XXX (XX)	
MOUNT TYPE					MOUNT TYPE	GND	GND, SRF	GND	GND, SRF	TYPE OF OBJECT MARKER 1, 2, 3, or 4 NUMBER OF REFLECTORS OR DIRECTION X = 3-Size 2 reflector unit (Type 2 only) Y = 1-Size 3 reflector unit (Type 2 only) Z = 3-Size 1 or 1-Size 4 reflector unit(s) (Type 2 only) L = Left Side (Type 3 Object Marker only) R = Right Side (Type 3 Object Marker only) C = Center (Type 3 Object Marker only) TYPE OF POST WC = Wing Channel Post WFLX = White Flexible Post TWT = Thin Walled Tubing TYPE OF MOUNT GND = Embedded (drivable) SRF = Surface Mount WAS = Wedge Anchor Steel WAP = Wedge Anchor Plastic DIRECTION If Required BI = Bi-Directional	

OBJECT MARKERS										
DEVICE	Type 1 (OM-1)		Type 2 (OM-2)			Type 3 (OM-3)			Type 4 (OM-4)	
	OM-1	OM-2X	OM-2Y	OM-2Z	OM-3L	OM-3R	OM-3C	OM-4		
SHEETING	Yellow-Type B _{FL} or C _{FL} Sheeting		Yellow - Type B or C Sheeting			Alternating acrylic black and retroreflective yellow - Type B _{FL} or C _{FL} Sheeting			Red -Type B _{FL} or C _{FL} Sheeting	
POST TYPE	TWT		WC	WC	WFLX	TWT			TWT	
MOUNT TYPE	WAS, WAP		GND	GND	GND, SRF	WAS, WAP			WAS, WAP	

BARRIER REFLECTORS (BRF)			CHEVRONS				ONE DIRECTION LARGE ARROW		NOTE:		
DEVICE	GF1	GF2	CTB	W1-8				W1-6		Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.	
NOTE	1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			SIZE (W x L)	18"x 24" (Conventional)	24"x 30" (Conventional Oversize)	30"x 36" (Expressway)	36" x 48" (Freeway)	SIZE (W x L)	48" x 24" (Conventional)	60" x 30" (Expressway & Freeway)
SHEETING	Yellow, White, Red			MOUNTING HEIGHT	4'-0" or 7'-0"		7'-0" Only		MOUNTING HEIGHT	7'-0"	
NOTE	1. Reflective sheeting shall have a minimum dimension of 3 inches and minimum surface area of 9 square inches.			NOTE	1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).						

		Traffic Safety Division Standard	
DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION D & OM(1)-20			
FILE: dom1-20.dgn	DN: TXDOT	CK: TXDOT	OW: TXDOT
© TXDOT August 2004	CONT	SECT	JOB
10-09 3-15	1392 01	044, ETC.FM 1378, ETC.	
4-10 7-20	DIST	COUNTY	SHEET NO.
	DAL	COLLIN	311

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/12/2022 11:09:05 AM
 FILE: c:\txdot\pw_online\matthew.norris\dot5\dom2-20.dgn

POST TYPE AND SUPPORT FOUNDATION DETAILS

TYPE OF BARRIER MOUNTS

WING CHANNEL (WC)

FLEXIBLE POSTS (YFLX, WFLX)

WEDGE ANCHOR SYSTEMS

GUARD FENCE ATTACHMENT

GND

GND








SRF

WAS

WAP

GF 1

GF 2

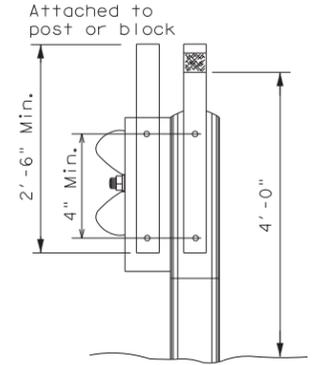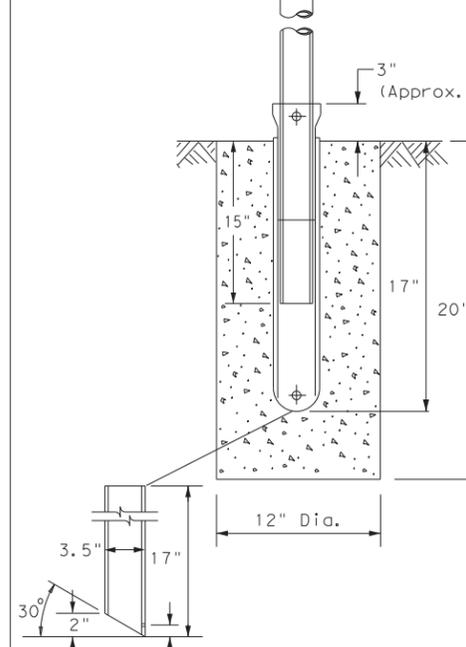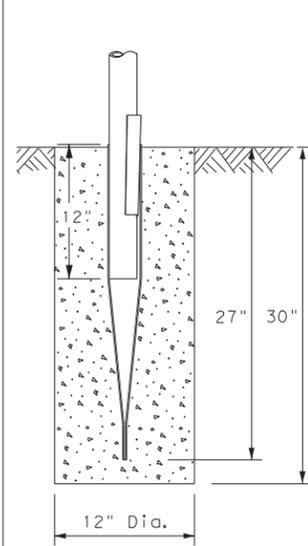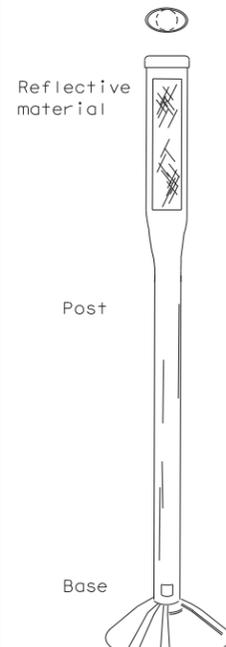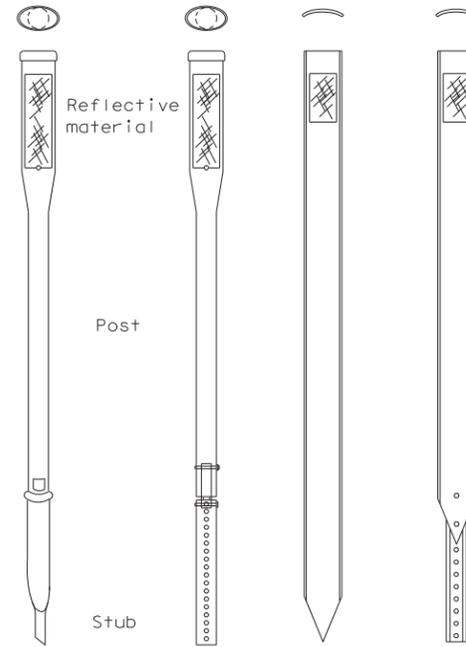

NOTES

1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only.
2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.


NOTES

1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices.
2. Install per manufacturer's recommendations.
3. Post length may vary to meet field conditions.
4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.

NOTE

1. Install per manufacturer's recommendations.

CONCRETE TRAFFIC BARRIER (CTB)

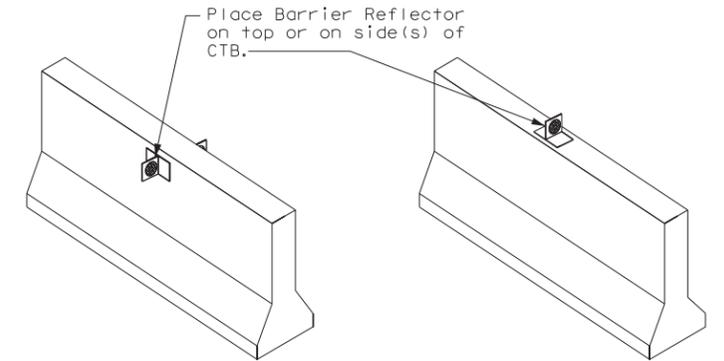


GENERAL NOTES

1. Place delineators on a section of roadway at a consistent distance from the edge of pavement.
2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction.
3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible.
4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation.
5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface.
6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.

TYPES 1,3, AND 4 OBJECT MARKERS AND CHEVRONS


CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN

DELINEATORS AND TYPE 2 OBJECT MARKERS

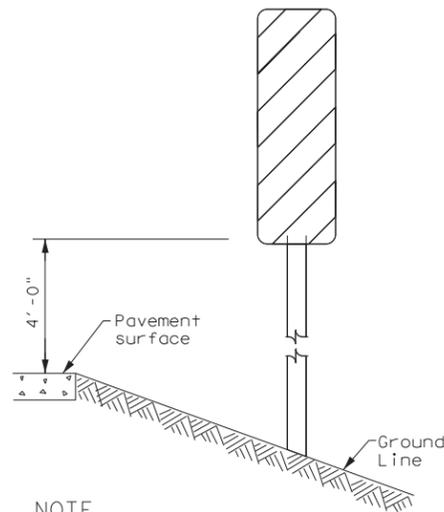


NOTE

Mounting at 4 feet to the bottom of the chevron is permitted for chevrons that will not exceed a height of 6'-6" to the top of the chevron (sizes 24" x 30" and smaller)

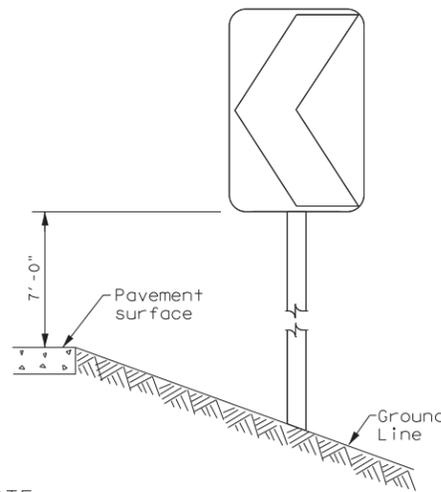

NOTE

Chevrons 30" x 36" and larger shall be mounted at a height of 7' to the bottom of the chevron. Chevron sign and ONE DIRECTION LARGE ARROW sign (W1-9T) shall be installed per SMD standard sheets and paid under item 644.

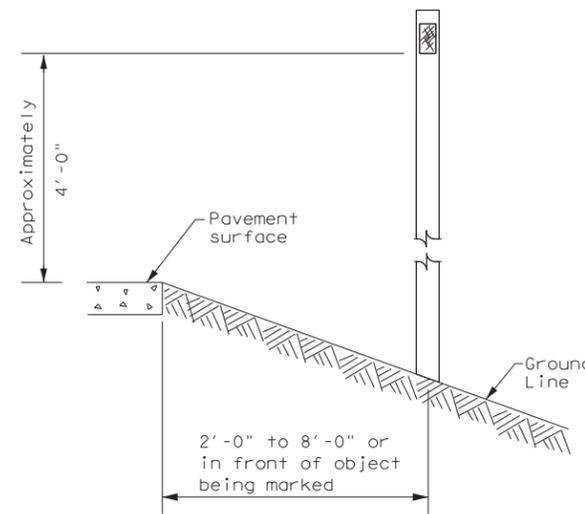

See general notes 1, 2 and 3.

		Traffic Safety Division Standard	
<p>DELINEATOR & OBJECT MARKER INSTALLATION</p> <p>D & OM(2)-20</p>			
FILE: dom2-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT August 2004	CONT	SECT	JOB
10-09 3-15	1392	01	044, ETC.FM 1378, ETC.
4-10 7-20	DIST	COUNTY	SHEET NO.
	DAL	COLLIN	312


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 1/12/2022 11:09:12 AM
 FILE: c:\txdot\pw_online\matthew.norris\0483316\dom3-20.dgn

MINIMUM WARNING DEVICES AT CURVES WITH ADVISORY SPEEDS

Amount by which Advisory Speed is less than Posted Speed	Curve Advisory Speed	
	Turn (30 MPH or less)	Curve (35 MPH or more)
5 MPH & 10 MPH	● RPMs	● RPMs
15 MPH & 20 MPH	● RPMs and One Direction Large Arrow sign	● RPMs and Chevrons; or ● RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons.
25 MPH & more	● RPMs and Chevrons; or ● RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons	● RPMs and Chevrons


SUGGESTED SPACING FOR DELINEATORS ON HORIZONTAL CURVES

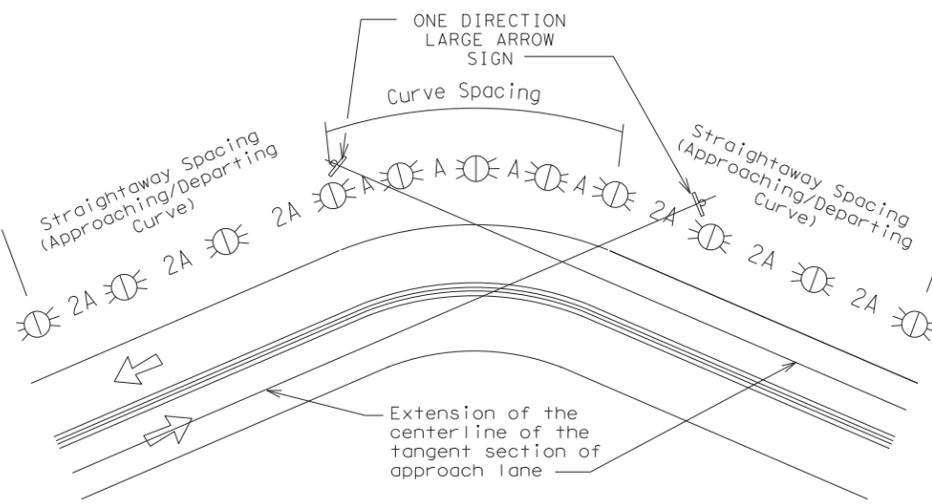

NOTE

ONE DIRECTION LARGE ARROW (W1-6) sign should be located at approximately and perpendicular to the extension of the centerline of the tangent section of approach lane.

SUGGESTED SPACING FOR CHEVRONS ON HORIZONTAL CURVES

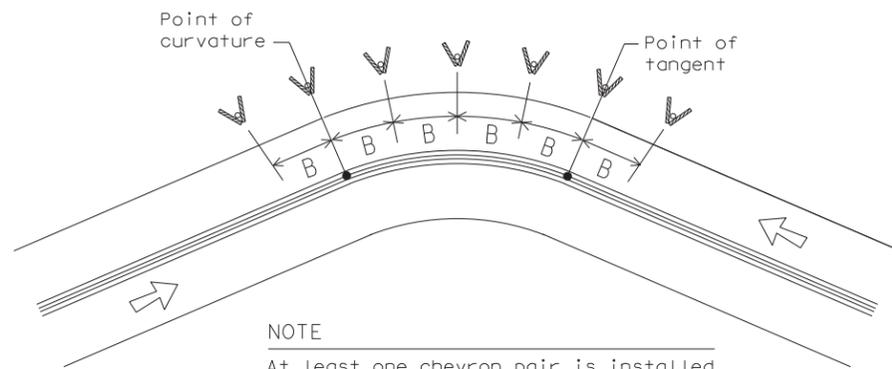

NOTE

At least one chevron pair is installed beyond the point of tangent in tangent section.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS KNOWN				
Degree of Curve	FEET			
	Radius of Curve	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
		A	2A	B
1	5730	225	450	—
2	2865	160	320	—
3	1910	130	260	200
4	1433	110	220	160
5	1146	100	200	160
6	955	90	180	160
7	819	85	170	160
8	716	75	150	160
9	637	75	150	120
10	573	70	140	120
11	521	65	130	120
12	478	60	120	120
13	441	60	120	120
14	409	55	110	80
15	382	55	110	80
16	358	55	110	80
19	302	50	100	80
23	249	40	80	80
29	198	35	70	40
38	151	30	60	40
57	101	20	40	40

Curve delineator approach and departure spacing should include 3 delineators spaced at 2A. This spacing should be used during design preparation or when the degree of curve is known.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS NOT KNOWN			
Advisory Speed (MPH)	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
	A	2xA	B
65	130	260	200
60	110	220	160
55	100	200	160
50	85	170	160
45	75	150	120
40	70	140	120
35	60	120	120
30	55	110	80
25	50	100	80
20	40	80	80
15	35	70	40

If the degree of curve is not known, delineator spacing may be determined based on the Advisory Speed of the curve. Use the delineator curve spacing for each Advisory Speed (MPH).

DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
Frwy./Exp. Tangent	RPMs	See PM-series and FPM-series standard sheets
Frwy./Exp. Curve	Single delineators on right side	See delineator spacing table
Frwy/Exp. Ramp	Single delineators on at least one side of ramp (should be on outside of curves) (see Detail 3 on D&OM(4))	100 feet on ramp tangents Use delineator spacing table for ramp curves ("straightway spacing" does not apply to ramp curves)
Acceleration/Deceleration Lane	Double delineators (see Detail 3 on D&OM(4))	100 feet (See Detail 3 on D & OM (4))
Truck Escape Ramp	Single red delineators on both sides	50 feet
Bridge Rail (steel or concrete) and Metal Beam Guard Fence	Bi-Directional Delineators when undivided with one lane each direction Single Delineators when multiple lanes each direction	Equal spacing (100' max) but not less than 3 delineators
Concrete Traffic Barrier (CTB) or Steel Traffic Barrier	Barrier reflectors matching the color of the edge line	Equal spacing 100' max
Cable Barrier	Reflectors matching the color of the edge line	Every 5th cable barrier post (up to 100' max)
Guard Rail Terminus/Impact Head	Divided highway - Object marker on approach end Undivided 2-lane highways - Object marker on approach and departure end	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5) and D & OM (6)
Bridges with no Approach Rail	Type 3 Object Marker (OM-3) at end of rail and 3 single delineators approaching rail	See D & OM(5)
Reduced Width Approaches to Bridge Rail	Type 2 and Type 3 Object Markers (OM-3) and 3 single delineators approaching bridge	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5)
Culverts without MBGF	Type 2 Object Markers	See Detail 2 on D & OM(4)
Crossovers	Double yellow delineators and RPMs	See Detail 1 on D & OM (4)
Pavement Narrowing (lane merge) on Freeways/Expressway	Single delineators adjacent to affected lane for full length of transition	100 feet

NOTES

- Unless indicated otherwise, the delineator or barrier reflector color shall conform to the color of the pavement edge line on the side of the road where the delineators or barrier reflectors are placed.
- Barrier reflectors may be used to replace required delineators.
- Single red delineators may be mounted on the back side of delineator posts for wrong way driver applications

LEGEND	
	Bi-directional Delineator
	Delineator
	Sign

Texas Department of Transportation
Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER PLACEMENT DETAILS


D & OM(3) - 20

FILE: dom3-20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CR: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS		1392 01	044, ETC. FM 1378, ETC.	
3-15 8-15	DIST	COUNTY	SHEET NO.	
8-15 7-20	DAL	COLLIN	313	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 1/12/2022 11:09:18 AM
 FILE: c:\txdot\pw_online\txdot5\matthew.norris\0483316\dom4-20.dgn

CROSSOVERS

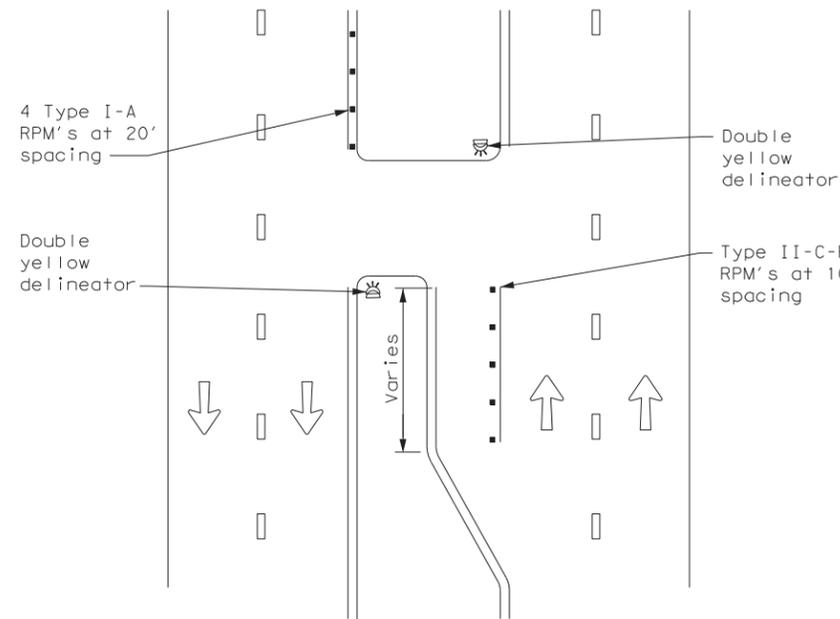


DETAIL 1

FOR CULVERTS WITHOUT MBGF

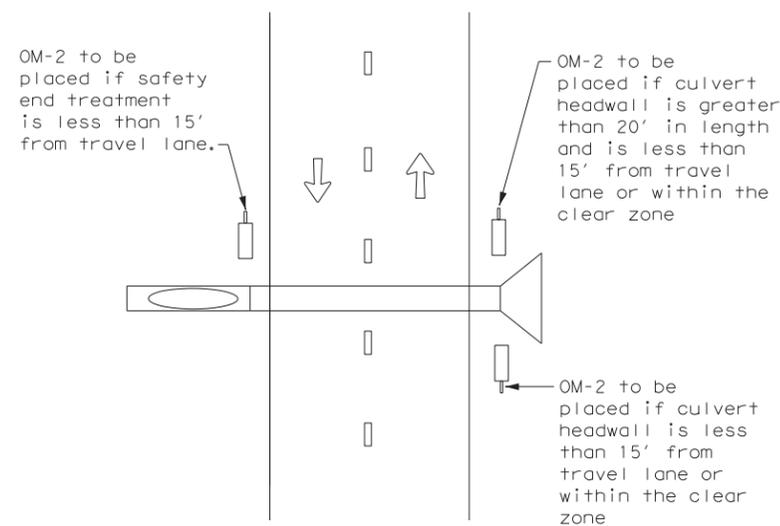


DETAIL 2

FREEWAY DELINEATION FOR RAMPS AND ACCELERATION/DECELERATION LANES

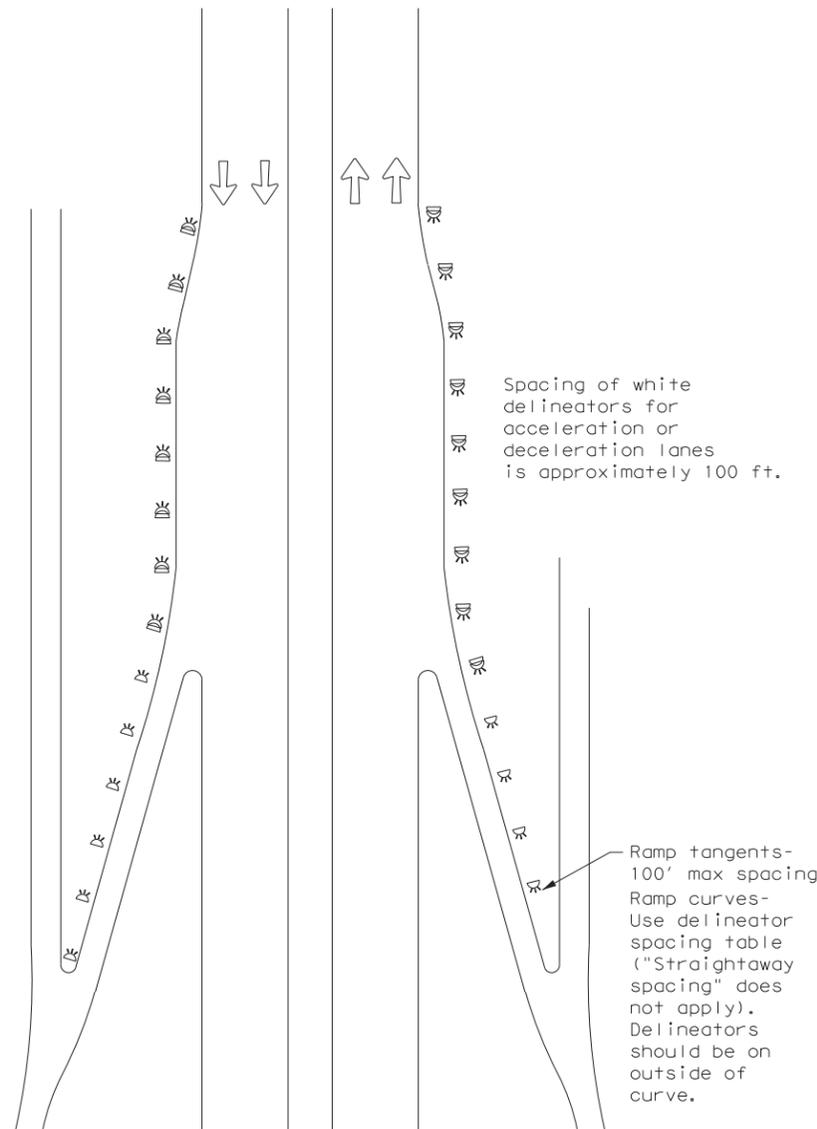


DETAIL 3

TYPICAL APPLICATION OF DEAD END BARRICADE

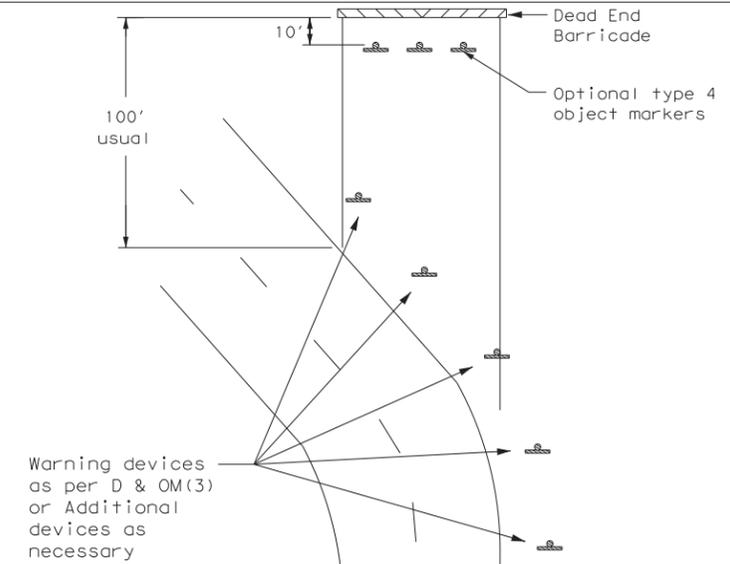

DETAIL 4

TYPICAL DEAD END BARRICADE INSTALLATION

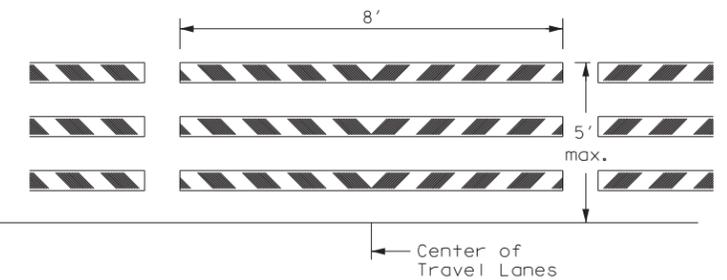

NOTES

- Barricade striping shall be red and white reflective sheeting for all permanent road closures.
- Barricade striping is red and white sloping toward the center of the roadway.
- Type 3 Barricade Supports should be anchored to soil or pavement as described in compliant Work Zone Traffic Control Devices List, section D.2.f and D.2.g.

DETAIL 5

LEGEND	
	Bidirectional Delineator
	Delineator
	OM-3
	Barricade
	Sign
	OM-2
	Double Delineator




DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(4) - 20

FILE: dom4-20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CR: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS		1392	01	044, ETC.FM 1378, ETC.
3-15	DIST	COUNTY	SHEET NO.	
7-20	DAL	COLLIN	314	


**TWO-WAY, TWO LANE ROADWAY
WITH REDUCED WIDTH APPROACH RAIL**

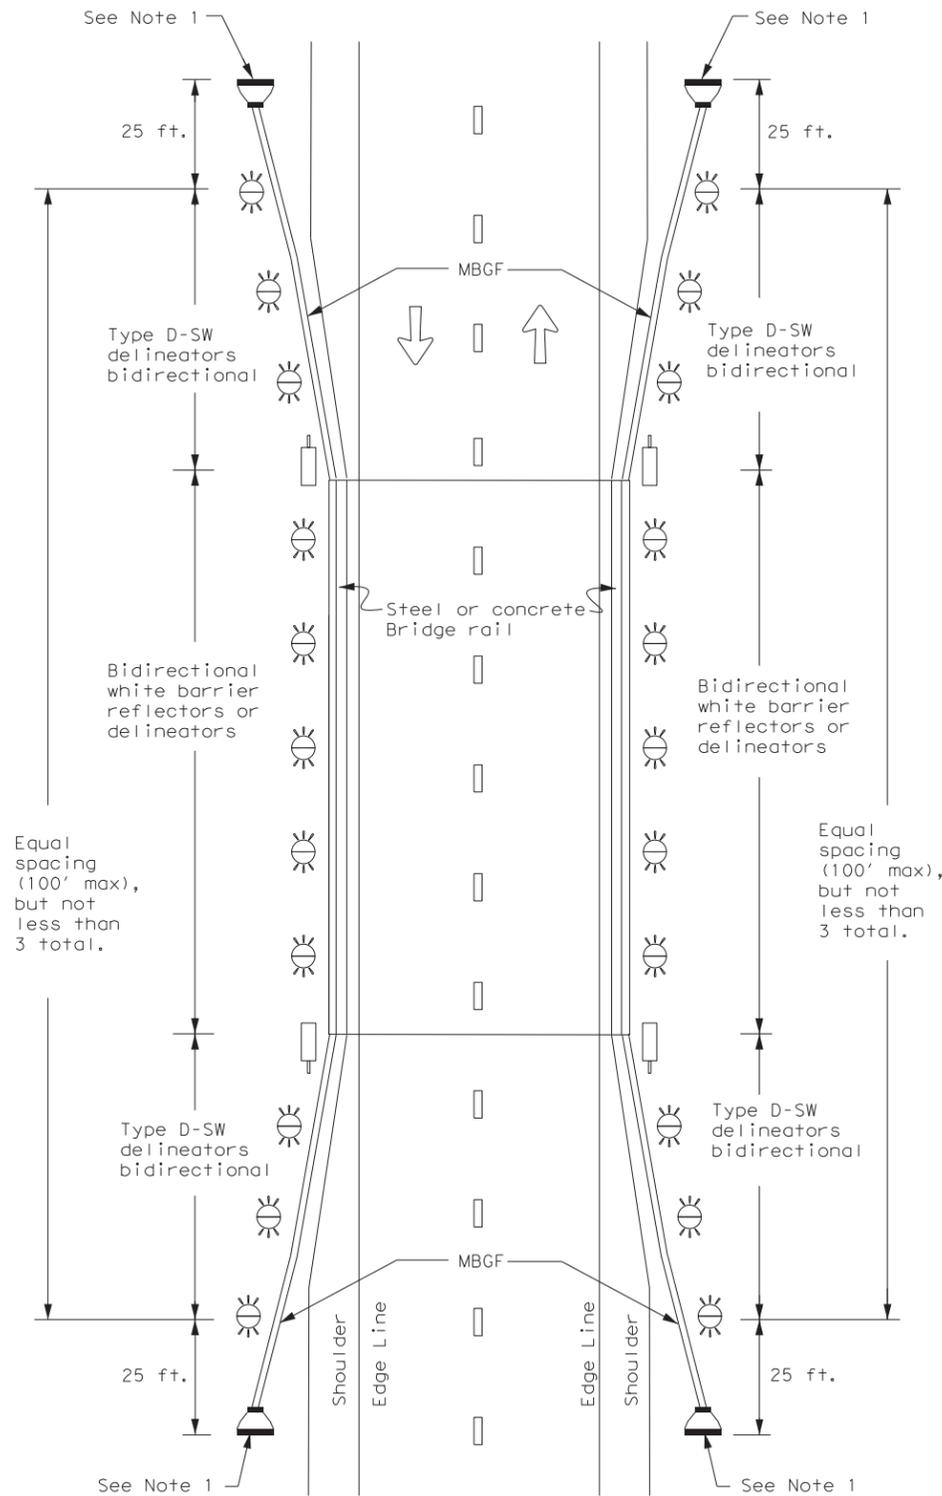

NOTE:

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.


**TWO-WAY, TWO LANE ROADWAY
WITH METAL BEAM GUARD FENCE (MBGF)**

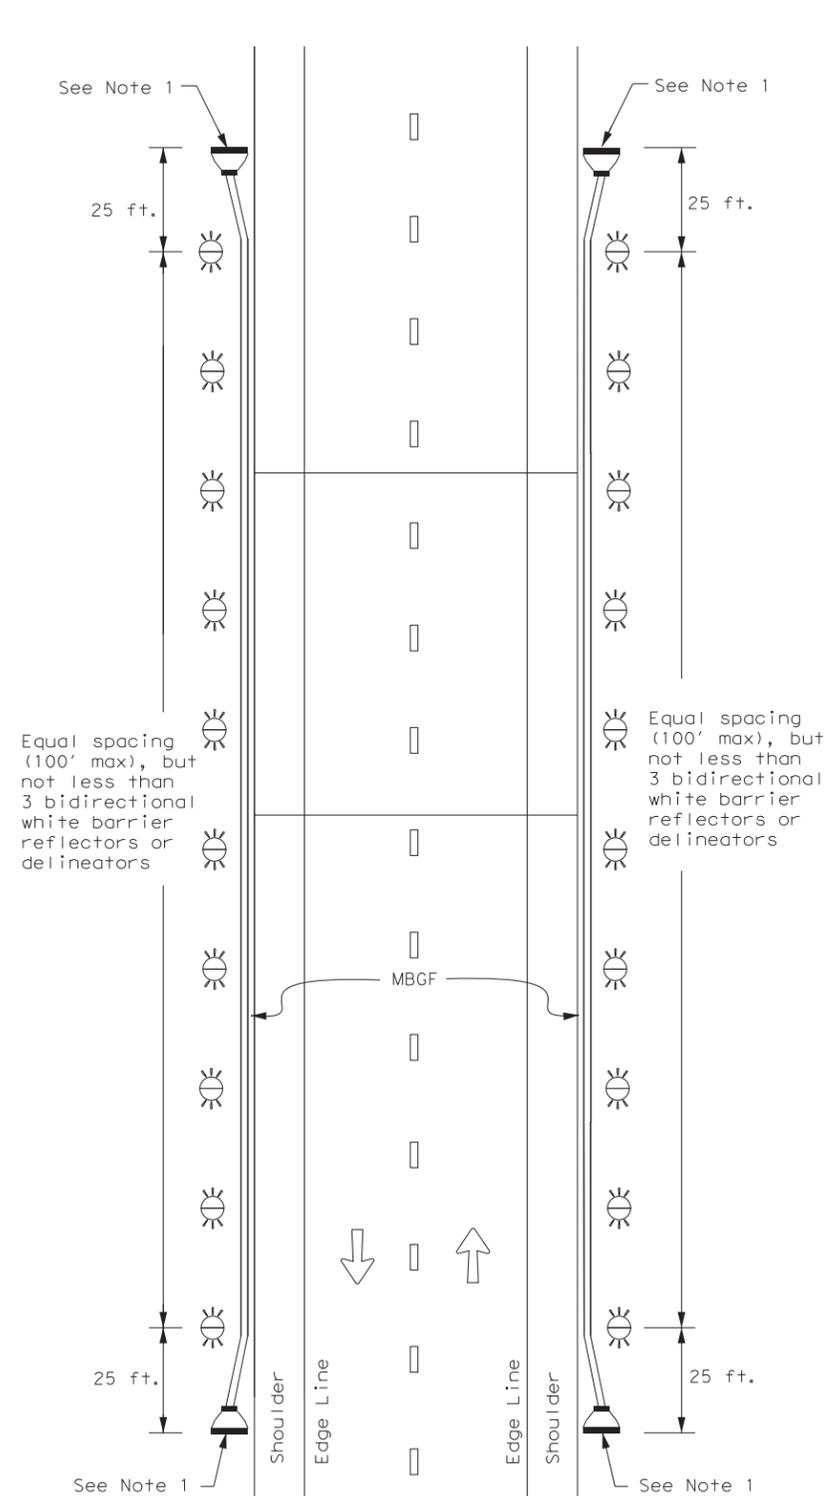

NOTE:

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

**TWO-WAY, TWO LANE ROADWAY
BRIDGE WITH NO APPROACH RAIL**

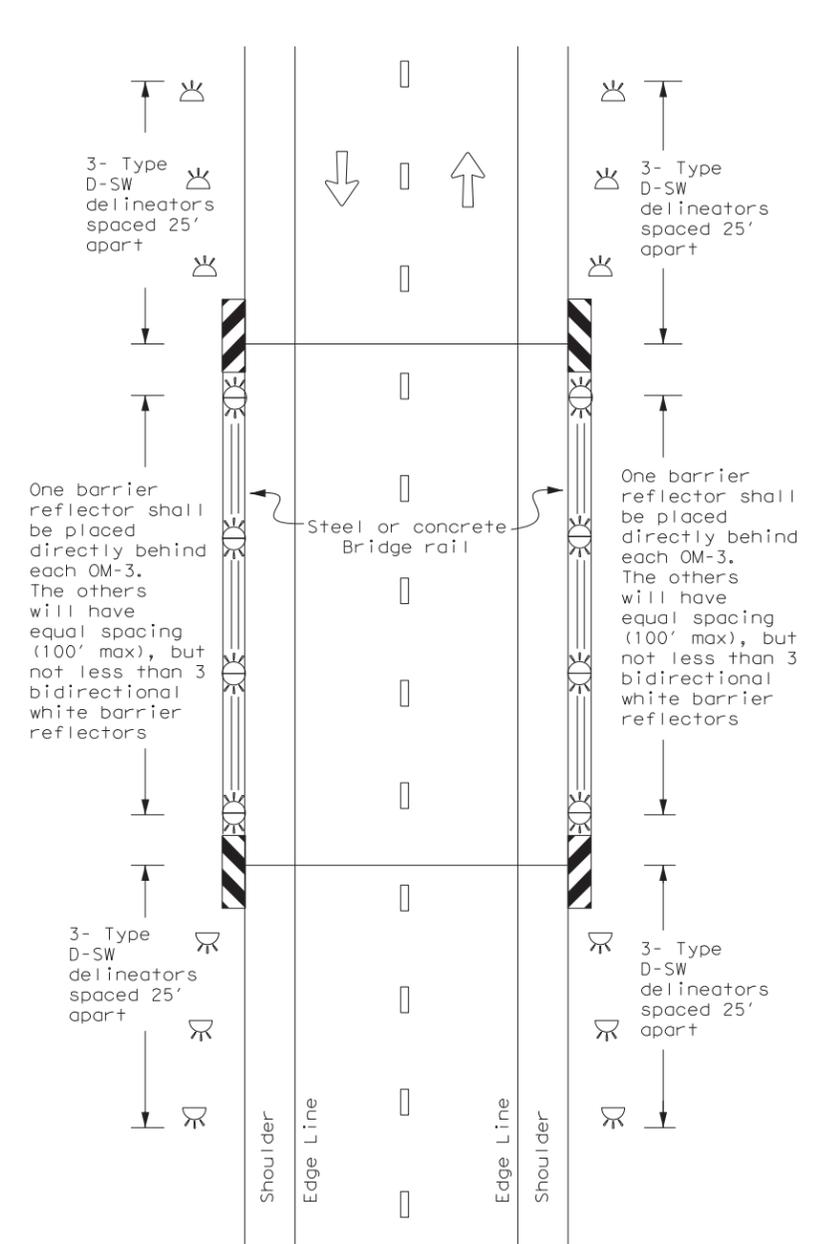

LEGEND

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow

Texas Department of Transportation
Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(5) - 20


FILE: dom5-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT August 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	1392	01	044, ETC.FM 1378, ETC.	
7-20	DIST	COUNTY	SHEET NO.	
	DAL	COLLIN	315	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 1/12/2022 11:09:23 AM
FILE: c:\txdot\pw_online\matthew.norris\0483316\dom5-20.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 2/28/2023 8:59:24 AM
 FILE: c:\txdot\pw_online\txdot5\ibrahim.eisaad\0483316\pml-22.dgn

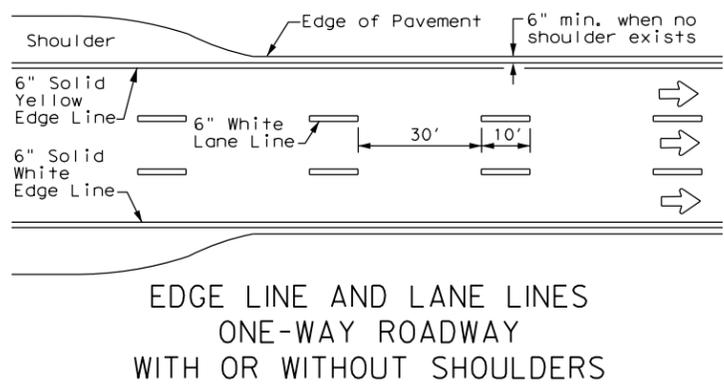


EDGE LINE AND LANE LINES
 ONE-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS

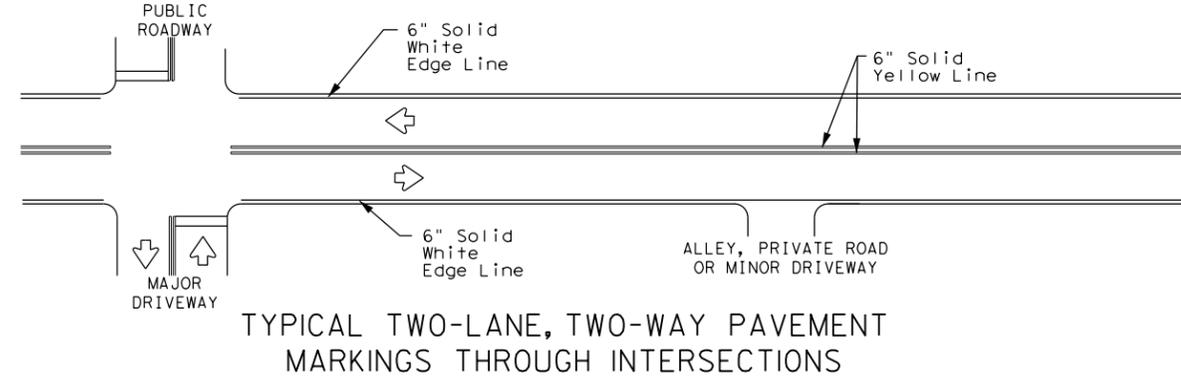

TYPICAL TWO-LANE, TWO-WAY PAVEMENT
 MARKINGS THROUGH INTERSECTIONS

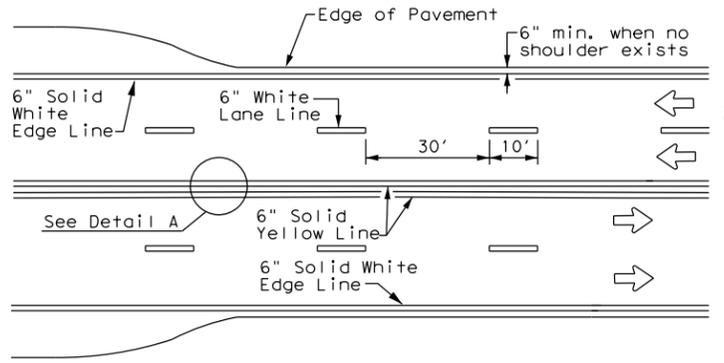


CENTERLINE AND LANE LINES
 FOUR LANE TWO-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS

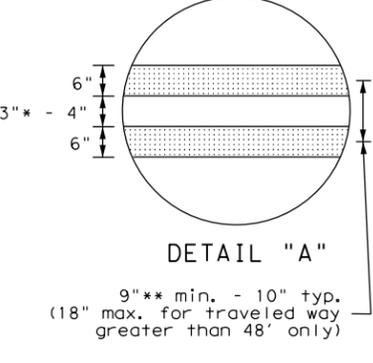


DETAIL "A"
 9" min. - 10" typ.
 (18" max. for traveled way
 greater than 48' only)


* 2" minimum for restripe projects when approved by the Engineer.
 ** 8" minimum for restripe projects when approved by the Engineer.

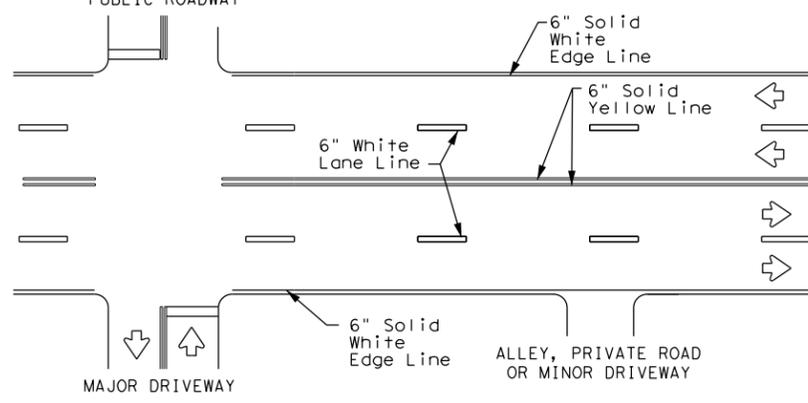

TYPICAL MULTI-LANE, TWO-WAY PAVEMENT
 MARKINGS THROUGH INTERSECTIONS

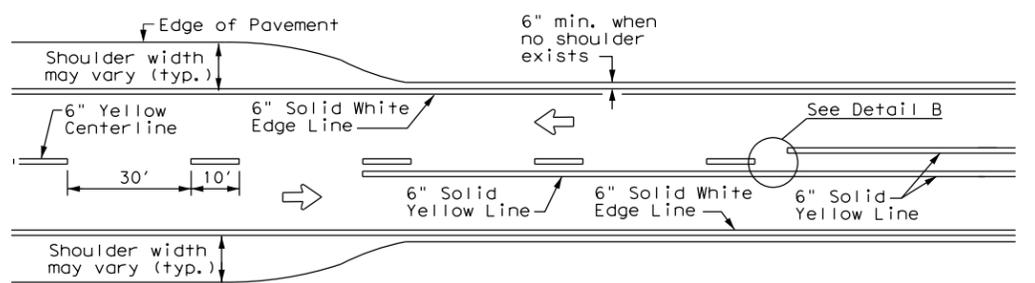


TWO LANE TWO-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS




DETAIL "B"

* 2" minimum for restripe projects when approved by the Engineer.




YIELD LINES

For posted speed on road being marked equal to or greater than 45 MPH.

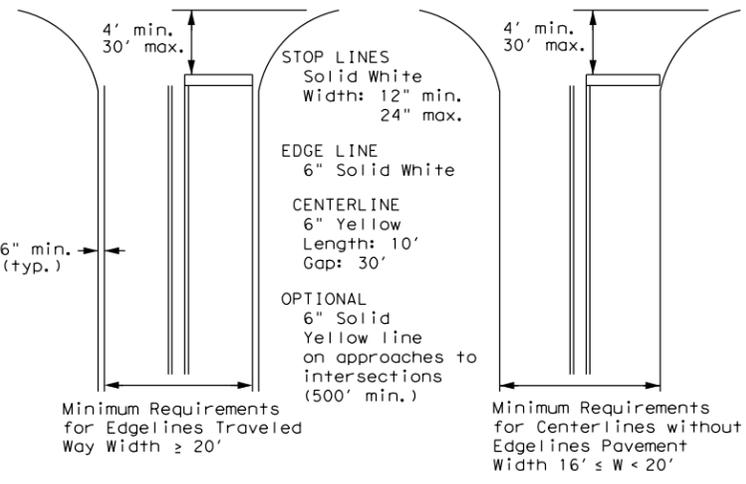

NOTE: Traveled way is exclusive of shoulder widths. Refer to General Note 2 for additional details.

GUIDE FOR PLACEMENT OF STOP LINES,
 EDGE LINE & CENTERLINE
 Based on Traveled Way and Pavement Widths for Undivided Roadways

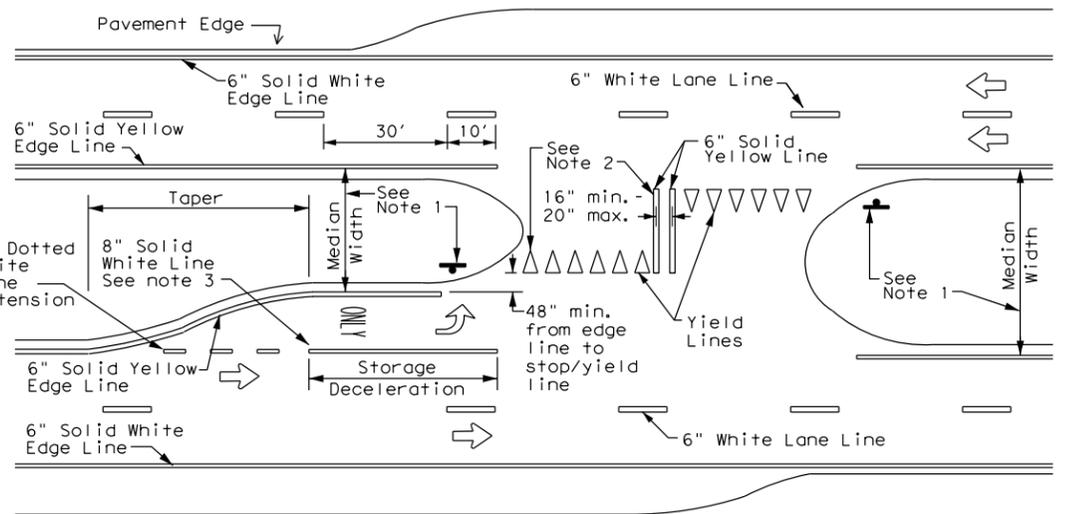

FOUR LANE DIVIDED ROADWAY CROSSOVERS

NOTES

- Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs and stop bars are optional as determined by the Engineer.
- Install median striping (double yellow centerlines and stop lines/yield lines) when a 50' or greater median centerline can be placed. Stop lines shall only be used with stop signs. Yield lines shall only be used with yield signs.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

GENERAL NOTES

- Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edge lines are not required in curb and gutter sections of roadways.
- The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the center of edge line to the center of edge line of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.



TYPICAL STANDARD
 PAVEMENT MARKINGS

PM(1) - 22

FILE:	pml-22.dgn	DN:		CK:		DW:		CK:	
© TxDOT	December 2022	CONT	SECT	JOB	HIGHWAY				
11-78	8-00	6-20	1392	01	044, ETC.	FM	1378, ETC.		
8-95	3-03	12-22	DIST	COUNTY	SHEET NO.				
5-00	2-12		DAL	COLLIN	317				