



40W UGR17 Recessed linear with diffuser, ideal for offices.

Complete with 1000mA driver , 4pcs fixing clips, 4pcs connectors & 2pcs end cups.

Can be connected in line


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

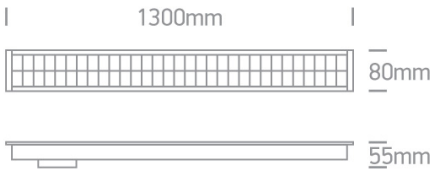

Gallery



Physical Specification

Item Group	12 Office & Kitchen
Family	Recessed LED Linear Profiles
Order Code	38150BR/W/C
Colour	White
Material	Aluminium
Diffuser Material	Plastic
Shape	Rectangular

Length	1300mm
Width	80mm
Height	55mm
Cutout Hole Width	1280mm
Cutout Hole Length	68mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	36V
Power(Watts)	36W
IP Rating	IP20
Light Source	LED built in

LED Type
LED Brand
LED Number

SMD 3030
Osram
96

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
1000mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Led Driver
220-240V
Yes
Yes
30-42W
0,95
Yes
30-42V
IP20

No
Metal
Connector
ATG

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram
Dark Light
UGR

4000K
4000lm
100lm/W
90
34°

Yes
17

Packing Info

Pcs/Carton	12
Barcode	5291889063834
HS Code	9405409900

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes