



Double
Infrared Mode




0-299
Sensitivity Level



20 min Quick
Assemble & Disassemble



4 Digit
Password Protected



Digital Circuit
Design, anti Interface



Completely
Harmless to
Humans



33 ZONE DFMD

TW-D2333

- Double infrared detector, digital circuit design, anti-interference.
- Detects in 33 zones.
- Adjustable sensitivity can be adjusted from 0 to 99 as per the required inferences such as the adjustment to avoid the coins, keys, buckle, etc.
- The function of statistics: show the number of passed examinees and the alarm times.
- Easy to operate: the operation panel is covered by thin plastic, Bright light alarm can be shown in the warning zones directly and find the precise position of the target metal.
- Both light and auditory alarms can make the warning clear, and improves work efficiency.
- No harm to people: The gate is harmless to people with cardiac pacemakers, pregnant women, tapes, videotapes, etc.
- Convenient installation: Integrated design, you can assemble or disassemble it in 20 minutes with the operation instruction.



(+91)-11-41916615
+91-95999-53923



D-162, Okhla Industrial Area
Phase I, New Delhi, 110020



sales@timewatchindia.com
www.timewatchindia.com


Specification

General Specification	
Outer Frame	2220mm(H) x820mm(W)x500mm(D)
Inner Frame	2000mm(H)x700mm(W)x500mm(D)
Electrical Current	AC100V~240V 50/60Hz
Power	10W
	90KG
Signal Frequency	7000-8999Hz(adjustable)
Work Environment	-20C to +45C
Sensitivity Adjustable	Level 0-299
Alarm	Sound and light
Max Distance	0.3m at low sensitivity; 0.5m at high sensitivity
Configuration	
Master Control Board	Metal-detect-door-main bd, REV120
Digital Keypad	A&C door panel board, REV030
Digital Display Location Board	A&C door zone board, REV030
Speaker	Loudspeaker, 8 2W, Black, 75mmx32mmx27mm
Software	
Operation Way	Remote control only
Sensibility	With the highest sensibility, it can detect the metal article as small as the clip. With the sensibility range of 0-100, it can be easily adjusted, pre-set the weight, volume, size and location in respect of the metal Articles and eliminate the false alarming for the coin, key, jewelry, leather belt button, etc.
Infrared Counting	Intelligent counter can calculate the number of Passenger flows and the times of alarm.
Alarm Setting	33 kinds of alarm sound



Detecting Areas	Allocation of thirtythree mutual over-lapping detecting areas, simultaneous alarming from multi-areas and accurately ascertaining the location of the metal articles according to the layout of the metal particles
Operating Environment	
Operation Temperature/Humidity	5 °C-40 °C/0%-90% (non-condensing)
Storage Temperature/Humidity	-20 °C-55 °C/0%-98% (non-condensing)
Operation Power	220V AC(±10%) 50±3Hz (Optional: 100V AC, 110V AC, 120V AC, 200V AC)

Dimensional Drawing

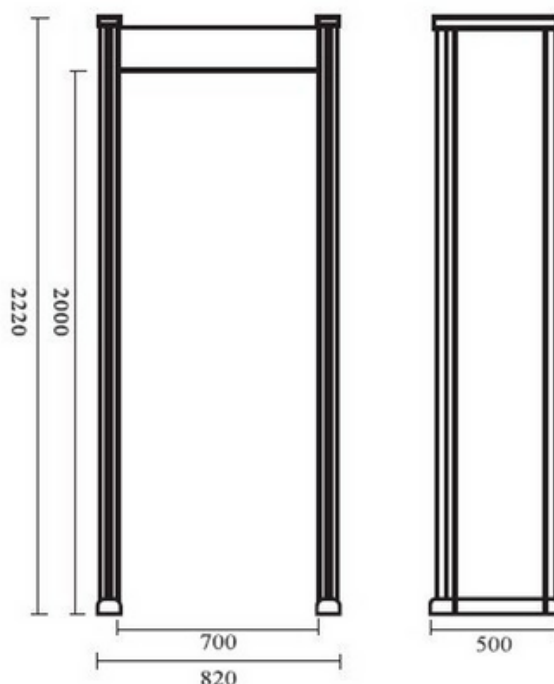

Head Office : D-162, Okhla Industrial Area Phase I,
New Delhi, 110020.



Regional Office : Mumbai, Bengaluru, Ahmedabad,
Chennai, Kolkata.

International Office : Dubai

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.



Phone : +91-95999-53923



Sales : sales@timewatchindia.com



Support : helpdesk@timewatchindia.com

