




10W ceiling to wall corner for 38152R.

Complete with 200mA driver , 4pcs fixing clips, 4pcs connectors & 2pcs end cups.


Complies with standard EN60598-1 and any other specific standards.

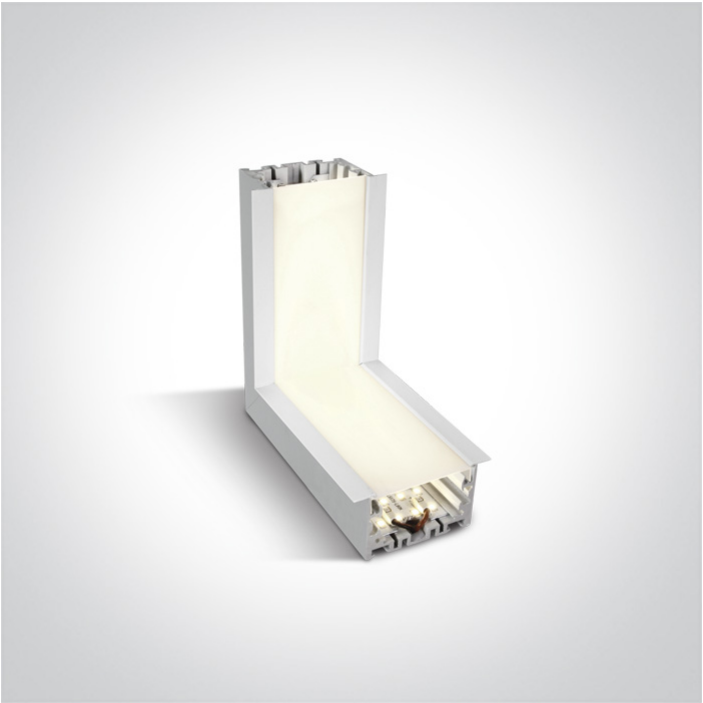

Downloads



Dimensions



Gallery



Physical Specification

Item Group	12 Office & Kitchen
Family	Recessed LED Linear Profiles
Order Code	38152RL/W/C
Colour	White
Material	Aluminium
Diffuser Material	Plastic
Shape	Rectangular

Length	134x134mm
Width	70mm
Height	60mm
Cutout Hole Width	100x100mm
Cutout Hole Length	60mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	10W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	200mA
Voltage	42V
Power(Watts)	8,4W
IP Rating	IP20
Light Source	LED built in

LED Type
LED Brand
LED Number

SMD 2835
Epistar
72

Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
200mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand

Led Driver
220-240V
Yes
Yes
6-8,4W
0,9
Yes
30-42V
IP20

No
Metal
Connector
ATG

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram

4000K
900m
90lm/W
90


Packing Info

Pcs/Carton
Barcode

6
5291889062684

HS Code

9405409900

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes