


21 Industrial & Floodlights>The Supermarket LED Linear Range Aluminium + PC

38236R/C

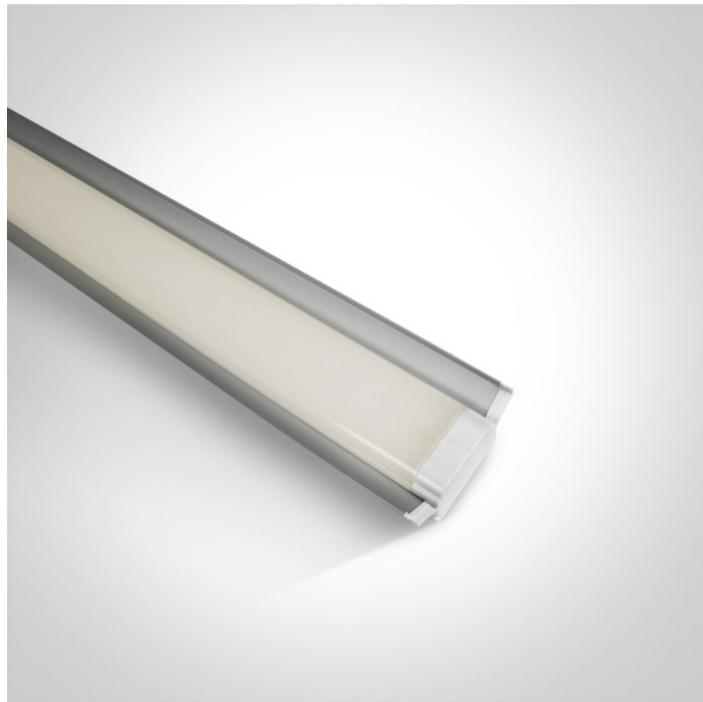

LED linear, ideal for supermarket applications. It can replace fluorescent fittings mounted on cable channels.

Supplied with 100-240V LED driver as standard.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Supermarket LED Linear Range Aluminium + PC
Order Code	38236R/C
Colour	Grey
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	1200mm
Width	105mm
Height	40mm
Surface Ceiling	Yes
Indoor	Yes

Adjustable

No

Electrical Characteristics

Gear

Built In

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

43W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

Cable Length

100cm

F Mark



Fitting

Input Type

Constant Current

Input Current

1120mA

Voltage

38V

Power(Watts)

42W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Hongli

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Power(Watts)

Yes

Power Factor

34-46W

Constant Current

0,9

Output

Yes

Voltage Range

1120mA

IP Rating

30-41V

IP20

Illumination Data

Colour Temperature

4000K

Lumen Output

3800lm

Light Efficiency

88,4m/W

CRI

80

Beam Angle

120°



Packing Info

Box Weight

1,7Kg

Pcs/Carton

10


Barcode

5291889037156

HS Code

9405409900

Energy Label

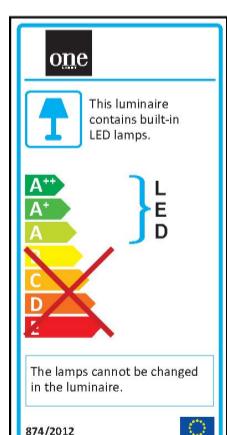

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes