



IP65 LED fitting to replace T8 traditional waterproof fluorescent. Stainless steel clips and suspension included. Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

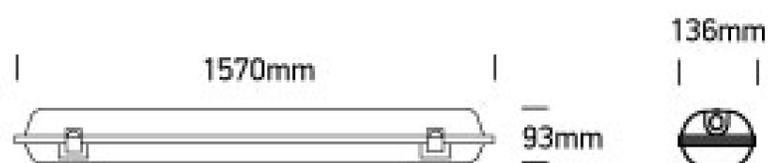

### Physical Specification

Item Group	Special Offers
Family	Industrial & Floodlights
Order Code	38258L/C
Colour	Grey
Material	PC
Diffuser Material	PC
Shape	Rectangular
Length	1570mm
Width	136mm
Height	93mm
Surface Ceiling	Yes
Surface Wall	Yes

Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	6

## Electrical Characteristics

Gear	Built In
------	----------

### Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	58W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	

### Fitting

Input Type	Constant Current
IP Rating	IP65
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	308

### Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes

60 Hz	Yes
Power(Watts)	58W
Power Factor	0,9
Constant Current	Yes
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Lifud


#### Illumination Data

Colour Temperature	4000K
Lumen Output	5000lm
Light Efficiency	86,2lm/W
CRI	80
Illumination Diagram	

#### Packing Info

Box Weight	3,02Kg
Pcs/Carton	6
Barcode	5291889046028
HS Code	9405104090

#### Energy Label

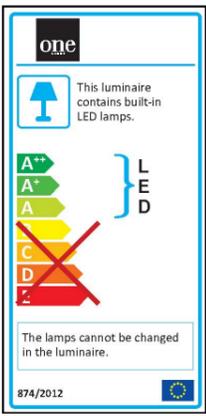

## Certification & Warranty

Warranty

2 Years

Weee Directive

Yes