


06 Downlights Fixed LED>The SMD Dark Light Range

50122D/W/W

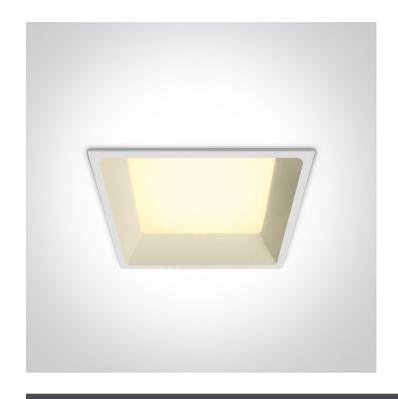

22W Dark Light LED Downlight .

Supplied with 500mA non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Physical Specification

Item Group	06 Downlights Fixed LED
Family	The SMD Dark Light Range
Order Code	50122D/W/W
Colour	White
Material	Die Cast
Shape	Rectangular
Length	170mm
Width	170mm
Height	55mm
Cutout Hole Width	160mm
Cutout Hole Length	160mm
Recessed Ceiling	Yes

Depth Required	75mm
Indoor	Yes
Adjustable	No
Electrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	22W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	40V
Safety Class	
Power(Watts)	20W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
Gear	
Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	12,5-20W
Power Factor	0,9
Constant Current	Yes
500mA	25-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-30? ~ +50?
Housing Material	Plastic
Brand	Lifud
Illumination Data Colour Temperature	3000K
	3000K 1870lm
Colour Temperature	
Colour Temperature Lumen Output	1870lm
Colour Temperature Lumen Output Light Efficiency	1870lm 85lm/W
Colour Temperature Lumen Output Light Efficiency CRI	1870lm 85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	1870lm 85lm/W 80 100°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1870lm 85lm/W 80 100°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1870lm 85lm/W 80 100°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info	1870lm 85lm/W 80 100° Yes
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Pcs/Carton	1870lm 85lm/W 80 100° Yes
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Pcs/Carton Barcode	1870lm 85lm/W 80 100° Yes 20 5291889060796
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Dark Light Packing Info Pcs/Carton	1870lm 85lm/W 80 100° Yes

Warranty	2 Years
Weee Directive	Yes

Certification & Warranty