



30W downlight LED, shop square boxes range IP20, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 750mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

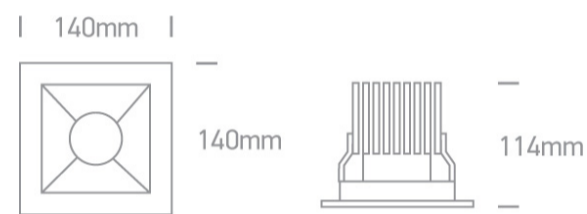

Physical Specification

Item Group	06 Downlights Fixed LED
Family	Shop Square Boxes
Order Code	50130B/B/W
Colour	Black
Material	Aluminium
Shape	Rectangular
Length	140mm
Width	140mm
Height	114mm
Cutout Hole Width	130mm
Cutout Hole Length	130mm
Recessed Ceiling	Yes

Depth Required	120mm
----------------	-------

Indoor	Yes
--------	-----

Adjustable	No
------------	----

Electrical Characteristics

Gear	External-Included
------	-------------------

Fitting + Driver

Input Voltage	220-240V
---------------	----------

50 Hz	Yes
-------	-----

60 Hz	Yes
-------	-----

Safety Class	
--------------	---

Power(Watts)	30W
--------------	-----

IP Rating	IP20
-----------	------

Light Source	LED built in
--------------	--------------

Dimmable	No
----------	----

F Mark	
--------	---

Fitting

Input Type	Constant Current
------------	------------------

Input Current	750mA
---------------	-------

Voltage	35,5V
---------	-------

Safety Class	
--------------	---

Power(Watts)	26,62W
--------------	--------

IP Rating	IP20
-----------	------

Light Source	LED built in
--------------	--------------


LED Type	COB
----------	-----

LED Brand	Sanan
-----------	-------

Gear	Led Driver
------	------------

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	25-30W
Power Factor	0,9
Constant Current	Yes
750mA	33-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	3000K
Lumen Output	2600lm
Light Efficiency	86,67lm/W
CRI	80
Beam Angle	30°
Illumination Diagram	

Packing Info

Box Length	16cm
Box Width	16cm
Box Height	13cm
Pcs/Carton	16
Barcode	5291889061441
HS Code	9405409900

Energy Label



Certification & Warranty

Warranty

3 Years

Weee Directive

Yes