Control of Ultra-Fine Particulate Emissions

Compendium: State-of-the Art Technology Review

Dr. Henry V. Krigmont, QEP
Allied Environmental Technologies, Inc.
USA
alentec@alentecincc.com

1 Summary / Abstract:

Recent research findings have shown that fine, sub-micron particles suspended in the air cause a much greater negative health effect than had previously been suspected. These findings will very likely result in more stringent ambient air quality standards than the current PM-10 (particles less than 10 micrometers). Scientists expect the standard will likely be reduced to PM-2.5 or even PM-1.0.

The primary state-of-the-art technologies for particulate control are **F**abric **F**ilters (FF or baghouses) and **E**lectrostatic **P**recipitators (ESPs). However, each of these has limitations that prevent them from achieving ultra-high collection of fine particulate matter.

MSC™ is a new concept for particulate control. The intent of the MSC™ is to combine the best features of the two-stage ESP and a FF in a manner that has never been done before. The principal objective of the MSC™ is to substantially improve fine particulate collection by combining both electrostatic charging/collection and filtration processes, not only by separating zones for particle charging and collecting, but, by providing a new unique collector design with improved efficiency to collect high resistance fine particles. The MSC™ technology benefits and its major differences from other technologies will be apparent from the following discussion.

2 Ultra-High Particulate Collection

The purpose of a particulate collector is to provide as high a level of control as is practically possible while keeping the overall power consumption at the reasonable level.

2.1 Fabric Filters or Baghouses

Current **F**abric **F**ilters (FF) can achieve 99.9% collection efficiency, and, when advanced fabrics are employed fabric filters can achieve 99.99% collection efficiency with no significant deterioration in performance for sizes from 0.1 to 1.0 μm. However, FFs cannot routinely achieve that level of control for all applications within economic constraints. Fabric filters sometimes also have problems with bag cleanability and high-pressure drop, resulting in a very conservatively designed, large, and costly baghouses.

One approach to make fabric filters more economical is to employ smaller baghouses called **P**ulse **J**et (PJ) filters that operate at much higher **F**ace **V**elocity (FV) ratios. The primary factors that determine collection efficiency in a FF are dust properties such as particle size and cohesive characteristics, pore size and porous media properties, pulse-cleaning frequency, and FV. However, studies have shown that collection efficiency is likely to significantly deteriorate for a given porous media when FV is increased.

2.2 Electrostatic Precipitators

State-of-the-art ESPs can provide 99.9% total mass particulate control, but collection efficiency for 0.1- to 1.0-μm particles is significantly lower. The most common form of electrostatic precipitator used for industrial gas cleaning is the so-called single-stage type in which the corona generating electrodes are used to charge the dust particles and act as the precipitating field electrodes. The flow in such a precipitator is in a fully turbulent range and the turbulence is further increased by the effect of electric wind resulting from the corona discharge. The turbulent flow velocity is high when compared with the velocity of particles in the gas under the influence of the electric field. For this reason, the fundamental electrostatic

equations cannot be used to calculate precipitator performance.

There is a further important effect: due to the turbulence, a number of factors, one of which is the frequency with which it is brought into proximity of the receiving or **C**ollecting **E**lectrode (CE), determine the probability of a dust particle being captured by the CE. This is the main reason why a precipitator, although somewhat less effective on fine particles, does not fall off so badly as the theoretical migration velocities calculated from pure theory of the motion of a charged particle in an electrostatic field would suggest.

2.3 Basic Principles of the ESP Process

An electrostatic precipitator must provide three essential functions:

- the suspended particles must be given an electric charge;
- the particles must be subjected to an electric field to enable them to migrate from the gas stream to a suitable collecting electrode, and
- the collected material mush be removed from the collecting electrode in an efficient manner and deposited in a receptacle with the minimum amount of loss.

In an ESP the charging occurs by two mechanisms: diffusion charging and field charging. Diffusion charging occurs when ions in the gas collide due to Brownian motion with particles and transfer their charge to them. Field charging occurs when a particle is located within an electric field that contains ions.

2.4 Fine Particulate Collection

Migration velocity, **ω**, is the velocity that a charged particle achieves in a quiescent gas. It is a balance between the Coulombic (or electrical), viscous, and inertial forces [1]. In practical terms, this means that the larger particles are more easily collected than the smaller ones. The exception is those smaller particles whose charging is dominated by the diffusion process and are generally easily collected because of their inherent Brownian motion. Furthermore, it is desirable for the precipitator to operate with voltages as high as possible for maximum collection efficiency. For the particles, approximately 0.2 to 0.8 μm, neither diffusion or field charging dominate resulting in the lowest migration velocities, which are the most difficult to collect in an ESP.

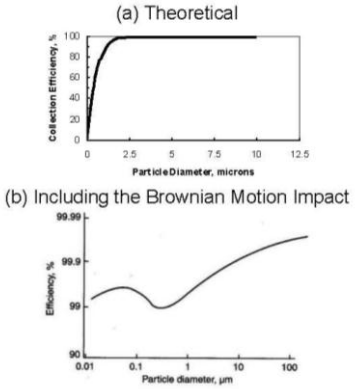


Figure 2-1. ESP Collection Efficiency as a Function of Particle Size

Figure 2-1 shows comparison between a typical theoretical (a) and "actual" (b) collection efficiency versus particle size relationship for an ESP. As can be seen, for sizes below 1 to 2 microns (μm), the collection efficiency rapidly degrades.

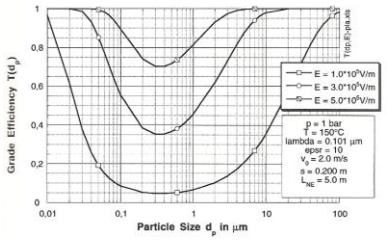


Figure 2-2. The Grade Efficiency for a Plate-Type Precipitator Zone

A small increase in the efficiency could be observed in the sub-micron particle range (less than 0.1 μm) due to the improved collected because of their inherent Brownian motion. Figure 2-2 demonstrates the strong influence of electric field strength on performance in a 5 m precipitator zone. The typical minimum efficiency at around 0.3 – 0.4 μm is shifted from 5% up to 70% by increasing the field from 1.0 to 5.0x10^5 V/m [2].

2.5 Space Charge and Corona Quenching

It is a well-known fact that the electrical charge imparted on the aerosol particles is proportional to the electrical field and particle size. Furthermore, the effective migration velocity that determines the collection efficiency is also proportional to the applied electrical field that moves the charged particulate from the gas stream towards (a) collecting plates and/or (b) bags. Therefore, in order to effectively charge and collect the sub-micron particulate, the collecting device must provide first, effective and rapid particulate charging, and second, to be able to operate with an extremely high electrical field.

Additionally, while dealing with the sub-micron particulate/aerosol collection, there is a significant concern with the effects of space charge and/or corona quenching effects.

With the discharge electrode at the negative potential, which is the usual arrangement in most industrial applications, positive ions generated are attached to the discharge electrode and negative ions travel towards the grounded electrode. Although an equal number of positive and negative ions are generated in the corona region, almost 99% of the gas space between the corona and the grounded electrodes becomes filled with only negative ions. This forms a space charge of high opposing voltage, which limits corona current. Space charge is a phenomenon, which could be defined as a charge present in the inter-electrode space (between two or more oppositely charged electrodes) due to a flow of ions or a cloud of the charged particles.

Since the mobility of the charged dust is much lower than the mobility of the ions and electrons, the cloud of charged dust represents a significant increase in space charge that tends to quench the corona current. In electrostatic precipitation practice, it is known that in spite of very high potentials impressed upon the electrodes, essentially no discharge or corona current can be made to flow through the dust-gas mixture; the collection efficiency (under these conditions) is relatively low, although a considerable part of the suspended material is still separated from the gas.

The space charge imposed by the cloud of the charged particulate matter, however, would be greatly dependent on the particle size distribution, for a few big particles or a large number of the smaller ones could represent the same particulate mass. This would present more problems when dealing with the cloud of the charged fumes or smoke with MMD of less than 1 micron (sub-micron range). Assuming further that the mobility of the particulate is somewhat similar, the cloud of the finer charged matter could present a barrier (or obstacle) to the ions in their quest to carry charges from one electrode to the other. Hence, the other phenomenon called “corona quenching.”

2.6 Dust Resistivity and Back Corona

In the operation of ESPs it was found that if the electrical resistivity of the particulate matter is excessively high, the result is a condition well known in the art of electrostatic precipitation called back ionization or back corona. When this occurs the gas in the interstitial spaces of the particulate matter and the filter media ionizes and injects ions of opposite polarity into the gas space that disrupts the charging process and non-uniform collection mechanism. Consequently, the inter-electrode space would become saturated with the bi-polar ions and bi-polar charged particulate.

3 Hybrid Technologies.

FFs work well for many dust as long as the cohesive strength of the dust is not too high or too low. However, highly cohesive dust can lead to problems with bag cleanability and high pressure drop, and dust with low cohesive strength can promote dust bleed through resulting in higher emissions. ESPs work well (at least up to their theoretical potential) as long as the dust resistivity is in the range from about 10^8 to 10^{11} ohm-cm, but deteriorate significantly for high- or low-resistivity dust.

Furthermore, neither technology will work effectively with the submicron particulate matter as fine particulate shall pass directly though the filter material or would require a

substantial time to become charged in the electric field to be precipitated.

It had been found that the electrical enhancement of the fabric filtration provides for a system with a far less pressure drop than that of a bag filtration unit alone [8, 9]. Charged fine particles tend to follow electric field lines, which terminate upon the filter medium, rather than the gas streamlines that flow through open paths through the material. This discovery led a completely new group of the particulate control devices called HYBRID Collectors.

3.1 Compact Hybrid Particulate Collector

In accordance with the COHPAC concept, a high ratio pulse jet fabric filter collector is installed in series with an existing, energized electrostatic precipitator, serving as the polishing or final collection device.

Conceptually, because the ESP removes the majority of the dust prior to entering the fabric filter, the filtration rate (air-to-cloth-ratio) can be increased substantially while still maintaining the same pressure drops as conventional filtration rates. It is also believed that the ESP serves as a pre-charger and helps agglomerate the dust particles into a larger and more porous structure, which should aid in the filtration process.

However, in the ESP/FF installation in series, the particulate matter that reaches the fabric filtration bags will predominantly contain fine fractions. The collection of fine particulate matter fractions will generally result in a higher resistance to flow across the filter medium than will the larger particulate size distributions. Additionally, as the ESP serves as a pre-collector in this hybrid filter, all high resistivity dust problems like back corona, etc. will result in serious performance deterioration.

3.2 Advanced Hybrid Particulate Collector

The **A**dvanced **H**ybrid **P**articulate **C**ollector (AHPC) concept consists of a combination of fabric filtration and electrostatic precipitation in the same shell [5].

In a typical pulse-jet baghouse, the dust is collected on the outside of the bags while the flue gas passes through the fabric, then exits through the top of the bags into the clean air plenum. In the original AHPC concept, approximately three out of four rows of bags are removed and a grounded plate is placed between each two rows of bags.

In the original concept, the high-voltage corona discharge electrodes (wires or rigid electrodes) are installed between each plate and row of bags. Subsequently, in order to protect bags from intense sparking between the discharge electrodes and the grounded bags, the original geometry was replaced with a tri-electrode system, where the perforated grounded collecting electrodes surrounded bags in a box-like manner. The perforated collecting plate, besides capturing the charged particles, also serves as protection for filter bags from potential electrical damage from the electric field. The collecting plates and discharge electrodes are periodically cleaned using typical rapping methods.

It should be noted that the tri-electrode system, with the bags completely enclosed in the box-like grounded structure, most likely would act as a grounded screen preventing penetration of the charged particles towards the bags. Hence, the particles, which did eventually reach the bags, will be collected by a “conventional” mechanism and will not produce the desired porous dust cake with lower porosity and the pressure drop. Moreover, as the ESP portion serves as a pre-collector in this hybrid filter, the high resistivity dust problems will also result in serious performance deterioration.

The full-scale Advanced Hybrid installation at the Big Sandy power plant of the Otter Tail utility that began operation with very good results, virtually collapsed shortly after startup of the retrofit, due to the performance problems that began to occur and continued for the next two years [6]. These problems included a high tubesheet differential pressure exceeding 10” w.g., causing continuous cleaning with pulse

pressures raised to between 100 to 110 psi and bag failures occurring within 6 months. The results of these problems were boiler derates of 30 to 50 MW due to ID fan limitations with the high bag pressure drops and the stack opacity exceeding the 20% limit due to bag failures. Ultimately, the Advanced Hybrid system was converted to a conventional pulsejet baghouse.

The high pressure drop operation, in our opinion, was caused by the "revised" design where the grounded collecting electrode system enclosed each raw of bag in a box-like grounded screen. These grounded screens prevented charged particles reaching the bags surface. Therefore, the dust, while penetrating the grounded collecting plates, for the most part lost its initial charge, thus greatly diminishing the charged porous dust cake effect that was supposed to improve the dust cake properties and reduce the pressure drop.

3.3 Electrostatically Enhanced Fabric Filtration – ESFF/MAX-9

The concept of the **E**lectrostatically **E**nhanced **F**abric **F**iltration (ESFF) is based on the fact that the electrical enhancement of the fabric filtration provides for a system with a far less pressure drop than that of a bag filtration unit alone [7, 8, 9].

GE Energy licensed this concept from EPA and designated it as MAX-9. It is claimed that the negative corona discharge provides two distinct mechanisms for increasing performance of the fabric filter. Once the incoming dust is charged:

- The negative charge causes individual particles to repel each other in the dust layer, reducing pressure drop.
- Negatively charged fine particulates are repelled from the "like" charged dust layer.

As a result, collection efficiency increases, and system pressure drop decreases. The potential pitfalls of this hybrid design will be addressed later.

3.4 Multi Stage Collector – MSC™

MSC™ is a new concept for particulate control [10, 11]. The MSC™ concept can be broadly summarized as a system in which multiple stages are utilized, where each stage performs its primary function, and the multiple stages operate synergistically to provide significantly improved overall performance. The principal objective of the MSC™ is to substantially improve fine particulate collection by combining both electrostatic charging/collection and filtration processes. It separates zones for particle charging and collecting, thus providing a new unique collector design with improved efficiency to collect high resistance fine dust particles.

MSC™ offers a uniquely compact concept (Figure 3-1) utilizing an upstream stage comprised of a generally conventional electrostatic precipitator followed by a downstream zone comprised of the parallel surfaces that create uniform electric field, followed by yet another stage which incorporates **B**arrier **F**ilter (BF) the external surfaces of which provide a uniform electric field.

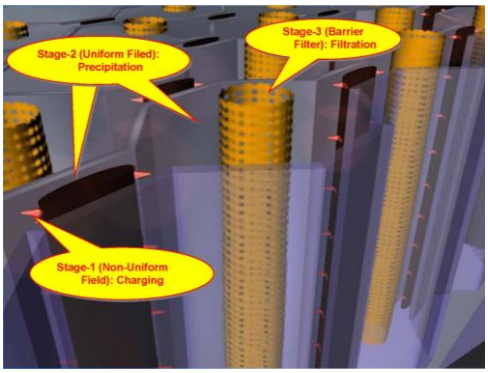


Figure 3-1. MSC™ - Conceptual Design

The spacing between the discharge points (corona sources) and collecting surfaces are different, wider in the charging or corona generating zones and narrower in the collecting ones where a high-tension uniform electric field is required. This feature allows for the use of a single high voltage power source for all electrostatic fields (in all zones).

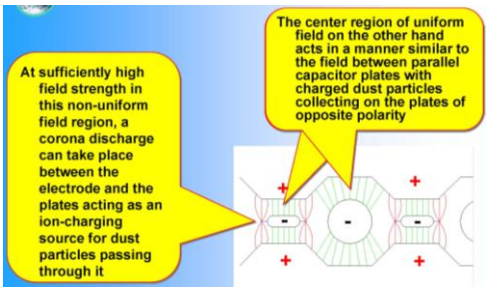


Figure 3-2. MSC™ - Operation

The MSC™ is engineered in such a way that both barrier filters (bags) and the discharge electrodes are grounded, therefore, the high voltage in the MSC™ device is not limited by a concern of the sparking towards the bags (Figure 3-2). Hence, it could operate with the maximum possible applied high electric field to ensure the most effective sub-micron particulate charging and collection.

In MSC™, particles are deposited onto the BF by two mechanisms: electrostatic and diffusional deposition that act simultaneously. Collection by diffusion occurs due to both fluid motion and the Brownian (random) motion of particles. Diffusional collection effects are most significant for particles less than 1 micrometer (μm) in diameter. Another collection mechanism, direct interception, occurs when a particle comes within one particle radius of an obstacle. The path that the particle takes can be a result of inertia, diffusion, or fluid motion. On one hand, electrostatic deposition is effective for relatively large particles but it is quite ineffective for the ultra-fine ones because their charging probability, in the corona field, is too low. On the other hand, the diffusional collection efficiency of particles on fibers is high for small particles but low for larger ones[14].

Therefore, the simultaneous diffusional-electrostatic collection is a useful technique for efficient filtration of particles below 0.1μm. Alonso, et al.[15] reported superior performance of an electrostatic precipitator in which the collector electrode has been substituted by a series of wire screens transposed to gas flow. The particles deposition by diffusion was highly efficient for particle diameters in the range of only few nanometers. The larger particles are collected by conventional electrostatic deposition.

The combination of both mechanisms, led to high particle collection for the entire particle size range below 0.1μm. Mermelstein, et al. [16] conducted a study to investigate the effect of using stainless steel fibrous and porous filters as the ground electrode of a point-to-plate electrostatic precipitator on particle penetration. The effect of filter medium structure and pore size on particle removal has been investigated as a function of particle size for particles in the range of 0.03-1μm and filter FV's in the range of 15-75 cm/s (29-147 ft/m). The application of the electrical field decreased particle penetration by a factor of 6 to 54. The experiments confirmed that sub-micron particles were captured in the first few layers of the filters by the action of electrostatic forces.

3.5 Test Results

The Proof-of-Concept phase has been completed using real combustion gases on a working prototype of the MSC™ that was designed to operate with FV in the range of 3.59 to 28.73 ft/min range. Figure 3-3 depicts an improved performance, which can also be seen in the pressure drop characteristics and cleaning intervals.

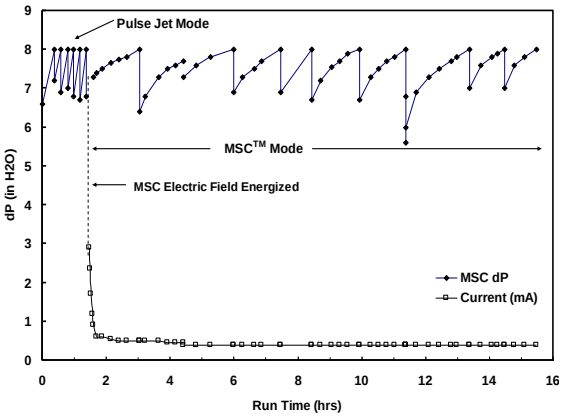


Figure 3-3. Operating Pressure Drop Comparison

Figure 3-4 shows the unit operation characteristics: with the electrical field off, the particle collection efficiency improved from 99.71 to 99.81% as the pressure drop increased, but then the efficiency began to

decline as the differential pressure approached 8 inches H_2O.

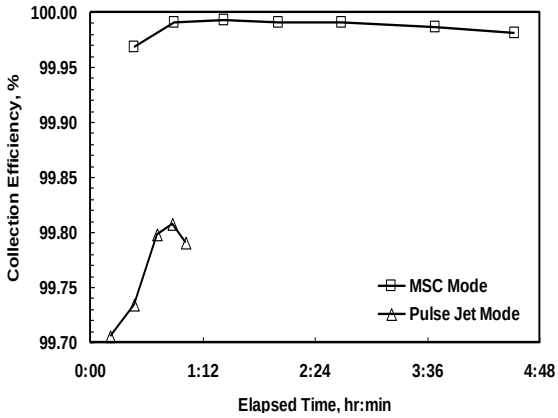


Figure 3-4. Collection Efficiency Comparison

With the electrical field energized (MSC™ mode), the particle collection efficiency was markedly higher than for pulsejet operation: up to 99.99%. Further, the collection efficiency was essentially constant over the entire range of pressure drop up to 8.0 inches H_2O.

Figure 3-5 shows the particle size distributions measured. The inlet showed a mass mean diameter of about 38 microns. In the pulse jet mode, the largest outlet particle size that was measured was 17 microns. In the MSC™ mode, the largest outlet particle size was only 7 microns. The higher collection efficiency in the MSC™ mode is also apparent in Figure 3-5.

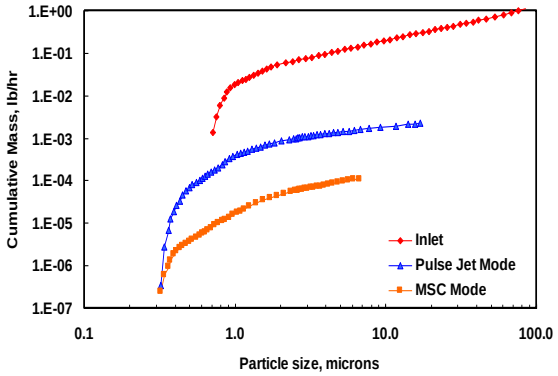


Figure 3-5. Particle Size Distribution Measured

3.6 Independent Research

Researchers in Korea [17] have tested various hybrid configurations, as shown in Figure 3-6.

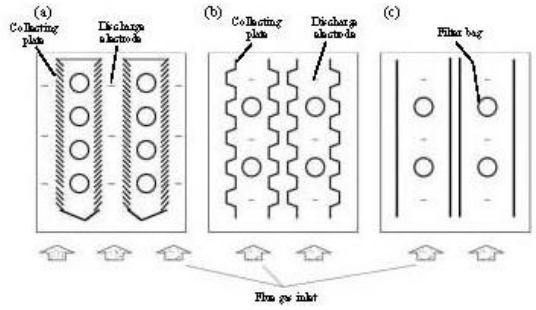


Figure 3-6. Korean Research Configurations

It is interesting to note, the center configuration in Figure 3-6 is somewhat similar to the MSC™

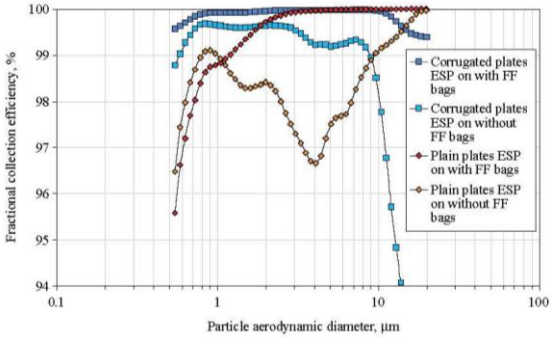


Figure 3-7. Fractional Collection Efficiency

configuration (although they used commercially available un-optimized corrugated plates and the bags were located in every other wide space created by the plates) while the configuration on the left is more like the Advanced Hybrid™ with ESP and fabric filtration in series.

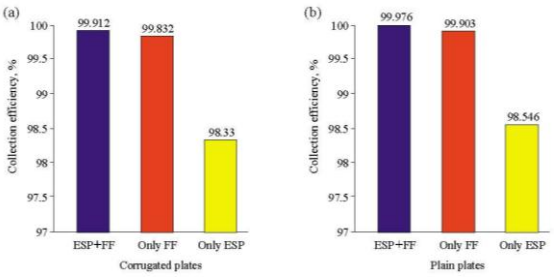


Figure 3-8. Efficiency Comparisons

The configuration with the plain plates on the right also closer approaches the MSC™ with ESP and fabric filtration occurring in parallel. The pilot scale test results were similar to the MSC™ results. Both the corrugated and plain plate configurations were very effective in

collecting $PM_{2.5}$ particles (Figure 3-7 and Figure 3-8).

4 Discussion

4.1 Earlier Developments – General Issues

Earlier attempts at combining fabric filters and electrostatics have involved several different concepts:

1) precharging the particles upstream of a baghouse,
2) weaving the alternative polarity electrodes into the bags,
3) weaving the grounded electrodes into the bags and then installing a high-voltage electrode at the center of the bags,
4) installing high-voltage wires between pulse-jet bags (ESFF/MAX9), and
5) installing a high-ratio baghouse behind an ESP (the EPRI COHPAC concept).

Precharging provided some pressure drop advantages, but all of the dust was still collected on the bags, so the advantage did not warrant the cost. In the case of installing electrodes in the bags, reliability has been the major problem, and the electric field strength is very limited. In addition, any sparking tended to cause rapid deterioration of the fabric, and the bags still had to handle all of the dust. The concept of installing a high-voltage electrode in the center of bottom-entry bags provided improved electric field strength, but there was still concern over the effect of sparking on bag life

For electrostatically enhanced baghouse to be economical, it must operate at high FV ratios, from 12–20 ft/min. Some benefit is seen because of the particle charging, but bag cleanability is still a major problem at the high FV ratio. To help solve this problem, off-line cleaning had been recommended. This would add complexity and require additional filtration area to prevent excessive pressure drop during the off-line period. Moreover, the benefit of off-line cleaning is questionable in cases where the dust is significantly redispersed. For example, the settling velocity of 10-μm particles is only 0.5 cm/s. The time required for these particles to effectively reach the hopper is over 10 minutes. For smaller particles, the time would be significantly longer.

The high-resistivity dusts will cause problems with the ESP portion of the hybrid filters, just as they do with state-of-the-art ESPs due to the bi-polar charged particulate. High-resistivity dust will increase the portion of the total dust that the filter must handle, which will make pressure drop control more difficult.

4.1.1 Advanced Hybrid.

The Advanced Hybrid operates as a precipitator and the PJ in series, thus making it not very suitable for the sub-micron particulate efficient collection since the precipitator's performance is significantly diminished in the sub-micron particulate range. Moreover, as soon as the back corona or the quenching phenomena initiates, the precipitator section efficiency significantly diminishes and therefore the overall unit performance. In addition, as discussed previously, the box-like grounded screens encompassing the bags, may prevent the charged particulate reaching the bags, hence, in fact, nullifying all benefits of the charged dust cake on the bags surface. Furthermore, the high-resistivity dust will cause the back corona in the ESP section, which, in turn, would result in a significantly higher dust loading in the FF section, hence violating the design balance resulting in a higher emissions.

4.1.2 ESFF-MAX-9.

In this hybrid design, the corona discharge electrodes serve two functions, i.e. to impart a charge to the particulates carried by the incoming gas stream and to establish an electrical field running through the filter fabric to the grounded support frame. It is necessary to operate the corona discharge electrodes of the filter precharger at an electrical operating voltage above what is known as the corona onset voltage. The corona onset voltage is that voltage at which the gas immediately adjacent to the corona discharge electrode starts to ionize. The corona onset voltage mainly is a function of the gas temperature and density, corona discharge electrode diameter, and its distance from the opposite electrode or a bag as in this case. The corona onset

voltage for an electrode increases with its diameter and distance from the bags.

The high-resistivity dust deposited on the filter bags will result in a condition well known in the art of electrostatic precipitation called back ionization or back corona. When this occurs the gas in the interstitial spaces of the particulate matter and the bags surface ionizes and injects ions of opposite polarity into the gas space. This will result in bi-polar charges that disrupt the charging process and disrupt the collection.

Furthermore, in an ESFF/MAX9 device, the charging electrodes are located in the close proximity to the bags, hence to overcome sparking towards the bag, which would cause the bag puncture and subsequent failure, it is necessary to maintain operation below the sparking level. This contradicts the requirements of the effective sub-micron particles charging and collection: i.e. in order to effectively charge the submicron and nano-particulate material, the highest attainable applied voltage would be required.

Additionally, if space charge occurs, instead of dealing with it by increasing the applied voltage to overcome the charged particulate cloud, the system would have to retain the reduced voltage in order not to overcome the sparking threshold.

4.1.3 Multi Stage Collector (MSC™)

The MSC™ is engineered in such a way that both barrier filters (bags) and the discharge electrodes are grounded, therefore, the applied high voltage in the MSC™ device is not limited by a concern of the sparking towards the bags (Figure 4-1). Consequently, it can operate with the maximum possible applied high electric field to ensure the most effective sub-micron particulate charging and collection. Furthermore, by utilizing combination of single- and two-stage electrostatic precipitation (Figure 3-2), the MSC™ technology offers the best possible combination of the non-uniform and uniform high-tension electric fields for the most effective sub-micron aerosol charging and collection. As the applied voltage is not limited by a concern of the sparking towards the bags, the MSC™ can continue its operation with the maximum applied high electric field to ensure the most effective sub-micron particulate charging and collection.



Figure 4-1. MSC™ Operation - Major Differences

Clearly, the MSC™ technology offers the way to manage the detrimental influence of the space charge and corona quenching. Furthermore, in the event of the back corona, the MSC™ will continue to effectively collect particles of both polarities irrespective of the discharge electrode system polarity (Figure 4-2).

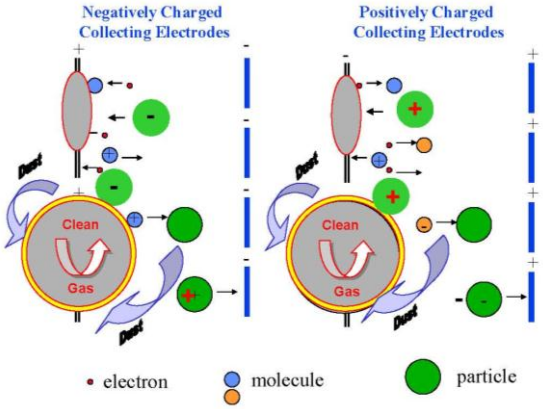


Figure 4-2. MSC™ Operation - Bi-Polar Particulate Collection

There, the dust particles, which were charged to negative polarity, will be caught by either the uniform field-forming parts of the DE, or the bags when the collecting electrode charged negatively. Meanwhile, the dust particles near the collecting electrode, which have been charged to a positive polarity by the positive ions resulting from reverse ionization, are conveniently collected by the collection electrode charged negatively (left-hand portion of the Figure 4-2). In the event when the collecting electrodes are charges positively,

the process is reversed (right-hand portion of the Figure 4-2).

5 Summary & Conclusions

The MSC™ by virtue of synergistically incorporating ESP and FF technologies offers significant improvement over the existing technologies.

While very large ESPs are required to achieve >99% collection of the fine particles, a small ESP can remove 90% to 95% of the dust. In the MSC™ concept, the ESP plate area (including the surfaces of the BF) would be used to remove approximately 99% of the dust and to sufficiently capture the reentrained dust after bag cleaning. Therefore, the filter area could be held to a minimum to keep the cost reasonable. Very likely, the MSC™ will be able to operate at 20-25 ft/min. At a FV ratio of 16 ft/min, the total plate and fabric collection area would be about 77% less than either the conventional baghouse or ESP. Thus, the MSC™ has significant potential to be much more cost effective than existing technologies. Furthermore, the MSC™ design completely eliminates any potential for sneakage seen in conventional ESPs, since all the flow must pass through the bags.

Additionally, no other hybrid technology is capable to effectively collect the bi-polar charges and charged particulate material. In the MSC™ design where the bags and the discharge electrodes are grounded, there is no danger of the electrical sparking towards the bags, hence, the MSC™ unit should be able to operate at the maximum applied voltage for the best possible fine particulate material charging and collection.

To summarize:

- MSC™ technology offers significant energy-savings.
- MSC™ is suitable for the new installations or as a retrofit replacement technology for existing particulate collectors as well as an add-on retrofit technology.
- MSC™ solves the problem of excessive fine-particle emissions with conventional technologies.
- MSC™ greatly reduces the problem of higher fine particulate emissions from conventional baghouses.
- MSC™ solves the problem of reentrainment and recollection of dust in conventional pulsejet baghouses caused by the close bag spacing and the effect of cleaning one row of bags at a time.
- MSC™ requires significantly less total collection/filter area than conventional ESPs and baghouses.
- MSC™ requires significantly smaller footprint area than conventional ESPs or baghouses.
- MSC™ overcomes hurdles that prevent operation at high FV ratios.
- MSC™ reduces the applicability problem for ESPs with high-resistivity dusts.
- MSC™ requires significantly less filter surface area than conventional fabric filter.

6 Literature

1. **White, H.** "*Industrial Electrostatic Precipitation*." 1963. Reprinted by the International Society for Electrostatic Precipitation.
2. **Edited by Parker, K. R.** "Applied *Electrostatic Precipitation*." Blackie Academic & Professional, an Imprint of Chapman & Hall. First edition 1997.
3. **Chen, Ramsay**. "*Compact hybrid particulate collector*." US Patent № 5,024,681, 1991.
4. **Chen, Ramsay**. "*Compact hybrid particulate collector (COHPAC)*." US Patent № 5,158,580, 1992
5. **Miller, S., Schelkoph, G, Dunham, G; Walker, K; Krigmont, H**. "*Advanced Hybrid Particulate Collector, a New Concept for Air Toxics and Fine-Particle Control.*" Presented at EPRI-DOR-EPA Combined Utility Air Pollution Control (MEGA) Symposium. Washington, D.C. August 25-29, 1997
6. **Lugar, Thomas W.et al.** "*The Ultimate ESP Rebuild: Casing Conversion To a Pulse Jet Fabric Filter, a Case Study."*
7. **Hovis, et al**. "*Enhanced Fabric Filtration Through Controlled Electrostatically Augmented Dust Deposition."* US Patent № 4,904,283, 1990
8. **Plaks, N**. "*Enhancement of Electrostatic Precipitation with Electrostatically Augmented Fabric Filtration."* US Patent № 6,152,988, 2000
9. **Plaks, N**. "*Enhancement of Electrostatic*

Precipitation with Electrostatically Augmented Fabric Filtration." US Patent № 5,217,511, 1993

10. **Krigmont, Henry**. "*Multi Stage Collector*." US Patent № 6,524,369. February 25, 2003
11. **Krigmont, Henry.** "*Multi Stage Collector and Method of Operation.*" 6,932,857. August 23, 2005
12. **Holve, D., Meyer, P., Muzio, L., Shiomoto, G.**, "*On-Line Insitu Particle Measurements in a Large Scale Coal Fired Furnace*", Paper 88-60, Western States Section of the Combustion Institute, Spring Meeting, March 1988, Salt Lake City.
13. **Andersen, E**. "*On particulate charging, space charge and corona suppression*." Western Precipitation R&D Report – Internal Communications.
14. *"Control Techniques for Particulate Emissions from Stationary Sources - Volume 1"* (EPA-450/3-81-005a, NTIS PB83-127498). U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. Research Triangle Park, North Carolina. September 1982
15. **Alonso, Manuel, et al.** "*Electrostatic Precipitation of Ultrafine Particles Enhanced by Simultaneous Diffusional Deposition on Wire Screens*." JAWMA **52**:1342-1347
16. **Mermelstein, J, et al.** "*Electrostatically Enhanced Stainless Steel Filters; Effect of Filter Structure and Pore Size on Particle Removal*." Aerosol Science and Technology, Volume 36, Number 1; January 2002
17. **Hasolli, N., et al**., "*Evaluation of collection efficiency of the Hi-Filter by comparing the shape of collecting plates*." Korea Institute of Energy Research, 71-2 Jang-Dong, Yuseong-Gu, Daejeon 305-343, Korea, 2007
18. **edited by Hairston, D.** "*Controlling Particulates with ESPs: Hybrid Electrostatic Precipitators … are being developed…*" Chemical Engineering, December 2004