



60x60 UGR 17 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Complete with 1000mA driver.


Complies with standard EN60598-1 and any other specific standards.



## Downloads



## Dimensions

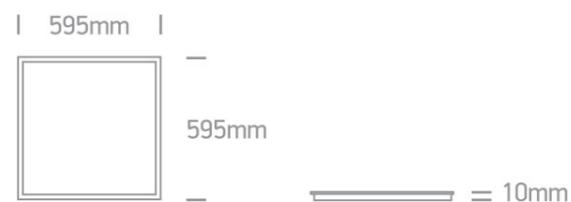

## Accessories



050017

## Related items



89050L



89050TLD

## Physical Specification

Item Group

06 Downlights Fixed LED

Family	Square UGR17 & UGR19 Office Panels Aluminium
Order Code	50140U/W/C
Colour	White
Material	Aluminium
Shape	Rectangular
Length	595mm
Width	595mm
Height	10mm
Recessed T-Ceiling	Yes
Depth Required	55mm
Indoor	Yes
Adjustable	No

#### Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	36V

Safety Class	
Power(Watts)	36W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 4014
LED Brand	Sanan

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	25-42W
Power Factor	0,9
Constant Current	Yes
1000mA	25-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-30? ~ +50?
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	No-Load, Short Circuit

## Illumination Data

Colour Temperature	4000K
Lumen Output	3400lm
Light Efficiency	85lm/W
CRI	80
Beam Angle	120°

Illumination Diagram



UGR

17

## Packing Info

Box Weight

2,4Kg

Pcs/Carton

6


Barcode

5291889054894

HS Code

9405109890

## Energy Label

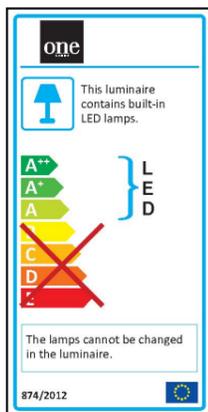

## Certification & Warranty

Warranty

2 Years

Weee Directive

Yes